

# Engineered Metalworking Solutions



## New & Improved

Belts & Accessories  
Wheels & Accessories  
Discs & Accessories

## New Sections

3M Bonded Superabrasives  
3M Abrasives Accessories  
3M Filtration Products



# What's New for 2010



- 1 Scotch-Brite™ Durable Flex Belts** are aggressive and long lasting non-woven belts for deburring, finishing, blending, and cleaning. The reinforced low-stretch backing offers good flexibility and great edge durability. Excellent for portable belt tool, 3M™ File Belt Sander. Scotch-Brite™ Durable Flex Belts can help customers save costs and improve productivity.
- 2 Scotch-Brite™ Metal Finishing A CRS Convolute Wheel** provides better resistance to “chunking” (wears down in consistent, fine swarf). This new formulation offers the same consistent finish you have come to expect from Scotch-Brite™ Metal Finishing Convolute Wheels with twice as much cut and three times longer life. Look to 3M for the industry’s fullest line of non-woven abrasives and count on Scotch-Brite™ products to make your toughest jobs easier.
- 3 3M™ Cubitron™ II Metalworking Belts 984F** are made with revolutionary 3M precision-shaped ceramic grain technology, engineered with ultra-sharp, fast cutting points that wear evenly, run cool, and optimize mineral breakdown to maximize belt life. Whether you are looking for faster productivity, longer life, or reduced heat on parts, Cubitron™ II metalworking belt sets the standard performance for abrasive belts.
- 4 3M™ Cubitron™ II Fibre Discs 982C** are made with revolutionary 3M precision-shaped ceramic grain technology, engineered with ultra-sharp, fast-cutting points that wear evenly, run cool and optimize mineral breakdown to maximize disc life. 982C unique 36+ grade out performs comparable fibre discs on life, cut and cost per grind, guaranteed. Finish more parts with fewer discs regardless of grinding pressure.
- 5 3M™ Flap Disc 546D** is a versatile product that delivers a fast cut, long life, and a smooth finish. Performance and price make these discs a great value and the flap design allows one disc to perform both the grinding and blending steps. Plus, the economic alumina zirconia mineral is ideal for lowering abrasive costs on both mild and stainless steel applications.
- 6 3M™ AZ Belt 577F** Because new 3M™ AZ Belts 577F last up to 20% longer than competitive belts, you can grind more parts for about the same price you’re now paying for abrasives. Its new and improved premium mineral resin system, tough durable backing, and waterproof grinding aid offers a big bang for your buck. Their outstanding balance of high performance and affordability make 3M AZ Belts 577F an ideal alternative for many day-to-day grinding operations.
- 7 3M™ Scotch-Weld™ Adhesives** provide a full line of Instant Adhesives (CAs) with a wide range of viscosities as well as cure speeds for metal bonding. 3M™ Scotch-Weld™ Adhesives also include a wide range of Anaerobics for sealing, retaining, and gasketing of all kinds of metal applications. For instant bonds, as well as all of your sealing and gasketing applications, turn to 3M™ Scotch-Weld™ products to fulfill your needs for metal working solutions.
- 8 3M™ Flexible AO Belts 302D and 332D** are new low cost, flexible aluminum oxide belts. 302D has a flexible J weight backing for finishing highly contoured parts and 332D has a flexible X weight backing for added durability for finishing semi-contoured parts. Now, along with 341D, 3M offers a full range of backing flexibilities at an unexpected price from the brand that stands for quality.
- 9 3M™ E-A-R™ Products** 3M is proud to have 3M™ E-A-R as part of our safety products offering. The advanced engineering and technology inherent in the 3M™ E-A-R products fits with the high standards of innovation and quality that you, our customers, come to expect from 3M.

## Coated Abrasives



- Fibre Discs . . . . . 3–5
- Flap Discs . . . . . 6–8
- Stikit™ and PSA Discs . . . 9–12
- Roloc™ Discs . . . . . 13–18
- Belts . . . . . 19–36
- Sheets and Rolls . . . . . 37–39
- Flap Wheels . . . . . 40–41
- Specialty . . . . . 42–44

## Surface Conditioning Abrasives



- Scotch-Brite™ Discs . . . 45–51
- Roloc™ . . . . . 46–48
- Hook-and-Loop . . . . . 49–50
- TN Quick Change . . . . . 51
- Spindle Mount . . . . . 51
- Scotch-Brite™ Belts . . . . 52–54
- Scotch-Brite™ Wheels . . . 55–62
- Scotch-Brite™ Brushes . . . . 62
- Scotch-Brite™
- Bench Area/Specialty . . . . 63
- Scotch-Brite™
- Hand Pads/Rolls . . . . . 64–65

## Kits and Packs



- Abrasive Kits/Packs . . . . . 66

## Accessories



- Abrasive Accessories . . . 67–72

## Bonded Abrasives



- Bonded Type 27 Wheels . . . . 73
- Cut-Off Wheels . . . . . 74

## Superabrasives



- Dressing and Truing
- Tools . . . . . 75–77

## Abrasive Grade Guides

	P12	
	P16	
16		
	P20	

- Abrasive Grade
- Comparison Guide . . . . . 78
- Scotch-Brite™
- Product Guide . . . . . 78

## Adhesives and Tapes



- Structural and Non-Structural
- Adhesives . . . . . 79–85
- Scotch-Weld™
- Adhesives . . . . . 86–87
- Tapes/Masking/
- Dispensers . . . . . 88–99

## Safety



- Respirators . . . . . 100–103
- Speedglas™ Helmets . . 104–105
- Hearing Conservation . . 106–107
- Protective Eyewear . . . . . 108
- Sorbents . . . . . 109

**SAFETY WARNINGS** 110

## Maintenance and Repair



- Maintenance Aerosols . . . . 111
- Electrical . . . . . 111
- Facility Care . . . . . 112
- Utility Cloth Rolls . . . . . 112

## Filtration



- 3M™ Purification Series
- NB Liquid Bag Filters . . . 113


## 3M™ Fibre Disc Selection Guide

Select Fibre Discs for fast cutting when grinding and blending.

	Product ID	Mineral	Metal Type
<b>Good</b>	<b>381C</b>	Aluminum Oxide	Carbon Steel
	<b>501C</b>	Alumina Zirconia	Stainless/Aluminum
<b>Better</b>	<b>501C</b>	Alumina Zirconia	Carbon Steel
	<b>785C</b>	Ceramic Aluminum Oxide Blend	Stainless/Aluminum
<b>Best</b>	<b>988C</b>	Ceramic Abrasive Grain	Carbon Steel
	<b>985C</b>	Ceramic Abrasive Grain	Stainless/Aluminum
<b>Premium</b>	<b>982C</b>	Precision Shaped Ceramic	Carbon Steel



95298

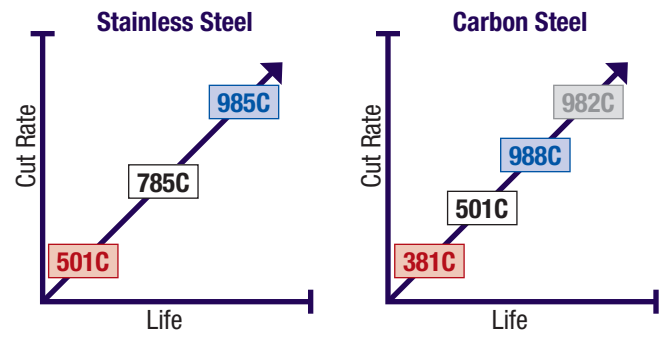

## 3M™ Fibre Discs

Choose the performance level that fits your needs with a complete offering of 3M™ Fibre Discs. Get great performance at a great price with 3M's general purpose metalworking disc 381C. Or, set a new standard for productivity with 3M™ Cubitron™ II 982C Discs. All of 3M's fibre discs are available in a variety of sizes.

### 3M™ Fibre Discs 381C

- General purpose disc for weld removal, grinding and blending
- Resin bond aluminum oxide provides durability and aggressive stock removal



159094

UPC	Grade	Max. RPM	Dia. x Ctr. Hole	Min./Case
051144-77595-8	24	13,300	4-1/2" x 7/8"	25
051144-77596-5	36			
051144-77597-2	50			
051144-77598-9	60			
051144-77599-6	80			
051144-77600-9	100			
051144-77601-6	120			
051144-81369-8	24	12,000	5" x 7/8"	
051144-81372-8	36			
051144-81375-9	50			
051144-01727-0	60			
051144-20054-2	80			
051144-20053-5	100			
051144-20052-8	120			

### 3M™ Fibre Discs 381C (cont.)

UPC	Grade	Max. RPM	Dia. x Ctr. Hole	Min./Case
051144-01745-4	16	8,600	7" x 7/8"	25
051144-81370-4	24			
051144-81373-5	36			
051144-81376-6	50			
051144-01741-6	60			
051144-01740-9	80			
051144-01739-3	100			
051144-01738-6	120	6,600	9-1/8" x 7/8"	
051144-81371-1	24			
051144-81373-5	36			
051144-81377-3	50			
051144-01762-1	80			
051144-01761-4†	100			
051144-01760-7†	120			

† Made-to-Order

See pages 67–72 for available accessories.

### 3M™ Fibre Discs (cont.)

#### 3M™ Fibre Discs 501C

- Versatile disc for use on a wide variety of metals
- Aluminum zirconia provides a good option for both stainless and mild steel applications



51773

UPC	Grade	Max. RPM	Dia. x Ctr. Hole	Min./Case
051111-50409-3	24	13,300	4-1/2" x 7/8"	25/100
051111-50413-0	36			
051111-50414-7	50			
051111-50415-4	60			
051111-50416-1	80			
051111-50417-8	100			
051111-50419-2	120			
051111-50410-9	24	12,000	5" x 7/8"	
051111-50412-3	36			
051111-50420-8	50			
051111-50421-5	60			
051111-50422-2	80			
051111-50423-9	100			
051111-50424-6	120			
051111-50411-6	24	8,600	7" x 7/8"	
051111-50426-0	36			
051111-50425-3	50			
051111-50427-7	60			
051111-50428-4	80			
051125-63799-2†	100			
051111-50430-7†	120			
051111-50432-1†	24	6,600	9-1/8" x 7/8"	
051111-50433-8	36			
051111-50434-5†	50			

† Made-to-Order

#### 3M™ Fibre Discs 785C

- 3M™ Ceramic Aluminum Oxide blend abrasive grain
- An excellent starting point for stainless steel
- Includes a grinding aid for cooler running



60875

UPC	Grade	Max. RPM	Dia. x Ctr. Hole	Min./Case
051111-60719-0	36	13,300	4-1/2" x 5/8-11*	25
051144-80660-7	36	13,300	4-1/2" x 7/8"	25/100
051144-80661-4	50			
051144-80662-1	60			
051144-80663-8	80			
051144-80665-2	P120			
051144-13931-6	24			
051144-13930-9	36			
051144-13928-6	50			
051144-13977-4	60			
051144-13926-2	80			
051144-80654-6	P100			
051144-80655-3	P120	8,600	7" x 5/8-11*	
051144-88831-3†	60		7" x 7/8"	
051144-13937-8	24			
051144-13936-1	36			
051144-13934-7	50			
051144-13933-0	60			
051144-13932-3	80			
051144-80656-0	P100			
051144-80657-7	P120	6,600	9-1/8" x 7/8"	
051144-13943-9	24			
051144-13942-2	36			
051144-13940-8	50			
051144-13938-5	80			

† Made-to-Order

\* Quick Change Tinneman Nut Attachment

### Tech Tip


#### Weld Blending Mild Steel

**Step 1** – Fibre Disc 988C Grade 36

**Step 2** – Scotch-Brite™ Light Grinding and Blending Disc SD on black ribbed pad

**Step 3** – 3 mil Paint Results:

- Productivity increase
- Abrasive cost improvement

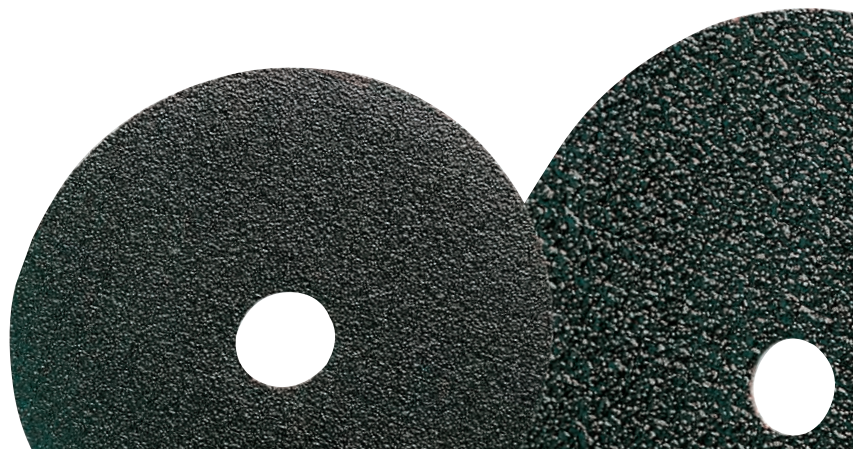

See pages 67–72 for available accessories.

### 3M™ Fibre Discs (cont.)

**NEW!** 3M™ Cubitron™ II Fibre Disc 982C

- 3M precision-shaped ceramic grain, engineered with ultra-sharp, fast-cutting points
- Wear evenly, run cool and optimize mineral breakdown to maximize disc life
- Grinding Applications: Weld edge and flat, flame cut, weld prep flat, weld removal, edge work for heavy stock removal



606708

UPC	Grade	Max. RPM	Dia. x Ctr. Hole	Min./Case
051141-27425-6	36+	13,300	4-1/2" x 5/8-11*	25/100
051141-27400-3			4-1/2" x 7/8"	
051141-27404-1	12,000	12,000	5" x 5/8-11*	
051141-27406-5			5" x 7/8"	
051141-27401-0			7" x 5/8-11*	
051141-27405-8	8,600	8,600	7" x 7/8"	
051141-27407-2			7" x 7/8"	
051141-27402-7			9-1/8" x 7/8"	
051141-27403-4	6,600	6,600	9-1/8" x 7/8"	

\* Quick Change Tinneman Nut Attachment

### 3M™ Fibre Discs 985C

- 3M™ Ceramic abrasive grain
- 3M's best choice for a long-lasting, premium disc for stainless steel
- Includes a grinding aid for cooler running



157186

UPC	Grade	Max. RPM	Dia. x Ctr. Hole	Min./Case
051111-55767-9	36	12,000	5" x 7/8"	25/100
051111-55780-8	50			
051111-55776-1	60			
051111-55779-2	80			
051111-55971-0	24	8,600	7" x 7/8"	
051111-55972-7	36			
051111-55973-4	50			
051111-55974-1	60			
051111-55975-8	80			

### 3M™ Fibre Discs 988C

- 3M™ Ceramic abrasive grain
- 3M's best premium disc for long-lasting performance for mild steel grinding



157187

UPC	Grade	Max. RPM	Dia. x Ctr. Hole	Min./Case
051111-55712-9	36	13,300	4-1/2" x 5/8-11*	25/100
051141-27341-9†	36	12,000	5" x 5/8-11*	100
051111-55746-4	24	12,000	5" x 7/8"	25/100
051111-55743-3	36			
051111-55742-6	50			
051111-60319-2	60			
051111-55740-2	80	8,600	7" x 5/8-11*	
051111-55840-9	24			
051111-55715-0	36			
051111-55964-2	24			
051111-55965-9	36	8,600	7" x 7/8"	
051111-55966-6	40			
051111-55967-3	50			
051111-55739-6	60			
051111-55968-0	80	6,600	9-1/8" x 7/8"	25/100
051111-60314-7	24			
051111-55744-0	24			
051111-55735-8	36			
051111-55733-4	50			

† Made-to-Order

\* Quick Change Tinneman Nut Attachment

### Tech Tip

Use 3M Red Ribbed Pads to optimize product life of 900 series discs—grades 24 and 36.

See pages 67–72 for available accessories.



360842


## 3M™ Flap Disc Selection Guide

Select Flap Discs for extended life and single-step grinding/blending.


		Product ID	Mineral	4-1/2" x 7/8"		4-1/2" x 5/8-11		7" x 7/8"		7" x 5/8-11	
				T27	T29	T27	T29	T27	T29	T27	T29
				All Metals							
Good	546D	Alumina Zirconia	●	●	●	●	●	●	●	●	●
Better	747D	Ceramic Aluminum Oxide Blend	●		●		●				
Best	947D	Ceramic Abrasive Grain	●	●	●		●	●	●		

## 3M™ Flap Discs

3M™ Flap Discs offer an unbeatable system for grinding and blending in one easy step. The construction wears away, exposing fresh mineral to extend disc life and provide consistent cut rates. Great for weld grinding, blending, deburring, rust removal, surface prep and edge grinding. Available in both T29 or T27 constructions with or without the 5/8-11 hub.




See pages 67–72 for available accessories.

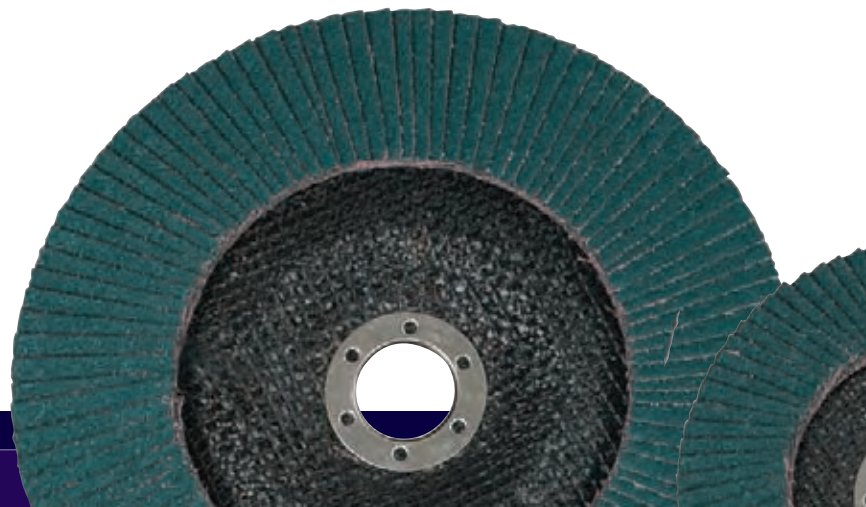

### 3M™ Flap Discs (cont.)

#### 3M™ Flap Discs 546D

- Versatile Alumina Zirconia mineral works on a variety of metals and applications
- Excellent choice for grinding and blending in one step
- Reduce your cost per grind and overall abrasive spend



UPC	Grade	Max. RPM	Dia. x Ctr. Hole	Qty./Case		
<b>Type 29</b>						
051115-28874-6†	24	13,300	4-1/2" x 7/8"	10		
051115-28875-3†	36					
051115-28876-0	40					
051115-28877-7	60					
051115-28878-4	80					
051115-28879-1†	120					
051115-28868-5†	24				4-1/2" x 5/8-11*	
051115-28869-2†	36					
051115-28870-8	40					
051115-28871-5	60					
051115-28872-2	80					
051115-28873-9†	120					
051115-28926-2†	24		8,600			7" x 7/8"
051115-28927-9†	36					
051115-28928-6	40					
051115-28929-3	60					
051115-28930-9	80					
051115-28931-6†	120					
051115-28920-0†	24	7" x 5/8-11*				
051115-28921-7†	36					
051115-28922-4	40					
051115-28923-1	60					
051115-28924-8	80					
051115-28925-5†	120					

† Made-to-Order  
\* Quick Change Hub Attachment

#### 3M™ Flap Discs 546D (cont.)

UPC	Grade	Max. RPM	Dia. x Ctr. Hole	Qty./Case
<b>Type 27</b>				
051141-30598-1†	36	13,300	4-1/2" x 7/8"	10
051141-30599-8	40			
051141-30600-1	60			
051141-30601-8	80			
051141-30602-5†	120			
051141-30593-6†	36		4-1/2" x 5/8-11*	
051141-30594-3	40			
051141-30595-0	60			
051141-30596-7	80			
051141-30597-4†	120			
051141-30603-2†	36	8,600	7" x 7/8"	5
051141-30604-9	40			
051141-30605-6	60			
051141-30606-3	80			
051115-28917-0†	120			
051141-30607-0†	36		7" x 5/8-11*	
051141-30608-7	40			
051141-30609-4	60			
051141-30610-0	80			
051115-28919-4†	120			

† Made-to-Order  
\* Quick Change Hub Attachment

#### Tech Tip

Flap discs typically provide a finish one grade finer than they are graded.

See pages 67–72 for available accessories.



### 3M™ Flap Discs (cont.)

#### 3M™ Flap Discs 747D

- Type 27
- 3M™ Ceramic Aluminum Oxide blend abrasive grain provides extended cut and life on hard metals



84696

UPC	Grade	Max. RPM	Dia. x Ctr. Hole	Qty./Case
051111-49613-8	36	13,300	4-1/2" x 7/8"	10
051111-49614-5	50			
051111-49615-2	60			
051111-49616-9	80			
051111-49617-6	P120			
051111-55805-8	36		4-1/2" x 5/8-11*	
051111-61057-2†	50			
051111-61058-9†	60			
051111-61059-6†	80			
051111-61060-2†	P120			
051111-49608-4	36	8,600	7" x 7/8"	5
051111-49609-1	50			
051111-49610-7	60			
051111-49611-4	80			
051111-49612-1†	120			

† Made-to-Order

\* Quick Change Tinneman Nut Attachment

#### 3M™ Flap Discs 947D


- Type 27
- Excellent option for stainless steel finishing
- 3M™ Ceramic abrasive grain for exceptional cut and life on hard metals



360834

UPC	Grade	Max. RPM	Dia. x Ctr. Hole	Qty./Case
051111-61187-6	40	13,300	4-1/2" x 7/8"	10
051111-61188-3	60			
051111-61189-0	80			
051111-61190-6	120			
051111-61191-3	40			
051111-61192-0	60		4-1/2" x 5/8-11*	
051111-61193-7	80			
051111-61194-4	120			
051111-61195-1	40			
051111-61196-8	60			
051111-61197-5	80			
051111-61198-2	120			
051111-61199-9	40			
051111-61200-2	60			
051111-61201-9	80	7" x 5/8-11*		

\* Quick Change Hub Attachment

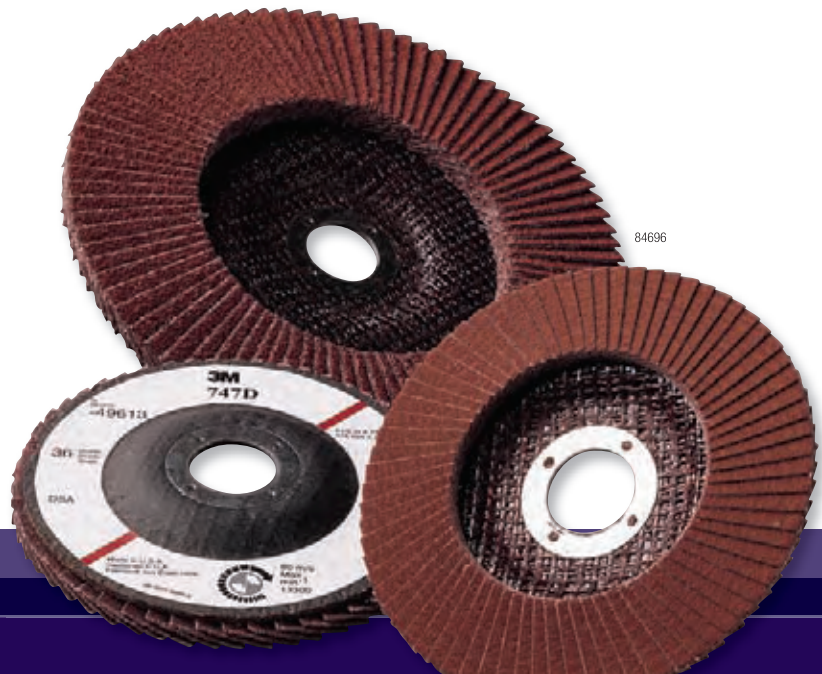

84696

See pages 67–72 for available accessories.

## 3M™ Stikit™ and PSA Disc Selection Guide

	3M ID	Anti-Loading	Backing	Application		Metal Type					
				Blending	Finishing	Stainless Steel	Aluminum	Carbon Steel	Titanium	Nickel Alloy	Non-Ferrous (Brass/Bronze)
<b>Good</b>	214U	Yes	A wt. Paper		●		●	●			
	341D	—	X wt. Cloth	●	●		●	●			●
<b>Better</b>	236U	Yes	C wt. Paper	●	●		●	●			
	415U	Yes	A wt. Paper		●		●	●			
	363I	—	F wt. Paper	●	●		●	●			
	202DZ	—	J wt. Cloth	●	●		●				●
	348D	—	X wt. Cloth	●			●	●			
<b>Best</b>	735U	Yes	C wt. Paper	●	●		●	●			
	763U	—	F wt. Paper	●	●	●	●	●			
	777F	—	Y wt. Cloth	●	●	●		●	●	●	
	900DZ	—	J wt. Cloth	●	●		●				

### 3M™ Stikit™ Discs



#### 3M™ Stikit™ Disc 202DZ

- Aluminum Oxide on a durable J wt. cloth backing
- Excellent for use on aluminum and brass
- Open coat resists loading
- Individual discs with liners



148265

#### 3M™ Stikit™ White Gold Disc Roll 214U

- Aluminum Oxide on an A wt. paper backing
- Discs for paint, primer, metal, wood and fiberglass
- Special 3M coating resists loading



13270

UPC	Grade	Diameter	Min./Case
<b>Paper Backing</b>			
051111-50450-5	80	5"	50/250
051111-50451-2	P100		
051111-50452-9	P120		
051111-50453-6	P150		
051111-50454-3	P180		
051111-50455-0	P220		
051111-50459-8	80		
051111-50460-4	P100	6"	
051111-50461-1	P120		
051111-50462-8	P150		
051111-50463-5†	P180		
051111-50464-2	P220		

† Made-to-Order

UPC	Grade	Diameter	Discs/Roll	Qty./Case
<b>Paper Backing</b>				
051144-81802-0	P80	5"	125	10
051144-81803-7	P100			
051144-81804-4	P120			
051144-81806-8	P150		175	6
051144-81808-2	P180			
051144-81810-5	P220			
051144-81812-9	P240			
051144-81997-3	P320	6"	125	10
051144-81996-6	P400			
051144-86381-5	P80			
051144-86389-1	P100			
051144-86382-2	P120			
051144-86383-9	P150		175	6
051144-86384-6	P180			
051144-86385-3	P220			
051144-86387-7	P320			

**ATTENTION: See backup pad maximum operating speed for the appropriate operating speed for the 3M™ Stikit™ and PSA Discs.**

See pages 67–72 for available accessories.

### 3M™ Stikit™ Discs (cont.)

#### 3M™ Stikit™ Disc Roll 236U

- Aluminum Oxide on a C wt. paper backing
- Discs for paint, primer, wood, metal, plastic and fiberglass
- Strong paper backing provides durability and increased cut rate
- Open coat minimizes loading
- Load resistant coating



209045



487530

UPC	Grade	Diameter	Discs/Roll	Qty./Case
<b>Paper Backing</b>				
051144-86488-1	P80	5"	100	4
051144-86489-8	P100			
051144-86490-4	P120			
051144-86491-1	P150			
051144-86492-8	P180			
051144-86493-5	P220			
051144-86494-2	P240			
051144-86495-9	P320			
051144-86496-6	P400			
051144-86497-3	P500			
051144-86468-3	P80	6"	100	4
051144-86469-0	P100			
051144-86470-6	P120			
051144-86471-3	P150			
051144-86472-0	P180			
051144-86473-7	P220			
051144-86474-4	P240			
051144-86475-1	P320			
051144-86476-8	P400			
051144-86477-5	P500			

#### 3M™ Stikit™ Disc Roll 363I

- Aluminum Oxide on an extra heavy F wt. paper backing
- Resin bonded for heat resistance



105480

UPC	Grade	Diameter	Discs/Roll	Qty./Case
<b>Paper Backing</b>				
051144-21800-4	60	5" x NH	100	4
051144-21799-1	80			
051144-21798-4	P100			
051144-21797-7	P120			
051144-21796-0	P150			
051144-21795-3	P180	6" x NH	100	4
051144-21794-6	60			
051144-21793-9	80			
051144-21792-2	P100			
051144-21791-5	P120			
051144-21790-8	P150			
051144-21789-2	P180			



#### 3M™ Stikit™ Disc Roll 341D

- Aluminum Oxide on a durable X wt. cloth backing
- Resin bonded for heat resistance

UPC	Grade	Diameter	Discs/Roll	Qty./Case
<b>Paper Backing</b>				
051144-21752-6	50	5" X NH	100	4
051144-21751-9	60			
051144-21750-2	80			
051144-21749-6	P100			
051144-21748-9	P120			
051144-21746-5	P180			
051144-21762-5	60	6" X NH	100	4
051144-21761-8	80			



#### 3M™ Stikit™ Disc Roll 415U

- Silicon Carbide abrasive on a flexible A-wt. paper backing
- Features a load resistant coating
- Delivers good cut and excellent finish

UPC	Grade	Diameter	Discs/Roll	Qty./Case
051144-77223-0	80	5" x NH	125	8
051144-77224-7				
051144-77227-8				
051144-77228-5	100		250	4
051144-77230-8				
051144-77231-5	120		250	4
051144-77234-6				
051144-77235-3	150	250	4	
051144-77237-7				
051144-77238-4	180	250	4	
051144-77241-4				
051144-77242-1	220	250	4	

See pages 67–72 for available accessories.

### 3M™ Stikit™ Discs (cont.)

#### 3M™ Stikit™ Disc/Disc Roll 735U



- 3M™ Ceramic Aluminum Oxide blend abrasive grain on a C wt. Paper
- Load-resistant coating
- Sharp-cutting and durable
- Ideal for wood, soft metals, fiberglass and solid surface

UPC	Grade	Diameter	Discs/Roll	Qty./Case
<b>Disc Rolls SI</b>				
051111-51229-6	P80	5" x NH	100	4
051111-51230-2	P100			
051111-51231-9	P120			
051111-51232-6	P150			
051111-51233-3	P180			
051111-51234-0	P220			
<b>Paper Backing with Tab Liner</b>				
051141-20760-5	P80	5" x NH	50	5
051141-20762-9	P100			
051141-20764-3	P120			
051141-20766-7	P150			
051141-20768-1	P180			
051141-20770-4	P220	6" x NH	50	5
051141-24042-8	P80			
051141-24043-5	P100			
051141-24044-2	P120			
051141-24045-9	P150			
051141-24046-6	P180			
051141-24047-3	P220			

#### 3M™ Stikit™ Disc Roll 763U

- 3M™ Ceramic Aluminum Oxide blend abrasive grain on a heavy F wt. paper backing

UPC	Grade	Diameter	Discs/Roll	Qty./Case
<b>Paper Backing</b>				
051144-80942-4	60	5" x NH	100	4
051144-80943-1	80			
051144-80944-8	P100			
051144-80945-5	P120	6" x NH	100	4
051144-80946-2	60			
051144-80947-9	80			

#### 3M™ Stikit™ Disc 900DZ



- High performance 3M™ Ceramic abrasive grain on a J-wt backing
- Open coat to reduce loading
- Individual discs with liner

UPC	Grade	Diameter	Min./Case
<b>Paper Backing</b>			
051111-49639-8	80	5" x NH	50/250
051111-49640-4	P100		
051111-49641-1	P120		
051111-49643-5	P150		
051111-49642-8	P180		
051111-49644-2	P220		

### Tech Tip

#### 3M™ Disc Finish and Life (comparing grade 180)

Get the most out of your 900DZ disc by pairing it with our 2-Handed 3M™ Random Orbital Sander (PN28337)



Best Finish (fewest swirl marks)	Longest Life (related to mineral dulling)
415U	900DZ
214U	777F
236U	341D
363I	202DZ
735U	763U
763U	735U
202DZ	363I
341D	236U
900DZ	214U
	415U
Coarsest Finish	Least Life

**ATTENTION:** See backup pad maximum operating speed for the appropriate operating speed for the 3M™ Stikit™ and PSA Discs.

See pages 67–72 for available accessories.

**NEW!** 3M™ PSA Discs

**3M™ PSA Cloth Disc 348D**

- Aluminum Oxide on an X wt. cloth backing
- Heavy-duty, cloth-backed discs for more aggressive applications
- Provides excellent adhesion while removing easily

UPC	Grade	Diameter	Min./Case	
<b>Cloth Backing</b>				
051144-20913-2	36	2"	50/200	
051144-20911-8	50			
051144-20910-1	60			
051144-20909-5	80			
051144-20908-8	P100			
051144-20907-1	P120			
051144-01335-7	40	3"		
051144-01334-0	50			
051144-01333-3	60			
051144-01332-6	80			
051144-01331-9	P100			
051144-01330-2	P120			
051144-20891-3	36	5"	50/250	
051144-20890-6	40			
051144-20889-0	50			
051144-20888-3	60			
051144-20887-6	80			
051144-20886-9	P100			
051144-20885-2	P120			
051144-20884-5	P150			
051144-20883-8	P180			
051144-20881-4	P240			
051144-21639-0	36			6"
051144-21731-1	40			
051144-20879-1	50			
051144-20878-4	60			
051144-20877-7	80			
051144-20876-0	P100			
051144-21497-6	P120	8"		
051144-20874-6	36			
051144-20873-9	40			
051144-20871-5	60			
051144-20870-8	80			
051144-20868-5	P120			
051144-88906-8	36	12"		10
051144-88905-1	40			
051144-88904-4	50			
051144-88903-7	60			
051144-88902-0	80			
051144-88901-3	P100			



**3M™ PSA Cloth Disc 348D (cont.)**

UPC	Grade	Diameter	Min./Case
051144-88890-0	36	16"	10
051144-88889-4	40		
051144-88887-0	60		
051144-88886-3	80	18"	
051144-88882-5	36		
051144-88880-1	60		
051144-88878-8	36	20"	
051144-88877-1	40		
051144-88876-4	50		
051144-88875-7	60		
051144-88874-0	80	24"	
051144-20802-9	36		
051144-20801-2	40		
051144-20798-5	80		

**3M™ PSA Disc 777F**

- 3M™ Ceramic Aluminum Oxide blend abrasive grain on a polyester cloth backing
- Heavy-duty YF wt. backing provides great strength and flexibility
- Provides long life and fast cut on multiple surfaces
- Includes a grinding aid for cooler running

UPC	Grade	Diameter	Qty./Case
<b>Cloth Backing</b>			
051144-88869-6	36	12"	10
051144-88873-3	40		
051144-88872-6	50		
051144-88871-9	60		
051144-88870-2	80		

**ATTENTION:** See backup pad maximum operating speed for the appropriate operating speed for the 3M™ Stikit™ and PSA Discs.

See pages 67–72 for available accessories.

## 3M™ Roloc™ Cloth Disc Selection Guide

	Product ID	Mineral	Features	Metal Type	Grinding	Light Grinding	Blending	Deburring
Good	361F	Aluminum Oxide	General purpose grinding, light grinding, blending, and deburring on all metals	All Metals	●	●	●	●
	461F	Silicon Carbide	Ideal for grinding glass, titanium and non-ferrous metals	Titanium		●	●	●
Better	777F	Ceramic A/O* Blend	Durable Y-wt Cloth backing; Grinding aid	Stainless Steel, Nickel Alloy	●	●	●	●
Best	963G	Ceramic Abrasive Grain	Durable backing	Carbon Steel	●	●	●	●
	977F		Durable 2-ply backing; Grinding aid	Stainless Steel, Nickel Alloy	●	●	●	●

\*A/O – Aluminum Oxide

## 3M™ Roloc™ Fiber Disc Selection Guide





	Product ID	Mineral	Features	Metal Type	Grinding	Light Grinding	Blending	Deburring
Good	501C	Aluminum Zirconia	Versatile disc for use on a wide variety of metals; General purpose grinding, blending and finishing on all metals	All Metals	●	●		●
Better	785C	Ceramic A/O* Blend	Excellent for stainless steel; Grinding aid	Stainless Steel	●	●		●
Best	983C/ 988C	Ceramic Abrasive Grain	Fast cutting; Long life; Designed for a variety of carbon steel applications	Carbon Steel	●	●		●
	988R		Unique single-piece construction that can eliminate button delamination and enhance disc performance; Cut through metal stock to quickly level welds and take on tough jobs in small areas	Mild Steel	●	●		●





\*A/O – Aluminum Oxide

## Optimum Tool Speeds to Maximize 3M™ Roloc™ Disc Cut Rates and Life

Disc Size	Material Type			
	Stainless	Aluminum	Steel	Titanium
1-1/2"	20,000 RPM	30,000 RPM	30,000 RPM	9,000 RPM
2"	15,000 RPM	20,000 RPM	20,000 RPM	7,000 RPM
3"	10,000 RPM	15,000 RPM	15,000 RPM	4,500 RPM
4"	8,000 RPM	9,000 RPM	9,000 RPM	3,000 RPM

## 3M™ Roloc™ Attachment System Guide

Product ID	Attachment			
	TP 	TR 	TSM 	TS 
361F	●	●	●	
461F		●		
777F		●	●	●
963G		●		
977F		●		
501C		●	●	
785C		●		
983C/988C		●		
988R		●		











Diameter	Attachment			
	TP 	TR 	TSM 	TS 
3/4"	●	●		●
1"	●	●	●	●
1-1/2"	●	●	●	●
2"	●	●	●	●
3"	●	●	●	●
4"	●	●		●

See pages 67–72 for available accessories.

## 3M™ Roloc™ Discs

3M™ Roloc™ Discs provide a fast, efficient method for grinding, blending, leveling and finishing on all types of metal. They lock securely in place with just a half twist...another half twist and they're off. Each disc is color coded by grade. (This does not include 3M Roloc TSM or 988R products.)

### 3M™ Roloc™ Disc Button Color/Grade Chart


 24/Black	 80/Yellow	 180/Brown
 36/Brown	 100/Blue	 240/Green
 50/Green	 120/White	
 60/Orange	 150/Black	

 Mild Steel	 Stainless Steel
--	---

### 3M™ Roloc™ Disc 361F




- Aluminum Oxide on a YF wt. cloth backing
- General purpose grinding, blending and finishing on all metals



UPC	Grade	Max. RPM	Diameter	Min./Case
<b>Roloc TR (Plastic Button)</b> 				
051144-11412-2	36	30,000	1"	50/500
051144-11411-5	50			
051144-11417-7	60			
051144-11416-0	80			
051144-11415-3	P100			
051144-11414-6	P120			
051144-11452-8†	24	30,000	1-1/2"	
051144-22396-1	36			
051144-11137-4	50			
051144-22397-8	60			
051144-22407-4	80			
051144-22408-1	P100			
051144-22409-8	P120	25,000	2"	
051144-11000-1	24			
051144-22398-5	36			
051144-22399-2	50			
051144-22400-5	60			
051144-22401-2	80			
051144-22402-9	P100			
051144-22403-6	P120			
051144-14559-1	P150			
051144-13873-9	P180			
051144-11419-1	P240			

† Made-to-Order

### 3M™ Roloc™ Disc 361F (cont.)

UPC	Grade	Max. RPM	Diameter	Min./Case
<b>Roloc TR (Plastic Button)</b> 				
051144-22392-3	24	20,000	3"	50/200
051144-22393-0	36			
051144-22394-7	50			
051144-22395-4	60			
051144-22404-3	80			
051144-22405-0	P100			
051144-22406-7	P120	12,000	4"	25/100
051144-82244-7	P150			
051144-11418-4	P240			
051144-76429-7	36			
051144-11421-4	60			
051144-11420-7	80			
<b>Roloc TSM (Metal Button)</b> 				
051111-49932-0	36	30,000	1-1/2"	50/500
051111-49933-7	60			
051111-49934-4	80			
051111-51039-1	P100			
051111-51038-4†	P120	25,000	2"	50/200
051111-49936-8	36			
051111-49937-5	60			
051111-49938-2	80			
051111-51034-6	P100			
051111-49939-9	P120			
051111-51033-9	36	20,000	3"	
051111-49940-5	60			
051111-49941-2	80			
051111-49942-9	P100			
051111-49943-6	P120			
<b>Roloc TP (Metal Button)</b> 				
051111-82401-4	40	25,000	2"	50/200
051111-76806-6	60			
051111-76810-3	80			
051111-77115-8†	100			
051111-22393-0	36	20,000	3"	
051111-22394-7	50			
051111-22395-4	60			
051111-22404-3	80			
051111-22405-0	P100			

† Made-to-Order

See pages 67–72 for available accessories.


### 3M™ Roloc™ Discs (cont.)

#### 3M™ Roloc™ Disc 461F

- Silicon Carbide on a YF wt. cloth backing gives stainless steel a brighter finish
- Ideal for grinding glass, titanium and non-ferrous metals



51704

UPC	Grade	Max. RPM	Diameter	Min./Case
<b>Roloc TR (Plastic Button)</b> 				
051144-12956-0	P60	25,000	2"	50/200
051144-12954-6	P80			
051144-12957-7	P60	20,000	3"	
051144-12955-3	P80			





524509

#### 3M™ Roloc™ Fibre Disc 501C

- Aluminum Zirconia – Fibre
- Versatile disc for use on a wide variety of metals



159108


UPC	Grade	Max. RPM	Diameter	Min./Case
<b>Roloc TR (Plastic Button)</b> 				
051141-20645-5	36	25,000	2"	50/200
051111-50748-3	50			
051111-50749-0	60			
051111-50750-6	80			
051111-50743-8	36	20,000	3"	
051111-50744-5	50			
051111-50745-2	60			
<b>Roloc TSM (Metal Button)</b> 				
051111-50755-1	36	25,000	2"	50/200
051111-50756-8	50			
051111-50757-5	60			
051111-50758-2	80			
051111-50751-3	36	20,000	3"	
051111-50752-0	50			
051111-50753-7	60			
051111-50754-4	80			

#### 3M™ Roloc™ Disc 777F

- 3M™ Ceramic Aluminum Oxide blend abrasive grain
- Cloth backing for durability
- Grinding aid for cooler running



424847




UPC	Grade	Max. RPM	Diameter	Min./Case	
<b>Roloc TR (Plastic Button)</b> 					
051144-76622-2	36	30,000	1"	50/500	
051144-76623-9	50				
051144-76624-6	60				
051144-76625-3	80				
051144-80510-5	P120	25,000	2"		50/200
051144-76626-0	36				
051144-76627-7	50				
051144-76628-4	60				
051144-14660-4	80	20,000	3"		
051144-80511-2	P120				
051144-76629-1	36				
051144-76630-7	50				
051144-76433-4	60	25,000	2"	50/200	
051144-14661-1	80				
051144-80508-2	P100				
051144-80512-9	P120				
051144-76631-4	36	20,000	3"		
051144-76632-1	50				
051144-76633-8	60				
051144-76634-5	80				
051144-80509-9	P100	25,000	2"		50/200
051144-80513-6	P120				

See pages 67–72 for available accessories.



### 3M™ Roloc™ Discs (cont.)

#### 3M™ Roloc™ Disc 777F (cont.)


UPC	Grade	Max. RPM	Diameter	Min./Case
<b>Roloc TSM (Metal Button)</b> 				
051111-49949-8	36	25,000	2"	50/200
051111-50253-2	60			
051111-50254-9	80			
051111-50255-6	100			
051111-50256-3	P120			
051111-50257-0	36	20,000	3"	
<b>Roloc TP (Metal Button)</b> 				
051144-76770-0†	60	25,000	2"	50/200
051144-76743-4†	36	20,000	3"	
051144-76763-2†				
051144-76767-0†				
051144-76767-0†				
<b>Roloc TS (Plastic Button)</b> 				
051144-76742-7	36	25,000	2"	50/200
051144-76746-5	50			
051144-76750-2	60			
051144-76743-4†	36	20,000	3"	
051144-76747-2†	50			
051144-76751-9	60			
051144-76755-7	80			

† Made-to-Order

#### 3M™ Roloc™ Fibre Disc 785C ■


- 3M™ Ceramic Aluminum Oxide blend abrasive grain – Fibre
- An excellent starting point for stainless steel
- Includes a grinding aid for cooler running



UPC	Grade	Max. RPM	Diameter	Min./Case
<b>Roloc TR (Plastic Button)</b> 				
051144-85882-8†	24	20,000	3"	50/100
051144-85883-5	36			
051144-85884-2	50			
051144-85885-9	60			
051144-85886-6	80			
051144-85887-3	P100	12,000	4"	25/100
051144-85888-0	P120			
051144-83690-1	36			
051144-83691-8	50			
051144-83692-5	60			
051144-83693-2	80	P100		
051144-83694-9	P120			
051144-83695-6	P120			

† Made-to-Order

See pages 67–72 for available accessories.

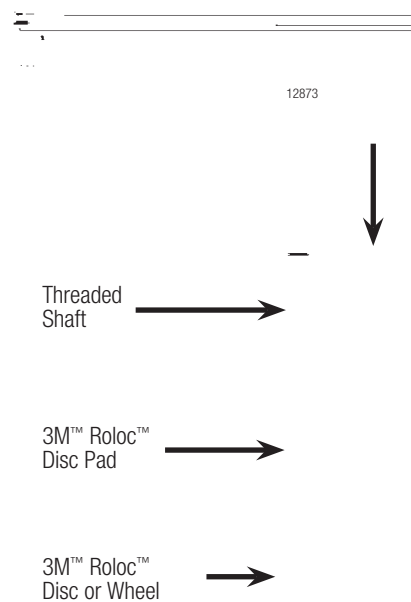


14494

### 3M™ Roloc™ Discs (cont.)

#### 3M™ Roloc™ Cloth Disc 963G ■

- 3M™ Ceramic abrasive grain
- Durable cloth backing





UPC	Grade	Max. RPM	Diameter	Min./Case	
<b>Roloc TR (Plastic Button)</b> 					
051144-11422-1†	50	30,000	1"	50/500	
051144-11428-3	60				
051144-11427-6	80				
051144-11425-2	120				
051144-11450-4	36		1-1/2"		
051144-11448-1	60				
051144-11455-9	80				
051144-11454-2†	100				
051144-11453-5	120	25,000	2"	50/200	
051144-11113-8	24				
051144-11112-1	36				
051144-76436-5	40				
051144-11111-4	50				
051144-11110-7	60				
051144-11109-1	80		20,000		3"
051144-11107-7	100				
051144-11106-0	120				
051144-11108-4	24				
051144-11105-3	36				
051144-11104-6	50				
051144-11103-9	60	25,000	2"	50/200	
051144-11102-2	80				
051144-11101-5	100				
051144-11100-8	120				

† Made-to-Order

#### **NEW!** 3M™ Roloc™ Durable Edge Disc 977F ■

- 3M™ Ceramic abrasive grain
- Features a durable backing and a grinding aid
- For grinding, blending and deburring of light to medium pressure applications for virtually all metal types



UPC	Grade	Max. RPM	Diameter	Min./Case
<b>Roloc TR (Plastic Button)</b> 				
051144-24094-7	36	25,000	2"	50/200
051144-24096-1	50			
051144-24098-5	60			
051144-24100-5	80	20,000	3"	
051144-24095-4	36			
051144-24097-8	50			
051144-24099-2	60			
051144-24102-9	80			
<b>Roloc TSM (Metal Button)</b> 				
051141-24005-3	36	30,000	1-1/2"	50/500
051141-27348-8†	36			50/200
051141-27393-8	50			
051141-27346-4†	60	25,000	2"	
051141-27347-1†	36			
051141-27392-1†	50			
051141-27345-7†	60			

† Made-to-Order

■ Mild Steel ■ Stainless Steel



See pages 67–72 for available accessories.

### 3M™ Roloc™ Discs (cont.)

#### 3M™ Roloc™ Disc 977F ■

- 3M™ Ceramic abrasive grain
- Features a grinding aid
- Excellent for stainless steel, titanium and high nickel alloys.




UPC	Grade	Max. RPM	Diameter	Min./Case
<b>Roloc TR (Plastic Button)</b> 				
051144-83587-4	36	25,000	2"	50/200
051144-83588-1	60			
051144-83589-8	80			
051144-83590-4†	36	20,000	3"	
051144-83591-1	60			
051144-83592-8	80			
<b>Roloc TSM (Metal Button)</b> 				
051141-24005-3	36	30,000	1-1/2"	50/500
051141-24006-0	60			
051141-24003-9	36	25,000	2"	50/200
051141-24004-6	60			

† Made-to-Order

#### 3M™ Roloc™ Fibre Disc 983C/988C ■

- 3M™ Ceramic abrasive grain content for fast cutting and long life
- Cloth backing for durability
- Designed for high-pressure weld leveling and deburring





UPC	Grade	Max. RPM	Diameter	Min./Case
<b>Roloc TR (Plastic Button)</b> 				
051144-22352-7	36	25,000	2" 983C	50/200
051111-50005-7	50			
051144-22353-4	60			
051144-22354-1	80			
051144-22349-7	36	20,000	3" 983C	
051144-85890-3	50			
051144-22350-3	60			
051144-22351-0	80	12,000	4" 988C	25/100
051111-55753-2	36			
051111-55754-9	50			
051111-55755-6	60			
051111-55756-3	80			

■ Mild Steel ■ Stainless Steel

#### 3M™ Roloc™ Discs 988R ■

- 3M™ Ceramic abrasive grain
- Cuts through metal stock to quickly level welds and take on tough jobs in small areas
- A unique single-piece construction that can eliminate button delamination and enhance disc performance



UPC	Grade	Max. RPM	Diameter	Min./Case
<b>Roloc TR (Plastic Button)</b> 				
051141-20626-4	24	25,000	2"	50/200
051141-20627-1	36			
051141-20628-8	50			
051141-20629-5	60			
051141-20630-1	80	20,000	3"	
051141-20024-8	24			
051141-20025-5	36			
051141-20026-2	50			
051141-20030-9	60			
051141-20027-9	80			

See pages 67–72 for available accessories.

## 3M™ Belts

3M is the one-stop shop for all of your coated abrasive metalworking belt needs! We offer a product tailored to nearly every application and performance level. To select the best product for your application, check out our easy-to-use Belt Selection Guide. Each tier of product offers best-in-class performance at various price points. Once you have selected the product, use the Availability Guide to select your grade. The following section includes our most popular belt items, but remember, we can provide any size belt that you might need!

## Abrasive Speed Recommendations for Off-Hand Applications

Alloy	Belt Speed (surface feet per minute)	Applicable Belt Grades
Cast Iron	7,000	24–120
Carbon Steel	6,500	24–120
Stainless Steel	6,500–7,000	36–120
Nickel Alloys	6,000	36–120
Titanium	2,500–3,000	36–180
Aluminum	7,500–8,500	24–120
	6,500–7,000	Fine Grades
Brass	7,000–8,000	36–180
Rubber	4,500	36–180
Glass	2,500–5,000	80–400
	6,000–8,000	
Stone	7,000	36–180

## 3M Precision Shaped Grain



Conventional Grain



Precision-Shaped Grain

Triangular-shaped grain (right) is electrostatically oriented to form sharp peaks, each acting like individual cutting tools that wear evenly for super long life and consistency.



Conventional Ceramic





3M™ Cubitron™ II

3M precision shaped grain sharpens as it wears compared to conventional ceramic abrasive grain so 3M™ Cubitron™ II abrasive belts last longer!

### Tech Tip

**Resin** — Choose a product with a grinding aid when working on heat sensitive alloys like stainless steel, nickel alloys and cobalt alloys.




## How to Use the Coated Belt Selection Guide (page 20)

1. Find the machine type that you will run this belt on.
2. Move down to the metal type that is being worked on.
3. Select the product from the list of **Good – Better – Best** finishing belts.
4. Check the Availability Guide for the grade.
5. Turn to the page listed for this product to find the size.
6. If your size is not listed, contact your 3M distributor or 3M rep for ordering instructions.

**Note:** The selection guide on the following page applies to 3M belt products made with conventional abrasive grain. For the ultimate in performance for coarse grade grinding in any application, be sure to try the latest innovation: 3M™ Cubitron™ II Metalworking Belts.

Cumulative Cut, SS304: Typical End Point

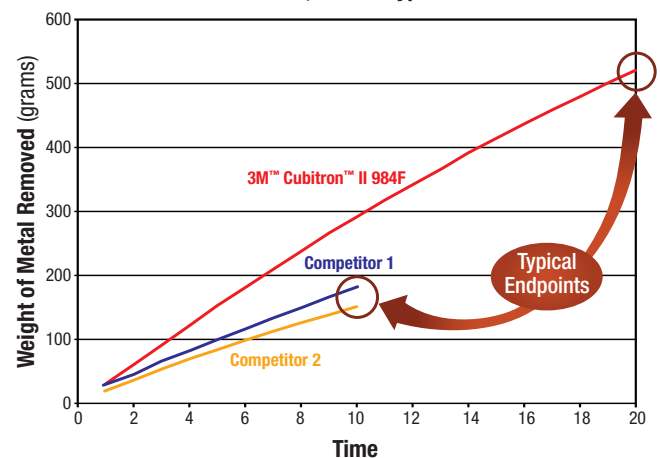

See pages 67–72 for available accessories.

### 3M™ Coated Belt Selection Guide



		Portable/ File Tool	Coarse Grade Power Grinding/ High Pressure	Slack of Belt Sander	Stroke Sander	Bench Top Belt Machine	Backstand/ Off Hand	Centerless & Roll Grinding		Flat Finishing	
								Dry	Wet	Dry	Wet
Carbon Steel	Good	241E	577F	341D	—	341D	341D	—	—	341D	361F
	Better	577F	963G	577F	—	577F	577F	577F	577F	577F	577F
	Best	777F	966F	—	—	977F	977F	966F	966F	966F	966F
	Finishing Belt	N/A	N/A	341D/ Trizact*	—	341D/ Trizact*	3XXD**/ Trizact*	777F/ Trizact*	Trizact*	461F	461F
Stainless Steel	Good	—	—	577F	341D	577F	577F	—	—	341D	361F
	Better	577F	577F	777F	—	777F	777F	577F	577F	577F	577F
	Best	777F	977F	—	747D	977F	977F	977F	966F	977F	977F
	Finishing Belt	N/A	N/A	Trizact*	—	Trizact*	3XXD**/ Trizact*	777F/ Trizact*	Trizact*	461F/ Trizact*	461F/ Trizact*
Aluminum, Brass, Bronze	Good	241E	577F	—	—	—	—	—	—	341D	361F
	Better	577F	963G	577F	—	577F	577F	577F	577F	577F	577F
	Best	777F	966F	—	—	—	—	—	—	—	—
	Finishing Belt	N/A	N/A	341D/ Trizact*	—	341D/ Trizact*	3XXD**/ Trizact*	341D/ Trizact*	461F	461F	461F
Cobalt and Nickel Alloys	Good	—	—	577F	—	577F	577F	—	—	577F	577F
	Better	577F	577F	777F	—	777F	777F	577F	577F	777F	777F
	Best	777F	977F	—	—	977F	977F	977F	966F	977F	966F
	Finishing Belt	N/A	N/A	Trizact*	—	Trizact*	3XXD**/ Trizact*	777F/ Trizact*	Trizact*	461F	461F
Titanium	Good	—	—	461F	—	461F	461F	—	—	N/A	461F
	Better	577F	577F	577F	—	577F	577F	—	577F	N/A	577F
	Best	777F	966F	—	—	966F	966F	—	966F	N/A	966F
	Finishing Belt	N/A	N/A	461F/ Trizact*	—	461F/ Trizact*	3XXD**/ Trizact*	—	Trizact*	N/A	461F

\*For specific Trizact product recommendations, see page 21.

\*\*3XXD: Choose from 302D, 332D and 341D depending upon backing flexibility needed for application.




### Availability Guide

3M ID	Pg #	Mineral	Backing	Grinding Aid	Use Dry/Wet	600	500	400	320	240	220	180	150	120	100	80	60	50	40	36	24	
241E	22	Aluminum Oxide	XE		Dry				P		P	P	P	P	P	●						
302D	22		J		Dry	P	P	P	P	P	P	P	P	P	P	●	●					
332D	22		Flex X		Dry			P	P	P	P	P	P	P	P	P	●	●				
341D	23		X		Dry			P	P	P	P	P	P	P	P	P	●	●	●	●	●	●
361F	24		XF		Dry/Wet			P	P	P	P	P	P	P	P	P	●	●	●	●	●	●
461F	24	Silicon Carbide	XF		Dry/Wet	P		P	P	P	P	P	P	P	P	P	P		P	P		
577F	24-25	Alumina Zirconia	YF	Yes	Dry/Wet							●	●	●	●	●	●	●	●	●	●	
747D	25	Ceramic A/O* Blend	X	Yes	Dry								P	P	P	●	●	●		●		
777F	26-27		YF	Yes	Dry/Wet							P	P	P	P	●	●	●	●	●	●	
963G	27	Ceramic	YN		Dry/Wet									●	●	●	●	●	●	●	●	
966F	27		YF		Dry/Wet										●	●	●	●	●	●	●	
977F	28		YF	Yes	Dry/Wet										●	●	●	●	●	●	●	●
984F	29	Precision Shaped Ceramic	YF	Yes	Dry/Wet															●		

See pages 67–72 for available accessories.

\*A/O – Aluminum Oxide

### 3M™ Trizact™ Belt Selection Guide



	Portable Tools	Centerless/Roll Grinder/ Tool Post (Dry)		Stroke/ Platen Sander	Backstand, Robotic		Flat Finisher	
		Dry	Wet		Med. Pressure	Lt. Pressure	Dry	Wet
Mild Steel, Stainless, Nickel, Cobalt Alloys	307EA	237AA	347FC	237AA	237AA	217EA	237AA	253FA
	237AA	327DC	363FC/463FC	347FC	307EA	237AA	347FC	363FC
	347FC	347FC	463FC/953FA	—	337DC	327DC	—	463FC
Aluminum, Brass, Copper	217EA	237AA	347FC	—	237AA	217EA	237AA	253FA
	237AA	327DC	363FC/463FC	237AA	307EA	237AA	347FC	363FC/463FC
	347FC	347FC	—	347FC	337DC	327DC	—	—
Titanium	237AA, 347FC, 407EA	407EA, 347FC	363FC/463FC	407EA	237AA, 337DC, 407EA	217EA, 327DC, 407EA	237AA	363FC/463FC
Chrome	347FC	327DC	347FC	—	—	—	—	—
	—	—	363FC/463FC	—	—	—	—	—
	—	—	953FA	—	—	—	—	—

### Availability Guide

3M ID	Mineral	Backing	Description	Use Dry/Wet	A Grade																	
					300	160	110	100	90	80	65	60	45	35	30	20	16	10	6	5	3	
217EA	Aluminum Oxide	Flex. J wt	Low Pressure	Dry				●		●	●		●		●		●		●			
237AA	Aluminum Oxide	Semi Flex. X wt	Low-Med Pressure	Dry		●		●		●	●		●		●		●		●		●	
253FA	Aluminum Oxide	Stiff X wt	Low-Med Pressure	Wet				●		●	●		●		●		●		●		●	
305EA	Aluminum Oxide	Flex. J wt	Fine Finishing	Dry																	●	●
307EA	Aluminum Oxide	Flex. J wt	Low-Med Pressure	Dry				●		●	●		●		●		●		●		●	
Trizact™ CF 327DC	Aluminum Oxide	Semi Flex. X wt	Low Pressure	Dry	●	●		●		●	●		●		●							
Trizact™ CF 337DC	Aluminum Oxide	Semi Flex. X wt	Med Pressure	Dry	●	●		●		●	●		●		●							
Trizact™ CF 347FC	Aluminum Oxide	Semi Flex. X wt	High Pressure	Wet/Dry	●	●		●		●	●		●		●							
363FC	Aluminum Oxide	Stiff YF wt	Med-High Pressure	Wet	●	●		●		●	●		●		●							
407EA	Silicon Carbide	Flex. J wt	Low-Med Pressure	Dry			●		●			●				●						
463FC	Silicon Carbide	Stiff YF wt	Med-High Pressure	Wet									●		●		●		●		●	
953FA	Ceramic	Stiff YF wt	Med-High Pressure	Wet	●	●		●		●	●		●		●		●		●		●	

**ATTENTION:** Belts are available in other grades and sizes. If you need a specific belt not listed, contact your 3M Sales Specialist or 3M Authorized Distributor.

See pages 67–72 for available accessories.

### 3M™ Belts

#### 241E

- Aluminum Oxide on an XE wt. cloth backing
- High strength backing for tougher applications



51721

UPC	Grade	W x L	Min./Case
<b>Portable Tool</b>			
051144-26733-0	60	1/4" x 24"	50/200
051144-26732-3	80		
051144-26731-6	120		
051144-31170-5	60	1/2" x 12"	
051144-26894-8†	80		
051144-26892-4†	120		
051144-72227-3†	60	1/2" x 18"	
051144-72228-0	80		
051144-72229-7†	120		
051144-26725-5†	50	1/2" x 24"	
051144-26723-1	60		
051144-26720-0	80		
051144-26719-4	100		
051144-26717-0†	120		
051144-26715-6	180		
051144-26714-9	220		
051144-14756-4	60	3/4" x 18"	
051144-14519-5	80		
051144-14667-3	120		

† Made-to-Order

#### 302D

- Aluminum Oxide mineral
- Flexible belt for blending and finishing contoured and complex parts
- Works great on most metals
- Grades 60, 80, P100–P600



Available in any size up to 52" wide. Please contact your 3M Sales Specialist or Authorized Distributor to order. Stock sizes will be added to the catalog in the near future.

#### 332D

- Aluminum Oxide mineral
- Semi-flexible X wt. backing provides good durability when working on contoured parts
- Works great on most metals
- Grades 60, 80, P100–P400




Available in any size up to 52" wide. Please contact your 3M Sales Specialist or Authorized Distributor to order. Stock sizes will be added to the catalog in the near future.

### Tech Tip

#### 3XXD


Choose from 302D, 332D and 341D depending upon backing flexibility needed for application as illustrated below:

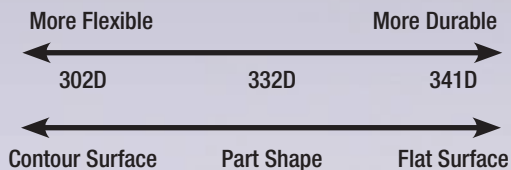

See pages 67–72 for available accessories.

### 3M™ Belts (cont.)

**NEW!**



**341D**

- Aluminum Oxide on an X wt. cloth backing
- Excellent all-around abrasive belt for blending and finishing



51724

UPC	Grade	W x L	Min./Case
<b>Backstand, Benchtop, Portable Tool</b>			
051144-26614-2	36	1" x 42"	50/200
051144-31823-0	50		
891040-01450-7	60		25/100
891040-01451-4	80		
891040-01452-1	P100		
891040-01453-8	P120		
051144-26602-9	P150		50/200
051144-26601-2	P180		
051144-26599-2	P240		
051144-26597-8	P320		
051144-26443-8	36	1-1/2" x 60"	10/50
051144-26441-4	40		25/50
051144-26438-4	60		
051144-26436-0	80	2" x 48"	10/50
051144-26571-8	36		
051144-26568-8	50		
051144-26564-0	60		25/50
051144-26562-6	80		
051144-26561-9	P100		
051144-26560-2	P120		
051144-26424-7	50	2" x 60"	10/50
051144-33640-1	60		25/50
051144-33639-5	80		
051144-33667-8	P120		
051144-26320-2	36	2" x 72"	10/50
051144-26316-5	60		25/50
051144-33067-6	80		
051144-26312-7	P120		
051144-26309-7	P180		
051144-81752-8	P240		

### 341D (cont.)

UPC	Grade	W x L	Min./Case
<b>Backstand, Benchtop, Portable Tool</b>			
051144-26408-7	36	2-1/2" x 60"	10/50
051144-26400-1	60		25/50
051144-26396-7	80		
051144-26388-2	P120	3-1/2" x 15-1/2"	10/50
051144-26857-3	60		
051144-26856-6	80		
891040-02663-0	P120	4" x 24"	25
891040-01436-1	36		50
891040-01439-2	60		
891040-01440-8	80	4" x 132"	25
051144-33647-0	60		
891040-01454-5	36	6" x 48"	10/20
891040-01455-2	40		
891040-01456-9	50		
891040-01457-6	60		
891040-10454-3	80		
891040-10455-0	P100		20
891040-10456-7	P120		
051144-26517-6	P150		
051144-26515-2	P180		
051144-26513-8	P240		
051144-74271-4	P120	37" x 60"	5
051144-14420-4	80	37" x 75"	3
051144-33061-4	P120		5
051144-14508-9	P180		

**ATTENTION: Belts are available in other grades and sizes. If you need a specific belt not listed, contact your 3M Sales Specialist or 3M Authorized Distributor.**

See pages 67–72 for available accessories.



### 3M™ Belts (cont.)

#### 361F

- Aluminum Oxide on an XF wt. backing
- Durable belt with a tough polyester backing that can be used wet or dry
- Ideal use in the grinding of sheets and coils, centerless and hand tool applications



UPC	Grade	W x L	Min./Case
<b>Backstand, Benchtop, Portable Tool</b>			
051111-67159-7†	P180	4" x 90"	50
051111-67179-5†	P320		
051111-68840-3†	P150	8" x 135"	20
051111-68841-0†	P180		
051111-51215-9	P180	37" x 75"	5
051111-68847-2†	80	52" x 75"	
051111-69422-0†	P400		
051119-84596-9†	60	6" x 90"	20
051115-27707-8†	P220	6" x 90"	
051125-09948-6†	P320	8" x 135"	
051144-14773-1	80	37" x 60"	2
051144-14905-6	P100		5
051144-11519-8	P120		
051144-76939-1	P150		
051144-11515-0	P180		
051144-76923-0	P220		
051144-81215-8	P100	37" x 75"	5
051144-76942-1†	P120		
051144-80037-7	P150		

† Made-to-Order

#### 461F

- Silicon Carbide mineral
- Durable cloth-backed belts
- For heavy duty grinding to fine finishing
- Resistant to tearing and will not easily nick



UPC	Grade	W x L	Min./Case
<b>Backstand, Benchtop, Portable Tool</b>			
051111-67404-8†	P220	4" x 118"	50
051111-67405-5†		4" x 132"	
051111-67408-6†	P320		
051125-23665-2†	P400	4" x 64"	50
051125-67387-4	P100	4" x 106"	5/5
051144-04337-8	P80	4" x 106"	
051144-04335-4†	P120		

† Made-to-Order

#### 577F

- Alumina Zirconia on a YF wt. cloth backing
- Resin bonded for heat resistance
- Features a grinding aid for cooler grinding
- Can be run wet or dry



UPC	Grade	W x L	Qty./Case
051141-30690-2	60	1/4" x 18"	200
051141-30691-9	80		
051141-30708-4	120		
051141-30694-0	60	1/4" x 24"	
051119-05580-1	80		
051141-30695-7	120	1/2" x 12"	
051111-68668-3	60		
051111-68695-9	80		
051141-30709-1	120	1/2" x 18"	
051141-30686-5	36		
051119-63081-7	60		
051119-82035-5	80	1/2" x 24"	
051141-30689-6	120		
051141-30693-3	36		
051111-68669-0	60	1/2" x 24"	
051111-68696-6	80		
051111-69436-7	120		
051141-30687-2	36	3/4" x 18"	
051115-19553-2	60		
051125-19076-3	80		
051141-30688-9	120	3/4" x 20-1/2"	
051125-16745-1	60		
051111-68697-3	80		
051125-22333-1	120	1" x 18"	
051119-71425-8	60		
051125-23878-6	80		
051141-30692-6	120	2" x 48"	
051115-19554-9	60		
051119-05579-5	80		
051125-11238-3	120	2" x 60"	
051141-30699-5	36		
051111-69103-8	60		
051141-30703-9	80	2" x 72"	
051141-30704-6	120		
051141-30698-8	36		
051111-69104-5	60	2" x 72"	
051141-30701-5	80		
051141-30697-1	120		

See pages 67–72 for available accessories.

## 3M™ Belts (cont.)


### 577F (cont.)

UPC	Grade	W x L	Qty./Case
051111-67602-8	36	2" x 132"	50
051141-30702-2	50		
051111-69105-2	60		
051111-69108-3	80		
051141-30696-4	120		
051119-64999-4	36	2-1/2" x 60"	50
051111-69106-9	60		
051125-12707-3	80		
051141-30706-0	120		
051111-69099-4	36	3" x 132"	25
051119-82066-9	50		
051111-69569-2	60		
051111-69571-5	80		
051111-67681-3	120		
051119-67701-0†	60	3-1/2" x 15-1/2"	50
051119-58968-9†	80		
051119-67700-3†	120		
051111-67604-2	36	4" x 132"	25
051115-27562-3	50		
051111-69570-8	60		
051111-69573-9	80		
051125-23987-5	120		
051111-69445-9	60		
051119-83855-8	80		
051141-30707-7	120		
051111-69440-4	36	37" x 60"	2
051111-68691-1	60		
051111-69111-3	80		5
051111-69115-1	120		
051125-22740-7	180		
051119-61101-4	36	37" x 75"	2
051111-68692-8	60		
051111-69112-0	80		5
051111-67688-2	120		
051125-09283-8	180		

† Made-to-Order

### 747D

- 3M™ Ceramic Aluminum Oxide blend abrasive grain on an X wt. cloth backing
- Use for offhand heat sensitive stainless steel applications
- Grinding aid enhances performance on stainless steel and other exotic alloys
- Well suited for stroke sanding applications

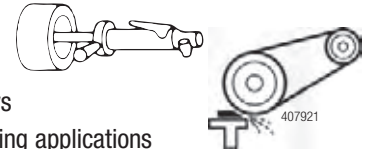

UPC	Grade	W x L	Min./Case
051111-67749-0†	50	3" x 9-1/2"	200
051111-67759-9†	60		
051111-67789-6†	P100		
051111-67806-0†	P120	3" x 118"	50
051111-67807-7†	P120		
051115-27355-1†	60	3" x 132"	10
051111-68923-3†	P120		
051111-67751-3†	50	6" x 264"	20
051111-67766-7†	60		
051111-67778-0†	80		
051125-20535-1†	P100	6" x 274"	10
051111-67812-1†	P120		
051144-85846-0†	60	6" x 300"	20
051111-67779-7†	80		
051111-67767-4†	60	6" x 355"	10
051111-67781-0†	80		
051111-67813-8†	P120	6" x 360"	10
051115-19560-0†	50		
051111-67755-1†	50		

† Made-to-Order


**ATTENTION: Belts are available in other grades and sizes. If you need a specific belt not listed, contact your 3M Sales Specialist or 3M Authorized Distributor.**

See pages 67–72 for available accessories.

### 3M™ Belts (cont.)

**777F**

- 3M™ Ceramic Aluminum Oxide blend abrasive grain on a YF wt. cloth backing
- Contains grinding aid which enhances performance on stainless steel and other exotic alloys
- Can be run wet or dry



UPC	Grade	W x L	Min./Case
<b>Backstand, Benchtop, Portable Tool</b>			
051144-84403-6	60	1/4" x 18"	200
051144-85318-2	80		
051144-19579-2	P120		
051144-84412-8	40	1/4" x 24"	
051144-80253-1	60		
051144-77642-9	80		
051144-82229-4	P120	1/2" x 12"	
051111-69457-2	60		
051144-85372-4	80		
051111-69604-0	P120	1/2" x 18"	
051144-84301-5	36		
051144-84409-8	40		
051144-80551-8	60		
051144-80232-6	80		
051144-84304-6	P120		
051144-77643-6	36		
051144-82342-0	40		
051144-77408-1	50		
051144-77065-6	60		
051144-77491-3	80		
051144-81064-2	P120	3/4" x 18"	
051144-84302-2	36		
051144-84404-3	60		
051144-77992-5	80	3/4" x 20-1/2"	
051144-84303-9	P120		
051144-80486-3	60		
051144-80686-7	80	1" x 18"	
051125-23897-7	60		
051144-85319-9	80		
051141-30705-3	P120	1" x 42"	
051144-76527-0	40		
051144-77512-5	60		
051144-14895-0	80	1-1/2" x 60"	
051144-84416-6	60		
051144-76731-1	80		
051144-82022-1	P120		

**777F (cont.)**

UPC	Grade	W x L	Min./Case
<b>Backstand, Benchtop, Portable Tool</b>			
051144-76738-0	36	2" x 48"	10/50
051144-76519-5	60		25/50
051144-14896-7	80		
051144-85393-9	P120	2" x 60"	50
051144-77663-4	36		
051144-77152-3	60		
051144-84296-4	80	2" x 72"	
051144-85377-9	P120		
051144-76531-7	36		
051144-80286-9	60	2" x 132"	
051144-14884-4	80		
051144-81767-2	P120		
051144-14264-4	36		
051144-14899-8	50		
051144-82231-7	60		
051144-14534-8	80	2-1/2" x 60"	
051144-81687-3	P120		
051144-84315-2	P180		
051144-76532-4	36		
051144-77825-6	40		
051144-76680-2	60		
051144-76686-4	80	3" x 132"	
051115-27389-6	P120		
051144-76533-1	36		
051111-69455-8	50		
051144-76520-1	60		
051144-76514-0	80		
051144-80028-5	P120	3-1/2" x 15-1/2"	
051144-85762-3	P180		
051144-77336-7	36		
051144-77334-3	50		
051144-77476-0	60		
051144-77333-6	80		
051144-84306-0	100	4" x 132"	
051144-84307-7	P120		
051144-85320-5	P180		
051144-76534-8	36		
051111-67851-0	50		
051144-80707-9	60		
051144-76515-7	80	25/50	
051141-30700-8	P120		25

See pages 67–72 for available accessories.


### 3M™ Belts (cont.)

#### 777F (cont.)

UPC	Grade	W x L	Min./Case
<b>Backstand, Benchtop, Portable Tool</b>			
051144-82313-0	36	6" x 48"	10/20
051144-80176-3	50		
051144-76679-6	60		
051144-76733-5	80		
051144-82153-2	P120	37" x 60"	2
051125-33828-8	36		
051115-27354-4	60		
051144-77351-0	80		
051144-80450-4	P120		5
051111-69127-4	P180		
051119-75481-0	36		
051111-69122-9	60		
051144-82930-9	80	37" x 75"	2
051144-84947-5	P120		
051111-69128-1	P180		5

#### 963G

- 3M™ Ceramic abrasive grain on a YN wt. cloth backing
- Water-resistant polyester cloth backing for heavy grinding
- Can be run wet or dry



UPC	Grade	W x L	Qty./Case
<b>Backstand, Benchtop</b>			
051144-74228-8†	24	2" x 132"	50
051111-68163-3	60		50
051144-74229-5†	24	3" x 132"	25
051144-74207-3	36 L-flex		
051144-74324-7	60		
051144-13715-2	80 L-flex	4" x 132"	
051111-68109-1†	24		
051144-74209-7	36		
051144-74330-8	40		
051144-74325-4	60	6" x 132"	10
051144-84491-3†	36		20
051111-68168-8†	60		

† Made-to-Order

#### 966F

- 3M™ Ceramic abrasive grain on a YF wt. cloth backing
- Water-resistant polyester cloth backing
- Resin bonded for heat resistance
- Designed for wet centerless grinding applications on carbon steel, heat sensitive high nickel alloys, titanium and stainless steel
- Ideal for stripping chrome from old parts



UPC	Grade	W x L	Qty./Case
051119-09003-1†	36	3" x 132"	25
051119-78104-5	36	4" x 132"	
051119-10654-1†	80		
051119-78105-2†	80 sine	4" x 132"	10
051115-27128-1	60		
051111-68321-7†	36	9" x 120"	20
051115-27315-5	50		
051125-14381-3	60		
051111-68326-2†	80		
051115-27404-6†	80 L-flex	12 x 144"	5
051125-12989-3†	40		
051115-27990-4	50		
051119-83152-8†	60	Belt sizes made to order. Specify UPC, grade and belt size (W" x L")	Determined by belt size.
051135-13609-6	24		
051135-13660-7	36		
051135-13684-3	40		
051135-13683-6	50		
051135-13682-9	60		
051135-13681-2	80		

† Made-to-Order


**ATTENTION: Belts are available in other grades and sizes. If you need a specific belt not listed, contact your 3M Sales Specialist or 3M Authorized Distributor.**

See pages 67–72 for available accessories.

### 3M™ Belts (cont.)

#### 977F

- 3M™ Ceramic abrasive grain on a YF wt. cloth backing
- Recommended for both wet or dry grinding of stainless steel and high nickel alloys
- Works well in all grinding pressures

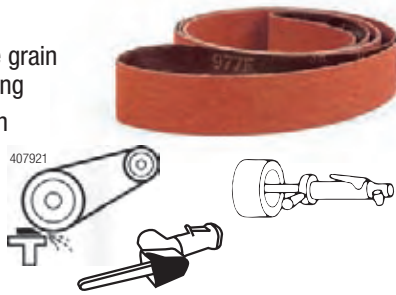

159098

UPC	Grade	W x L	Qty./Case
051111-68989-9†	60	1" x 11"	500
051111-68602-7†	80		
051111-68527-3†	40		
051115-27684-2†	120	1" x 42"	200
051111-68530-3†	40	1" x 132"	100
051111-68548-8†	50		
051111-68583-9†	60		200
051115-27336-0†	80		
051111-68532-7†	40	2" x 48"	
051119-09500-5†	60		
051144-85389-2	36	2" x 72"	50
051111-69519-7†	40		
051111-68552-5†	50		
051144-85383-0	60		
051144-84008-3	80		
051111-69514-2	120		
051111-68534-1†	40 L-flex	2" x 118"	50
051111-68535-8†	40		
051144-83522-5	36	2" x 132"	50
051111-68537-2†	40		
051144-85015-0	50		
051144-85384-7	60		
051144-85769-2	80		
051111-68631-7†	100		
051111-68640-9†	120		
051111-68485-6†	24		
051111-68506-8†	36 L-flex		
051111-68507-5†	36		
051144-82798-5	40	3" x 132"	25
051111-68557-0†	50 L-flex		
051111-69165-6†	50		
051111-69166-3†	60		
051119-08175-6†	60 full flex		
051144-85378-6	80		
051119-77855-7†	100		
051111-68645-4†	120		

#### 977F (cont.)

UPC	Grade	W x L	Qty./Case
051111-69522-7†	60	3-1/2" x 15-1/2"	50
051125-18646-9†	80		
051125-23841-0†	100		
051111-68593-8†	60	4" x 90"	
051125-10597-2†	80		
051125-11234-5†	120	4" x 132"	25
051144-85390-8†	36 L-flex		
051111-68511-2†	36		
051119-65751-7†	40		
051125-15945-6†	40 full flex		
051111-69351-3†	50		
051111-69352-0†	50 L-flex		
051115-27540-1†	60		
051111-68594-5†	60 L-flex		
051111-68619-5†	80		
051144-85387-8†	40 L-flex	6" x 132"	20
051125-17018-5†	40 full flex		
051111-68518-1†	36 sine		
051115-19611-9†	36 film	8" x 132"	10
051111-68596-9†	60		
051115-27541-8†	80	8" x 132"	20
051111-68524-2†	36		
051111-68597-6†	60		

† Made-to-Order

See pages 67–72 for available accessories.

### 3M™ Belts (cont.)

#### 3M™ Cubitron™ II Metalworking Belt 984F

- 3M precision-shaped grain
- Average up to 30% faster cutting on hard-to-grind metals than the next-best competitive belt
- Lasts up to 4 times as long as conventional ceramic aluminum oxide belts
- Cuts cooler — diverts heat from the work piece and belt to the swarf
- Helps eliminate burnishing and heat stress



UPC	Grade	W x L	Min./Case
051141-27511-6†	36+	1/2" x 18"	25
051141-27512-3†		1/2" x 24"	
051141-27514-7†		1" x 132"	100
051141-27460-7†		2" x 132"	25
051141-27516-1†		2" x 72"	
051141-27461-4†		3" x 132"	
051141-27462-1†		4" x 132"	
051141-27515-4†		6" x 132"	10
051141-27513-0†	8" x 132"		

† Made-to-Order

See pages 67–72 for available accessories.



**ATTENTION: Belts are available in other grades and sizes. If you need a specific belt not listed, contact your 3M Sales Specialist or 3M Authorized Distributor.**

## 3M™ Trizact™ Abrasive Belts

The unique microreplicated construction used in 3M™ Trizact™ Abrasives can deliver consistent, predictable finishes, higher, more even rates of cut, cooler grinding and finishing temperatures, and reduced processing steps. 3M invented microreplication technology, which is the science of creating small, precisely shaped three-dimensional structures and then reproducing them on a variety of surfaces.


### Trizact Abrasive Grading System

The unique construction of Trizact abrasives requires a different grading system. Grade is defined by the average particle size in microns and begins with an “A”.

Trizact Abrasive Grade	FEPA (P-Grade)
A5	P3000
A6	—
A10	P1500
A16	P1200
A20	P1000
A30	P600
A35	—
A45	P400
—	P320
A60	—
A65	—
A75	P240
A80	—
A90	P220
A100	P180
A110	P180
A130	P150
A160	P120

### The Difference is in the Construction


Trizact abrasives allow you to say “goodbye” to erratic, inconsistent finishes generated by conventional coated abrasives. Here’s why:

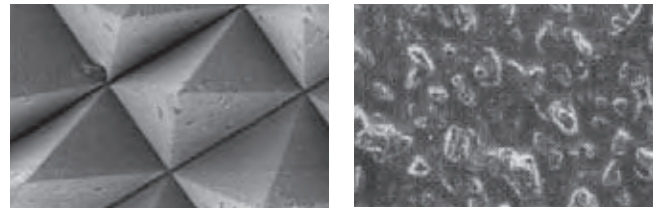

Three-dimensional structures uniformly distributed over the entire surface of 3M™ Trizact™ Abrasives (left) ensure consistent performance and eliminate belt-to-belt variation. Conventional abrasives (right), which feature randomly arranged minerals, wear and finish unevenly.



Conventional abrasives start out sharp, but they dull quickly.

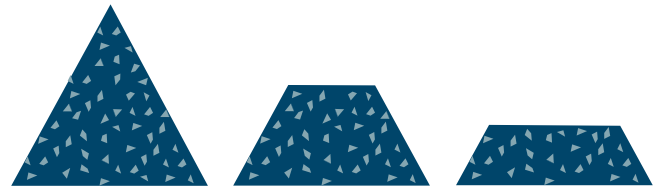

3M™ Trizact™ Abrasives have three-dimensional structures containing multiple layers of abrasive mineral. As these pyramid-like structures wear, fresh, sharp mineral is exposed.

**ATTENTION: Belts are available in other grades and sizes. If you need a specific belt not listed, contact your 3M Sales Specialist or 3M Authorized Distributor.**

See pages 67–72 for available accessories.

### 3M™ Trizact™ Belts

#### 3M™ Trizact™ 217EA

- Ideal for aluminum, copper, brass and zinc alloys to final finishing




- Good for low pressure application
- Flexible belt for intermediate finish and dimensioning

UPC	Grade	W x L	Min./Case
051125-23664-5†	A45	4" x 84"	50
051125-15686-8†	A45	4" x 106"	
051125-20639-6†	A6	4" x 118"	
051125-14350-9†	A16		
051111-66834-4†	A30		
051125-13733-1†	A45		
051125-16987-5†	A16	4" x 120"	
051111-66830-6†	A6	4" x 132"	
051111-69360-5†	A16		
051111-66835-1†	A30		
051111-66841-2†	A45		
051111-69669-9†	A65		
051119-05828-4†	A80		
051125-12699-1†	A30	4" x 168"	
051125-12479-9†	A80		

† Made-to-Order

#### 3M™ Trizact™ 237AA

- Semi-flexible abrasive
- Aluminum oxide mineral
- Great choice for stainless steel finishes

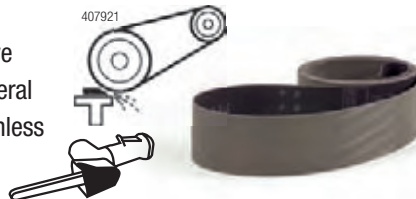

UPC	Grade	W x L	Qty./Case
051119-82624-1†	A6	1" x 11"	500
051125-32361-1†	A16		
051115-27208-0†	A45		
051111-66892-4†	A65		
051111-69366-7†	A100	1" x 12"	200
051125-22681-3†	A100		
051111-69377-3†	A30	1" x 30"	20
051125-15699-8†	A16	1" x 42"	
051125-08603-5†	A100		
051111-69676-7†	A160		
051119-09095-6†	A6	1" x 60"	200
051119-09093-2†	A16		
051119-10286-4†	A45		
051115-27051-2†	A65		

† Made-to-Order

#### 3M™ Trizact™ 237AA (cont.)

UPC	Grade	W x L	Qty./Case
051119-10263-5†	A6	1" x 64"	200
051125-55143-4†	A16	1" x 65"	
051111-66945-7†	A100	1" x 130"	20
051115-27112-0†	A45	1" x 132"	200
051115-27111-3†	A100		
051115-27804-4†	A100	2" x 34"	50
051111-69673-6†	A16	2" x 48"	25/50
051115-27731-3†	A30		
051119-09379-7†	A45		
051125-20671-6†	A80		
051111-69043-7†	A100	2" x 60"	50
051119-84184-8†	A160		
051115-27408-4†	A65		
051119-59769-1†	A80		
051125-54544-0†	A100	2" x 72"	25/50
051115-27487-9†	A16		
051115-27653-8†	A30		
051115-27787-0†	A65		
051115-27904-1†	A80	2" x 72"	25/50
051111-69671-2†	A100		50
051115-27849-5†	A160	2" x 107"	25/50
051111-69369-8†	A16		50
051111-69680-4†	A45	2" x 118"	25/50
051111-66938-9†	A80		50
051111-69383-4†	A6	2" x 118"	50
051111-66860-3†	A16		
051125-22263-1†	A30	2" x 132"	25/50
051111-66856-6†	A6		
051111-69370-4†	A16		
051115-27658-3†	A30		
051111-69028-4	A45	2" x 148"	50
051111-69036-9†	A65		
051111-69044-4	A100	2" x 157"	50
051119-77007-0†	A16		
051125-20169-8†	A100	2" x 157"	50
051125-22175-7†	A65		
051111-69294-3†	A6	3" x 24"	200
051111-69290-5†	A16		
051111-69291-2†	A30	3" x 60"	25/50
051125-14935-8†	A80		
051119-83067-5†	A16	3" x 72"	25/50
051111-69045-1†	A100		
051119-82467-4†	A80		
051111-69295-0†	A160		

† Made-to-Order



### 3M™ Trizact™ Belts (cont.)

#### 3M™ Trizact™ 237AA (cont.)

UPC	Grade	W x L	Qty./Case
051111-69015-4†	A16	3" x 90"	50
051111-69021-5†	A30		
051111-69029-1†	A45		
051111-69047-5†	A100		
051111-66863-4†	A16	3" x 118"	50
051111-69022-2†	A30		
051125-19954-4†	A6	3" x 132"	50
051111-51199-2	A16		
051111-51207-4	A30		
051111-51209-8	A45		
051111-69037-6†	A65		
051111-69051-2†	A160		
051111-66864-1†	A16	3" x 148"	50
051111-69292-9†	A30		
051111-69293-6†	A45	3" x 157"	25
051115-26995-0†	A45		
051115-27921-8†	A65	3" x 168"	50
051125-19529-4†	A80		
051115-27798-6†	A16	3" x 300"	50
051111-66876-4†	A30		
051115-28033-7†	A45	3" x 346"	25
051111-69371-1†	A16		
051111-69381-0†	A45	4" x 36"	50
051111-69385-8†	A65		
051115-27777-1†	A80	4" x 40"	50
051115-27145-8†	A65		
051111-66949-5†	A100	4" x 48"	50
051125-11794-4†	A100		
051119-68279-3†	A100	4" x 72"	50
051115-27859-4†	A16		
051125-10967-3†	A65	4" x 84"	50
051119-67382-1†	A100		
051115-27749-8†	A6	4" x 90"	25/50
051111-69016-1†	A16		
051111-51204-3	A30		
051111-69030-7†	A45		
051119-73517-8†	A65		
051115-27592-0†	A80		
051111-69672-9†	A100		
051115-27593-7†	A160		

† Made-to-Order

#### 3M™ Trizact™ 237AA (cont.)

UPC	Grade	W x L	Qty./Case
051115-27153-3†	A30	4" x 106"	50
051115-26818-2†	A100		
051111-66867-2†	A16	4" x 118"	50
051111-66878-8†	A30		
051111-66888-7†	A45		
051111-66897-9†	A65		
051125-17651-4†	A100		
051115-26883-0†	A30	4" x 124"	25/50
051111-69251-6†	A6	4" x 132"	50
051111-69017-8	A16		
051111-51214-2	A30		
051111-69031-4†	A45		
051111-69387-2†	A65		
051111-66941-9†	A80		
051111-69048-2†	A100		
051111-69375-9†	A160		
051111-66950-1†	A100		
051125-11757-9†	A45		4" x 146"
051115-27521-0†	A16	4" x 158"	50
051119-10264-2†	A30		
051119-08908-0†	A65	4" x 168"	50
051111-69681-1†	A45		
051115-27303-2†	A160	4" x 274"	25
051115-27467-1†	A65	4" x 352"	50
051111-68739-0†	A100		
051111-68738-3†	A160	4" x 354"	25
			50


† Made-to-Order

**ATTENTION: Belts are available in other grades and sizes. If you need a specific belt not listed, contact your 3M Sales Specialist or 3M Authorized Distributor.**

### 3M™ Trizact™ Belts (cont.)

#### 3M™ Trizact™ 253FA

- Ideal for wet flat-finishing and wet intermediate finishing of centerless applications
- Great on stainless steel, carbon steel and carbon fibre composites



UPC	Grade	W x L	Min./Case
051135-13635-5	A6	Belt sizes made to order. Specify UPC, grade and belt size (W" x L"). Belts wider than 25" require multiple splices.	Determined by belt size.
051135-13636-2	A16		
051135-13637-9	A30		
051135-13638-6	A45		
051135-13639-3	A65		
051135-13640-9	A80		
051135-13641-6	A100		

#### 3M™ Trizact™ 307EA

- Flexible cloth backing
- Aluminum oxide mineral
- Perfect choice for preplate surface finishes



UPC	Grade	W x L	Min./Case
051111-67100-9†	A80	1" x 42"	200
051111-69408-4†	A100		50/200
051111-67101-6†	A80	1" x 60"	200
051115-27801-3†	A16	1" x 72"	
051115-27448-0†	A45		
051125-14659-3†	A65		
051119-63318-4†	A6	1" x 76"	
051125-50495-9†	A30		
051111-67055-2†	A6	1" x 77"	
051111-67068-2†	A30		
051115-19520-4†	A45		
051115-26828-1†	A6	1" x 132"	200
051115-27410-7†	A16		
051115-27346-9†	A45		
051115-27491-6†	A80		
051125-20660-0†	A30	2" x 17"	50
051115-27830-3†	A16	2" x 36"	
051125-40962-9†	A65	2" x 48"	
051119-58606-0†	A30	2" x 60"	
051119-75663-0†	A45		
051125-46217-4†	A65		
051125-11024-2	A6	2" x 72"	
051111-69061-1	A16		
051111-69067-3	A30		
051111-69072-7†	A45		
051111-69074-1†	A65		
051111-69079-6	A100		
051125-34816-4	A30	2" x 76"	
051111-61067-1†	A6	2" x 83"	
051111-61066-4	A16	2" x 90"	50
051115-27125-0†		2" x 96"	
051125-47160-2†	A65	2" x 118"	
051111-68818-2†	A6		
051119-09343-8†	A16		
051125-20950-2†	A30		
051125-20345-6†	A45		

† Made-to-Order

### 3M™ Trizact™ Belts (cont.)

#### 3M™ Trizact™ 307EA (cont.)

UPC	Grade	W x L	Min./Case	
051111-51206-7	A6	2" x 132"	25/50	
051111-51202-9	A16			
051111-69068-0	A30			
051111-51210-4	A45			
051111-69075-8	A65			
051111-69077-2	A80			
051111-69080-2	A100			
051111-69409-1†	A16		2" x 138"	50
051111-67059-0†	A6			
051115-19517-4†	A16	2" x 148"	25/50	
051111-69069-7†	A30			
051125-20168-1†	A45			
051111-67091-0†	A65			
051111-67064-4†	A16		3" x 60"	50
051115-27893-8†			3" x 72"	
051125-38992-1†	A30	3" x 72"	25/50	
051125-30837-3†	A100	3" x 90"		
051111-69410-7†	A16	3" x 90"	50	
051125-49713-8†	A65	3" x 96"		
051111-67077-4†	A30	3" x 118"	50	
051111-69256-1†	A65			
051111-68819-9†	A6			
051111-69063-5†	A16			
051111-51203-6	A30			
051111-67084-2†	A45			
051111-67106-1†	A80			
051111-67111-5†	A100			
051115-27418-3†	A16	3" x 120"	50	
051125-20567-2†	A30			
051125-30879-3†	A45			
051111-69059-8†	A6			
051125-13220-6†	A16 full flex	3" x 132"	25/50	
051111-51200-5	A16			
051111-51201-2	A30			
051125-16874-8†	A30 full flex			
051111-69073-4	A45			
051111-69076-5†	A65			
051111-69078-9	A80			
051111-69082-6†	A100			
051111-67065-1†	A16	3" x 148"	50	
051115-27594-4†	A6			
051115-19518-1†	A16	3" x 168"	25/50	
051111-67087-3†	A45			

† Made-to-Order

#### 3M™ Trizact™ 307EA (cont.)

UPC	Grade	W x L	Min./Case	
051115-27604-0†	A30	4" x 36"	50	
051111-69060-4†	A6	4" x 90"		
051111-69064-2†	A16			
051115-19522-8†	A65	4" x 118"	25/50	
051125-22401-7†	A6			
051111-69065-9	A16			
051111-69070-3†	A30			
051111-67107-8†	A80			
051111-67112-2†	A100			
051115-27766-5†	A6			
051111-69066-6†	A16			
051111-69071-0	A30	4" x 132"	50	
051111-51212-8	A45			
051115-26922-6†	A80			
051119-73781-3†	A100			
051111-68821-2†	A30	4" x 168"		25
051115-26997-4†	A16			
051111-67113-9†	A100	4" x 240"		50

† Made-to-Order

#### 3M™ Trizact™ 327DC

- Use for mill line removal, intermediate scratch refinement, consistent dimensioning and consistent finishing applications
- Macroreplicated aluminum oxide on a flexible backing
- Grinding aid
- For dry use only

**NEW!**  
to Catalog




UPC	Grade	W x L	Min./Case
051135-94693-0	A30	Belt sizes made to order. Specify UPC, grade and belt size (W" x L"). Belts wider than 25" require multiple splices.	Determined by belt size.
051135-94692-3	A45		
051135-94691-6	A65		
051135-94690-9	A100		
051135-29683-7	A160		
051135-94689-3	A300		

**ATTENTION: Belts are available in other grades and sizes. If you need a specific belt not listed, contact your 3M Sales Specialist or 3M Authorized Distributor.**

### 3M™ Trizact™ Belts (cont.)

#### 3M™ Trizact™ CF 337DC

- Macroreplicated structure provides long product life and consistent cut and finish



311760

UPC	Grade	W x L	Qty./Case
<b>Backstand</b>			
051141-20646-2†	A300	1" x 132"	100
048011-33156-0	A45	2" x 60"	5
048011-33155-3	A65		
048011-33154-6†	A100		
048011-33153-9†	A160		
048011-33152-2†	A300		
048011-33161-4†	A45	2" x 72"	
048011-33160-7†	A65		
048011-33159-1†	A100		
048011-33158-4†	A160		
048011-33157-7†	A300	2" x 132"	
048011-33166-9†	A45		
048011-33165-2†	A65		
048011-33164-5†	A100		
048011-33163-8†	A160		
048011-33162-1†	A300	3" x 132"	
048011-33171-3†	A45		
048011-33170-6†	A65		
048011-33169-0†	A100		
048011-33168-3†	A160		
048011-33167-6†	A300		

† Made-to-Order

#### 3M™ Trizact™ 347FC

- 3M™ Ceramic abrasive grain on a macroreplicated, flexible X-wt. backing
- For high-pressure applications on hard metals, nickel alloys, titanium and stainless steel




UPC	Grade	W x L	Min./Case
051125-64275-0	A30	Belt sizes made to order. Specify UPC, grade and belt size (W" x L"). Belts wider than 25" require multiple splices.	Determined by belt size.
051125-64274-3	A45		
051125-64273-6	A65		
051125-64272-9	A100		
051125-64271-2	A160		
051125-64270-5	A300		



#### 3M™ Trizact™ Cloth Belts 363FC

- Centerless/cylindrical/flat part grinding and finishing
- Macroreplicated aluminum oxide on a durable YF-wt cloth backing
- Use wet on zirconium, titanium, carbon steel, stainless steel and other alloys
- Long belt life improves productivity
- Reduce or eliminate belt break-in
- Consistent cut rate and finish from heavy deburring and defect removal to intermediate finishing

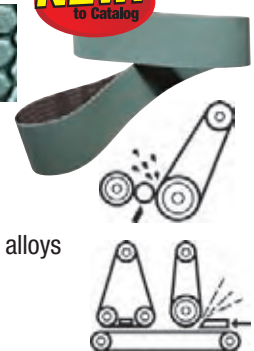

UPC	Grade	Common Sizes W x L	Min./Case
051135-98214-3	A30	Belt sizes made to order. Specify UPC, grade and belt size (W" x L"). Belts wider than 25" require multiple splices.	Determined by belt size.
051135-98213-6	A45		
051135-98212-9	A65		
051135-98211-2	A100		
051135-98210-5	A160		
051135-98209-9	A300		

#### 3M™ Trizact™ 407EA

- Use for mill line removal, intermediate scratch refinement, consistent dimensioning and consistent finishing applications
- Silicon carbide constructed on a flexible rayon cloth backing
- Grinding aid for cooler grinding
- Resin bonded for heat resistance



UPC	Grade	W x L	Min./Case
051135-91841-8	A20	Belt sizes made to order. Specify UPC, grade and belt size (W" x L"). Belts wider than 25" require multiple splices.	Determined by belt size.
051144-99004-7	A60		
051144-99005-4	A90		
051135-90527-2	A110		

### 3M™ Trizact™ Belts (cont.)

#### 3M™ Trizact™ Cloth Belts 463FC


- Wet centerless/flat part/finishing/polishing
- Macroreplicated silicon carbide on a durable YF-wt cloth backing
- Use wet on zirconium, titanium, carbon steel, stainless steel and other alloys
- Long belt life improves productivity
- Reduce or eliminate belt break-in
- Consistent finer grade ranges for fine finishes on all metals.



UPC	Grade	W x L	Min./Case
051135-98191-7	A6	Belt sizes made to order. Specify UPC, grade and belt size (W" x L"). Belts wider than 25" require multiple splices.	Determined by belt size.
051135-97955-6	A10		
051135-97954-9	A20		
051135-98047-7	A30		
051135-97953-2	A45		

#### 3M™ Trizact™ Belts 953FA

- Process flexible belt that delivers consistent, predictable results
- Ideal for more aggressive cutting applications



UPC	Grade	W x L	Qty./Case
051119-08900-4†	A6	6" x 137-1/2"	20
051125-23055-1†	A10		
051125-18942-2†	A16	7-7/8" x 82-3/4"	
051125-18944-6†	A30		
051119-09263-9†	A45		
051125-18943-9†	A65		
051119-09262-2†	A80	9" x 120"	
051115-27716-0†	A16		
051115-27728-3†	A30		
051125-21425-4†	A30		
051125-17933-1†	A45		
051125-13155-1†	A65		
051125-21426-1†	A65 sine		
051125-18774-9†	A100		
051115-27793-1†	A300		

† Made-to-Order

**ATTENTION: Belts are available in other grades and sizes. If you need a specific belt not listed, contact your 3M Sales Specialist or 3M Authorized Distributor.**

## 3M™ Utility Cloth Sheet and Roll Selection Guide

	Product ID	Mineral	Backing	Features	Blending	Finishing	Cleaning
<b>Good</b>	011K	Aluminum Oxide	Flexible Utility Cloth	Closed Coat; General purpose use	●	●	●
<b>Better</b>	211K	Aluminum Oxide	Flexible Utility Cloth	Use for all general maintenance work		●	
<b>Best</b>	314D	Premium Aluminum Oxide	Durable Cloth	Strong bonding system for shelling resistance	●	●	●

### Utility Cloth Sheets and Rolls

#### 3M™ Utility Cloth Sheets 011K

- Aluminum Oxide mineral
- General purpose use



UPC	Grade	W x L	Min./Case
<b>Sheets</b>			
051144-02433-9	CRS	9" x 11"	50/250
051144-02432-2	MED		
051144-02431-5	FINE		

#### 3M™ Utility Cloth Sheets and Rolls 211K

- Aluminum Oxide on a J wt. cloth backing
- Use these flexible utility rolls and sheets for general applications such as deburring, rust removal, strapping and all general maintenance work



UPC	Grade	W x L	Min./Case
<b>Sheets</b>			
051144-02410-0	80	9" x 11"	50/250
051144-02409-4	100		
051144-02408-7	120		
051144-02407-0	150		
051144-02406-3	180		
051144-02405-6	220		
051144-02404-9	240		
051144-02402-5	320		
051144-12501-2	400		
051144-12500-5	500		

#### 3M™ Utility Cloth Sheets and Rolls 211K (cont.)

UPC	Grade	W x L	Min./Case
<b>Utility Rolls</b>			
051144-05010-9	80	1" x 50 yds.	
051144-05009-3	100		
051144-05008-6	120		
051144-05007-9	150		
051144-05006-2	180		
051144-05005-5	220		
051144-05004-8	240		
051144-05003-1	280		
051144-05002-4	320		
051144-05001-7	400		
051144-05000-0	500	1-1/2" x 50 yds.	1/5
051144-05030-7	80		
051144-05029-1	100		
051144-05028-4	120		
051144-05027-7	150		
051144-05026-0	180		
051144-05025-3	220		
051144-05024-6	240		
051144-05022-2	320		
051144-05021-5	400		
051144-05020-8	500		
051144-05050-5	80		
051144-05049-9	100		
051144-05048-2	120		
051144-05047-5	150		
051144-05046-8	180		
051144-05045-1	220		
051144-05044-4	240		
051144-05042-0	320		
051144-05041-3	400		
051144-05040-6	500		

See pages 67–72 for available accessories.

## Utility Cloth Sheets and Rolls (cont.)

### 3M™ Utility Cloth Sheets and Rolls 314D

- Aluminum Oxide on X and J wt. cloth backings
- Ideal for all utility jobs
- Can be torn into strips and rolled without shelling



UPC	Grade	Backing	W x L	Min./Case
<b>Sheets</b>				
051115-19775-8	P40	X wt.	9" x 11"	50/250
051115-19774-1	P50			
051115-19773-4	P60			
051115-19772-7	P80	J wt.		
051115-19771-0	P100			
051115-19770-3	P120			
051115-19769-7	P150			
051115-19768-0	P180			
051115-19767-3	P220			
051115-19766-6	P240			
051115-19765-9	P280			
051115-19764-2	P320			
051115-19763-5	P400			
<b>Utility Rolls</b>				
051115-19794-9	P50	X wt.	1" x 50 yds.	1/5
051115-19793-2	P60	J wt.		
051115-19792-5	P80			
051115-19791-8	P100			
051115-19790-1	P120			
051115-19789-5	P150			
051115-19788-8	P180			
051115-19787-1	P220			
051115-19786-4	P240			
051115-19785-7	P280			
051115-19784-0	P320			
051115-19783-3	P400			

### 3M™ Utility Cloth Sheets and Rolls 314D (cont.)

UPC	Grade	Backing	W x L	Min./Case
<b>Utility Rolls</b>				
051115-19813-7	P50	X wt.	1-1/2" x 50 yds.	1/5
051115-19812-0	P60			
051115-19811-3	P80			
051115-19810-6	P100	J wt.		
051115-19809-0	P120			
051115-19808-3	P150			
051115-19807-6	P180			
051115-19806-9	P220			
051115-19805-2	P240			
051115-19804-5	P280			
051115-19803-8	P320			
051115-19802-1	P400			
051115-19826-7	P40	X wt.	2" x 50 yds.	1/5
051115-19825-0	P50	J wt.		
051115-19824-3	P60			
051115-19823-6	P80			
051115-19822-9	P100			
051115-19821-2	P120			
051115-19820-5	P150			
051115-19819-9	P180			
051115-19818-2	P220			
051115-19817-5	P240			
051115-19816-8	P280			
051115-19815-1	P320			
051115-19814-4	P400			

### 3M™ Portable Utility Roll 314D

- Portable for ease of use at jobsite
- Protective plastic pack resists dirt, oil, water and serves as a convenient dispenser
- Aluminum oxide abrasive product sheets constructed on X- or J-weight, durable cloth backing



UPC	Grade	W x L	Qty./Case
051141-20963-0	P60 X	1" x 8 yds.	1/5
051141-20964-7	P80 J	1" x 12 yds.	
051141-20965-4	P120 J	1" x 16 yds.	
051141-20966-1	P180 J	1" x 20 yds.	
051141-20967-8	P240 J		
<b>1" Portable Utility Roll Kit</b>			
051141-20968-5	Kit contains one (1) each of the above utility rolls		1/5

See pages 67–72 for available accessories.

### 3M™ Wetordry™ Sheet Selection Guide

	Product ID	Mineral	Backing	Blending	Finishing
Better	431Q	Silicon Carbide	C wt. Paper	●	
	413Q		A wt. Paper		●

### 3M™ Wetordry™ Sheets

3M™ Wetordry™ construction reduces clogging, helps eliminate dust, extends abrasive life and improves finish.

#### 3M™ Wetordry™ Sheets 413Q


- Silicon Carbide on an A wt. paper backing
- Reduced clogging eliminates dust when used wet
- Excellent conformability



UPC	Grade	W x L	Min./Case
051144-02007-2	220	9" x 11"	50/500
051144-02006-5	240		50/250
051144-02005-8	280		50/500
051144-02004-1	320		50/250
051144-02003-4	360		50/500
051144-02002-7	400		50/500

#### 3M™ Wetordry™ Paper Sheets 431Q

- Silicon Carbide on a C wt. paper backing
- Reduced clogging eliminates dust when used wet
- Heavyweight paper backing for increased durability



UPC	Grade	W x L	Min./Case
051144-02018-8	80	9" x 11"	50/250
051144-02017-1	100		
051144-02016-4	120		
051144-02015-7	150		
051144-02014-0	180		

### 3M™ Paper Sheet Selection Guide

	Product ID	Mineral	Backing	Blending	Finishing
Good	210N	Aluminum Oxide	A wt. Paper		●
Better	336U	Aluminum Oxide	C wt. Paper	●	
Best	346U	Aluminum Oxide	D wt. Paper	●	

### 3M™ Paper Sheets

#### 3M™ Paper Sheets 210N

- Aluminum Oxide on an A wt. paper backing
- Open Coat
- Provides exceptional conformability for contour sanding

UPC	Grade	W x L	Min./Case
051144-02104-8	180	9" x 11"	100/1000
051144-02103-1	220		

#### 3M™ Paper Sheets 336U

- Aluminum Oxide on a C wt. paper backing
- Medium-weight sheets for general-purpose sanding
- Open coat resists loading on soft materials



UPC	Grade	W x L	Min./Case
051144-02114-7	100	9" x 11"	100/1000
051144-02113-0	120		
051144-02112-3	150		

#### 3M™ Paper Sheets 346U

- Aluminum Oxide on a D wt. paper backing
- Ideal for hand or machine sanding of many different materials, including woods, metals, paints, plastics and fiberglass



UPC (051144-)	Grade	W x L	Min./Case
051144-02119-2	36	9" x 11"	50/250
051144-02118-5	40		
051144-02117-8	50		50/500
051144-02116-1	60		
051144-02115-4	80		

See pages 67–72 for available accessories.



## 3M™ Flap Wheels

Coated Abrasives flap wheels are the ideal choice for light grinding, blending, graining and scale removal on a variety of metals. Abrasive material has been designed to wear away cleanly exposing fresh mineral. Available constructions include general purpose aluminum oxide or high performing 3M™ Ceramic Aluminum Oxide blend abrasive grain.

## 3M™ Flange Mounted Flap Wheel Selection Guide

		Product ID	Mineral	Diameter	Arbor Hole
				> 3" – 4-1/2"	5/8"
				> 4-1/2" – 6"	1"
				> 6" – 8"	1" or 1-1/4"
				> 8" – 10"	1-3/4" or 2"
				Grade	
Carbon Steel	Better	241E	Aluminum Oxide	50–320	
		244E	Aluminum Oxide	60–120	
Stainless Steel	Best	741A	Ceramic Aluminum Oxide Blend	50–120	

## 3M™ Flange Mounted Flap Wheels

### 3M™ Flap Wheels 241E/244E

- Aluminum Oxide on a flexible XE wt. cloth backing
- Long life and fast cut
- General purpose flap wheels at a value price




51742

UPC	Grade	Max. RPM	Dia. x W x AH	Qty./Case
051144-35113-8	60	6,100	6" x 1" x 1"	5
051144-35112-1	80			
051144-35111-4	100			
051144-35109-1	120	5,200	6" x 2" x 1"	
051144-35088-9	60			
051144-35086-5	80			

### 3M™ Flap Wheels 741A

- 3M™ Ceramic Aluminum Oxide blend abrasive grain on a durable X-wt. cloth backing
- Longer life and faster cut



51742

UPC	Grade	Max. RPM	Dia. x W x AH	Qty./Case
051144-82770-1	50	6,100	6" x 1" x 1"	5
051144-81986-7	60			
051144-81984-3	80			

See pages 67–72 for available accessories.

## 3M™ Spindle Mounted Flap Wheel Selection Guide

		Product ID	Mineral	Dia. ≤ 3"	
				T83 — 1/4" Straight	T84 — 1/4" x 20 Threaded
Carbon Steel	Better	241E	Aluminum Oxide	50–320	
		244D	Aluminum Oxide	60–120	
Stainless Steel	Best	747D	Ceramic Aluminum Oxide Blend	36–150	

### 3M™ Spindle Mounted Flap Wheels

#### 3M™ Mounted Flap Wheels 244D

- Aluminum Oxide
- General purpose flap wheel delivers consistent finish and uniform cut



UPC	Grade	Max. RPM	Dia. x W x Shk	Qty./Case
<b>T83; 1/4" Straight</b>				
051144-35475-7	60	30,000	1" x 1" x 1/4"	10
051144-35476-4	80			
051144-35477-1	120			
051144-14623-9	60	25,000	2" x 1" x 1/4"	
051144-14624-6	80			
051144-14625-3	120			
051144-14655-0	60	20,000	3" x 1" x 1/4"	
051144-14656-7	80			
051144-14657-4	120			
<b>T84; 1/4–20 Threaded</b>				
051144-35467-2	60	30,000	1" x 1" x 1/4–20 EXT	10
051144-35468-9	80			
051144-35469-6	120			
051144-14575-1	60	25,000	2" x 1" x 1/4–20 EXT	
051144-14576-8	80			
051144-14607-9	60			
051144-14608-6	80	20,000	3" x 1" x 1/4–20 EXT	

#### 3M™ Mounted Flap Wheels 747D

- 3M™ Ceramic Aluminum Oxide blend abrasive grain on a resin-bonded X-wt. cloth backing
- Includes a grinding aid for cooler running on stainless steel



UPC	Grade	Max. RPM	Dia. x W x Shk	Qty./Case
<b>T83; 1/4" Straight</b>				
051144-80761-1	60	30,000	1" x 1" x 1/4"	10
051144-80757-4	80			
051144-80753-6	P120			
051144-80763-5	60	25,000	2" x 1" x 1/4"	
051144-80759-8	80			
051144-80755-0	P120			
051144-80650-8	60	20,000	3" x 1" x 1/4"	
051144-80651-5	80			
051144-80652-2	P120			
<b>T84; 1/4–20 Threaded</b>				
051144-83271-2	60	25,000	2" x 1" x 1/4–20 EXT	10
051144-83268-2	80			
051144-83265-1	P120			
051144-83269-9	60	20,000	3" x 1" x 1/4–20 EXT	
051144-83267-5	80			
051144-83263-7	P120			

See pages 67–72 for available accessories.

### 3M™ Cartridge Rolls

**NEW!** 3M™ Cartridge Rolls 341D

- Aluminum Oxide on an X wt. cloth backing
- Long life and fast cut
- General purpose cartridge rolls at a value price



51754



UPC	Grade	Max. RPM	Dia. x L x CH	Qty./Case	
<b>Regular</b>					
051144-96959-3	P60	24,000	1/4" x 1" x 1/8"	100	
051144-14021-3	P80				
051144-96961-6	P120				
051144-96963-0	P180				
051144-96968-5	P60		1/4" x 1-1/2" x 1/8"		
051144-96969-2	P80				
051144-96971-5	P120				
051144-96973-9	P180				
051144-14024-4	P60		3/8" x 1" x 1/8"		
051144-14023-7	P80				
051144-14022-0	P120				
051144-97008-7	P180				
051144-97013-1	P60		3/8" x 1-1/2" x 1/8"		
051144-20417-8	P80				
051144-97015-5	P120				
051144-97017-9	P180				
051144-97041-4	P60	1/2" x 1" x 1/8"			
051144-97042-1	P80				
051144-97044-5	P120				
051144-14028-2	P60		1/2" x 1-1/2" x 1/8"		
051144-14027-5	P80				
051144-14026-8	P120				
051144-97059-9	P180				
051144-97162-6	P60	16,000	3/4" x 1-1/2" x 3/16"		
051144-97163-3	P80				
051144-97165-7	P120				
<b>Full Taper</b>					
051144-97239-5	P60	24,000	3/8" x 1" x 1/8"	100	
051144-97240-1	P80				
051144-97242-5	P120				
051144-97244-9	P180				
051144-97248-7	P60		3/8" x 1-1/2" x 1/8"		
051144-97249-4	P80				
051144-97251-7	P120				
051144-97257-9	P60				1/2" x 1" x 1/8"
051144-97259-3	P120				
051144-14034-3	P60		1/2" x 1-1/2" x 1/8"		
051144-14033-6	P80				
051144-14032-9	P120				
051144-97267-8	P180				

### 3M™ Cartridge Rolls 747D

- 3M™ Ceramic Aluminum Oxide blend abrasive grain on an X wt. cloth backing
- Long life and fast cut
- Contains grinding aid for cooler cutting on heat sensitive alloys



14378

UPC	Grade	Max. RPM	Dia. x L x CH	Qty./Case
<b>Regular</b>				
051144-80790-1	60	24,000	1/2" x 1-1/2" x 1/8"	100
051144-80796-3	80			
051144-80792-5	P120			
<b>Full Taper</b>				
051144-80786-4	60	24,000	1/2" x 1-1/2" x 1/8"	100
051144-80787-1	80			
051144-80788-8	P120			

See pages 67–72 for available accessories.

**NEW!** 3M™ Cross and Square Pads

Cross pads are used for close tolerance polishing of small radii and channels, deburring the ends and insides of tubing, and other special applications.

Square pads are ideal for fast grinding/blending of channels, fillets, and corners plus spotting on flat surfaces. As the square pads rotate the corners exerting a fast biting action they gradually wear down exposing fresh abrasive material.

For even more aggressive cut rates and durability, try 3M™ Cross and Square Pads 747D containing 3M™ Ceramic Aluminum Oxide blend abrasive grain.

**3M™ Square Pads 341D**

- Premium Aluminum Oxide on an X wt. cloth backing
- Long life and fast cut
- General purpose square pads at a value price



UPC	Grade	Max RPM	Size	Min./Case
<b>1/4"– 20 Eyelet</b>				
051141-27353-2†	60	12,000	2" x 2" x 3/8"	50/100
051141-27354-9†	80			
051141-27355-6†	P120		2" x 2" x 1/2"	
051141-27350-1	60			
051141-27351-8	80	9,000	3" x 3" x 1/4"	
051141-27352-5	P120			
051144-97723-9			60	
051141-27356-3†	80		3" x 3" x 1/2"	
051141-27357-0†	60			
051141-27358-7†	P120			

† Made-to-Order

**3M™ Square Pads 747D**

- 3M™ Ceramic Aluminum Oxide blend abrasive grain on an X wt. cloth backing
- Contains grinding aid for cooler cutting on heat sensitive alloys



UPC	Grade	Max RPM	Size	Qty./Case
<b>1/4"– 20 Eyelet</b>				
051141-27359-4†	60	12,000	2" x 2" x 1/2"	100
051141-27360-0†	80			
051141-27361-7†	P120		2" x 2" x 3/8"	
051141-27362-4†	60			
051141-27363-1†	80	9,000	3" x 3" x 1/2"	
051141-27364-8†	P120			
051141-27365-5†	60			
051141-27366-2†	80			
051141-27367-9†	P120			

† Made-to-Order

See pages 67–72 for available accessories.

**3M™ Cross Pads 341D**

- Premium Aluminum Oxide on an X wt. cloth backing
- Long life and fast cut
- General purpose square pads at a value price



UPC	Grade	Max RPM	Size	Min./Case	
<b>8 or 10 Ply; 8"– 32 Eyelet</b>					
051141-27368-6	60	24,000	1" x 1" x 3/8"	50/100	
051141-27369-3	80				
051141-27370-9†	P120		1-1/2" x 1-1/2" x 1/2"		
051141-27371-6	60				
051141-27372-3	80				
051141-27373-0	P120				
<b>10 Ply; 8"– 32 Eyelet</b>					
051141-27374-7	60	18,000	2" x 2" x 1/2"		
051141-27375-4	80				
051141-27376-1	P120		2" x 2" x 3/4"		
051141-27377-8	60				
051141-27378-5	80				
051141-27379-2	P120				
051144-97750-5	60		2-1/2" x 2-1/2" x 3/4"		
<b>8 or 10 Ply; 1/4"– 20 Eyelet</b>					
051141-27380-8	60	18,000	3" x 3" x 1"		
051141-27381-5	80				
051141-27382-2†	P120		3" x 3" x 1-1/2"		
051144-97760-4	60				
051144-97766-6	80	15,000	3-1/2" x 3-1/2" x 1-1/2"		
051144-97768-0	60	12,000	4" x 4" x 1"		
051144-98880-2		10,000	5" x 5" x 1-1/2"		
051144-97783-3		9,000	6" x 6" x 1-1/2"		

† Made-to-Order

**3M™ Cross Pads 747D**

- 3M™ Ceramic Aluminum Oxide blend abrasive grain on an X wt. cloth backing
- Contains grinding aid for cooler cutting on heat sensitive alloys



UPC	Grade	Max RPM	Size	Qty./Case
<b>8 Ply; 1/4"– 20 Eyelet</b>				
051141-20368-3	60	24,000	1-1/2" x 1-1/2" x 1/2"	100
051141-20369-0	80			
051141-20372-0	P100			
051141-20379-9	P120	18,000	2" x 2" x 1/2"	
051141-20380-5	60			
051141-20367-6	P100			
051141-20375-1	80			

† Made-to-Order

### 3M™ Bands

#### 3M™ Bands 341D

- Aluminum Oxide on and X wt. cloth backing
- Fast cut and long life
- General purpose evenrun bands at a value price




#### 3M™ Bands 747D

- 3M™ Ceramic Aluminum Oxide blend abrasive grain on an X wt. cloth backing
- Long life and fast cut
- Contains grinding aid for cooler cutting on heat sensitive alloys



UPC	Grade	Max. RPM	Dia. x W	Qty./Case
051144-40243-4	P80	23,000	1/4" x 1/2"	100
051144-97428-3	P120			
051144-27446-7	P36	30,000	1/2" x 1/2"	
051144-40228-1	P60			
051144-40227-4	P80			
051144-40252-6	P120	15,000	1/2" x 1"	
051144-97458-0	P36			
051144-40225-0	P60			
051144-40224-3	P80			
051144-11973-8	P120	17,000	3/4" x 1"	
051144-11976-9	P36			
051144-40221-2	P60			
051144-40220-5	P80			
051144-40219-9	P120	10,000	3/4" x 1-1/2"	
051144-11977-6	P36			
051144-40241-0	P80	18,000	1" x 1"	
051144-40214-4	P36			
051144-40211-3	P60			
051144-40210-6	P80			
051144-40208-3	P120	10,000	1" x 1-1/2"	
051144-40207-6	P36			
051144-11980-6	P60	14,000	1-1/2" x 1"	
051144-40205-2	P80			
051144-40203-8	P36	10,000	1-1/2" x 1-1/2"	
051144-40202-1	P60			
051144-40200-7	P36			
051144-40197-0	P60			
051144-40196-3	P80	8,000	1-1/2" x 2"	
051144-40274-8	P120			
051144-40267-0	P60	11,000	2" x 1"	
051144-40192-5	P60			
051144-40187-1	P36	6,000	2" x 2"	
051144-40184-0	P60			
051144-40183-3	P80	3,000	3" x 3"	
051144-40178-9	P36			
051144-40175-8	P60			
051144-40174-1	P80			
051144-40172-7	P120			50

UPC	Grade	Max. RPM	Dia. x W	Qty./Case
051144-80765-9	50	15,000	1/2" x 1"	100
051144-80769-7	60			
051144-80773-4	80			
051144-80766-6	50	18,000	1" x 1"	
051144-80770-3	60			
051144-80774-1	80			
051144-80782-6	P120	11,000	2" x 1"	
051144-80771-0	60			
051144-80775-8	80			
051144-80783-3	P120			

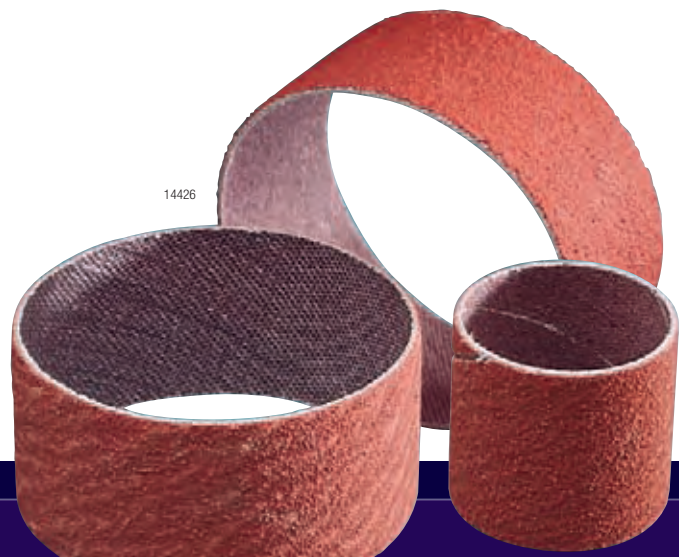

See pages 67–72 for available accessories.

## Scotch-Brite™ Discs























The Scotch-Brite™ brand promise of making tough jobs easier means you can achieve a burr-free, paintable finish in fewer steps without damaging the base material. The non-woven, open web, durable construction is designed to resist loading and greatly increase the life of the disc. As a result you will not have to change it as often. However, when you do change your disc, the Roloc™ attachment makes it fast and easy.

## Scotch-Brite™ Disc Selection Guide

	Light Grinding	Blending	Deburring	Finishing	Cleaning	Coating Removal
Increased Loading Resistance	SC, PD	SC, PD	SC	PD, HS, C&F	Bristle, HS, C&F	Bristle, HS
Starting Point	SL	SL	SE	SC	PD	C&S
Increased Wear Resistance	LGB	LGB	LGB	SL	SC	C&S XT

Legend					
PD	PD Surface Conditioning Discs	SE	SE Surface Conditioning Discs	C&F	Clean and Finish Discs
LGB	Light Grinding and Blending Discs	SL	SL Surface Conditioning Discs	C&S	Clean and Strip Discs
SC	SC Surface Conditioning Discs	HS	High Strength Discs	C&S XT	Clean and Strip XT Discs

## Scotch-Brite™ Disc Attachment Guide

	Attachments			
PD Surface Conditioning Discs				
	Roloc™ TR	Hook-and-Loop		
SC Surface Conditioning Discs				
	Roloc™ TR	Roloc™ TP	Roloc™ TSM	Hook-and-Loop
SE Surface Conditioning Discs				
	Roloc™ TR	Hook-and-Loop		
SL Surface Conditioning Discs				
	Roloc™ TR	Hook-and-Loop	TN Quick Change	
Light Grinding & Blending Discs				
	Roloc™ TR	Hook-and-Loop	TN Quick Change	
Bristle Discs				
	TN Quick Change			
Clean & Finish Discs				
	Hookit™			
Clean & Strip Discs				
	Spindle Mount			
Clean & Strip XT Discs				
	TN Quick Change	Roloc™ TR		
High Strength Discs				
	Spindle Mount	Roloc™ TP	Roloc™ TSM	

Roloc™ TR, TP, TS and TSM are plastic button attachments

See pages 67–72 for available accessories.




## Scotch-Brite™ Discs — Roloc™

### Scotch-Brite™ Roloc™ SC Surface Conditioning Discs

- Scotch-Brite surface conditioning non-woven web provides a burr-free decorative finish
- Removes grind marks, rust and coatings
- Grade: A VFN – Blue; A MED – Maroon; A CRS – Brown



159116


UPC	Grade	Max. RPM	Diameter	Min./Case
<b>Roloc TP (Metal Button)</b> 				
048011-13237-2	A CRS	25,000	2"	50/200
048011-13241-9		18,000	3"	25/100
048011-13243-3†	A VFN			
<b>Roloc TR (Plastic Button)</b> 				
048011-15393-3	A CRS	30,000	1"	200
048011-15392-6	A MED			
048011-15391-9	A VFN			
048011-15568-5†	A SFN	25,000	1-1/2"	50/200
048011-08764-1	A CRS			
048011-08765-8	A MED			
048011-08766-5	A VFN			
048011-08767-2†	A SFN			
048011-05528-2	A CRS			
048011-05527-5	A MED	18,000	2"	25/100
048011-05522-0	A SFN			
048011-05523-7	A VFN			
048011-05532-9	A CRS			
048011-05531-2	A MED	12,000	3"	25/100
048011-05529-9	A SFN			
048011-05530-5	A VFN			
048011-12954-9	A CRS			
048011-12953-2	A MED	4"		100
048011-12951-8†	A SFN			25/100
048011-12952-5	A VFN			
<b>Roloc TSM (Metal Button)</b> 				
048011-13249-5†	A CRS	30,000	1-1/2"	50/200
048011-25775-4				
048011-25774-7†				
048011-25773-0†	A VFN	25,000	2"	25/100
048011-25765-5	A CRS			
048011-25764-8	A MED			
048011-25770-9	A VFN			
048011-25767-9	A CRS	18,000	3"	25/100
048011-13257-0	A MED			
048011-25766-2	A VFN			
048011-13258-7	A SFN			
048011-25780-8	A CRS	12,000	4"	100
048011-13259-4	A MED			
048011-13260-0†	A VFN			

† Made-to-Order


See pages 67–72 for available accessories.

### Scotch-Brite™ Roloc™ SE Surface Conditioning Discs

- Great for edge deburring applications

UPC	Grade	Max. RPM	Diameter	Min./Case
<b>Roloc TR (Plastic Button)</b> 				
048011-18081-6	A CRS	25,000	2"	50/200
048011-18471-5	A MED			
048011-30005-4	A FIN			
048011-18082-3	A CRS	18,000	3"	25/100
048011-18472-2	A MED			
048011-93453-2	A FIN			

## Compare Best Options for Quality Scotch-Brite™ Surface Conditioning Discs

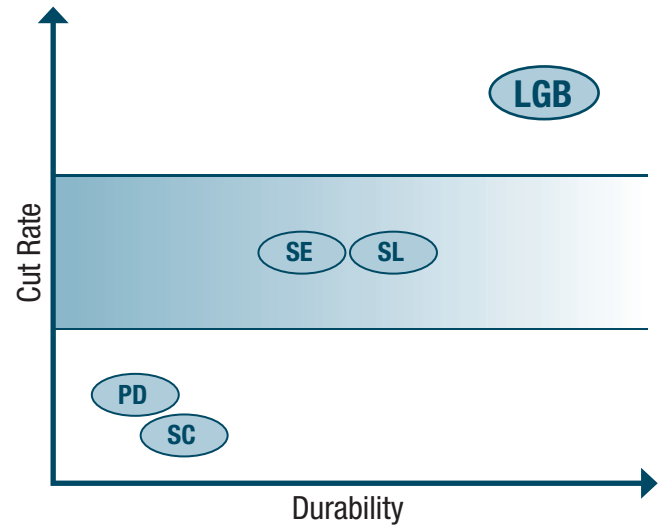

511837



## Scotch-Brite™ Discs — Roloc™ (cont.)

### Scotch-Brite™ Roloc™ SL Surface Conditioning Discs

- Cuts fast without sacrificing finish
- Can last up to twice as long as other surface conditioning discs
- Delivers outstanding value and productivity improvement



UPC	Grade	Max. RPM	Diameter	Min./Case
<b>Roloc TR (Plastic Button)</b>				
048011-33797-5	A CRS SD	25,000	2"	200
048011-33795-1	A CRS HD			
048011-33793-7	A CRS			50/200
048011-33791-3	A MED			
048011-33796-8	A CRS SD	18,000	3"	100
048011-33794-4	A CRS HD			
048011-33792-0	A CRS			
048011-33790-6	A MED			

Many other sizes available upon request.

### Scotch-Brite™ Roloc™ Light Grinding and Blending Discs

- 3M™ Ceramic Aluminum Oxide blend abrasive grain
- Resists edge wear
- Great for light grinding, deburring and blending on all metals



UPC	Grade	Max. RPM	Diameter	Qty./Case
<b>Roloc TR (Plastic Button)</b>				
048011-60355-1	A CRS SD	25,000	2"	50/200
048011-60354-4	A CRS HD			
048011-60357-5	A CRS SD	18,000	3"	25/100
048011-60356-8	A CRS HD			
048011-60359-9	A CRS SD	12,000	4"	
048011-60358-2	A CRS HD			
<b>Roloc TSM (Metal Button)</b>				
048011-60375-9	A CRS SD	25,000	2"	50/200
048011-60374-2	A CRS HD			
048011-60377-3	A CRS SD	18,000	3"	100
048011-60376-6†	A CRS HD			

† Made-to-Order

### Scotch-Brite™ Roloc™ PD Surface Conditioning Discs

- Lofty, open non-woven abrasive disc
- Resistant to loading on soft metals and oily surfaces

UPC	Grade	Max. RPM	Diameter	Min./Case
<b>Roloc TR (Plastic Button)</b>				
048011-60191-5†	A CRS	25,000	2"	50/200
048011-24287-3	A MED			
048011-60192-2	A CRS	18,000	3"	25/100
048011-24295-8	A MED			


† Made-to-Order

### Scotch-Brite™ Roloc™ Clean and Strip Discs

- Aggressively removes paint, rust and seam sealers
- Open web construction for cool running and resistance to loading and smearing
- Faster cutting than wire brushes and wheels to increase production



UPC	Grade	Max. RPM	Size	Qty./Case
048011-14784-0	S XCS	8,000	4" x 1"	10
048011-14780-2			4" x 1" x 1/4"	



Threaded Shaft →

3M™ Roloc™ Disc Pad →

3M™ Roloc™ Disc or Wheel →

See pages 67–72 for available accessories.



## Scotch-Brite™ Discs — Roloc™ (cont.)


### Scotch-Brite™ Roloc™ Clean and Strip XT Disc

- Silicon Carbide mineral
- Durable, rigid, long lasting
- Aggressive, open-web disc for cleaning welds, removing rust and paint

**NEW!**  
to Catalog






524504

UPC	Grade	Max. RPM	Diameter	Min./Case
<b>Roloc TR (Plastic Button)</b> 				
048011-30147-1	S XCS	18,000	2" x NH	60
048011-30016-0		15,000	3" x NH	40

### **NEW!** Scotch-Brite™ Roloc™ HS Blend and Finish

- Aluminum Oxide mineral
- New high strength nonwoven with superior durability and cut
- Great flexibility and conformability for weld burn removal, light deburring, blending, finishing and rust removal




UPC	Grade	Max. RPM	Diameter	Min./Case
<b>Roloc TR (Plastic Button)</b> 				
048011-64190-4	A MED	18,000	2"	200
048011-64206-2		15,000	3"	100
<b>Roloc TSM (Metal Button)</b> 				
048011-64213-0	A MED	18,000	2"	200
048011-64220-8		15,000	3"	100

### Scotch-Brite™ Roloc™ Bristle Discs

- Efficiently clean and strip many substances from metal surfaces without damaging the work piece
- An operator can quickly and easily achieve a quality, consistent finish with light pressure



431922

UPC	Grade	Color	Max. RPM	Size	Min./Case
<b>Roloc TR (Plastic Button)</b> 					
048011-18698-6	50	Green	30,000	1"	20/80
048011-18706-8	80	Yellow			
048011-18710-5	120	White			
048011-18730-3	50	Green	25,000	2"	10/40
048011-18732-7	80	Yellow			
048011-18733-4	120	White			
048011-18734-1	50	Green	15,000	3"	
048011-18736-5	80	Yellow			
048011-18737-2	120	White			

### Scotch-Brite™ Roloc™ Body Man's Bristle Disc

- Contains 3M™ Ceramic Aluminum Oxide blend abrasive grain
- Removes high loading materials fast and doesn't load
- Great for removing rubberized undercoating, seam sealer, rust and paint
- Maintains high quality product life



461797

UPC	Grade	Max. RPM	Diameter	Min./Case
051131-07540-5	36	30,000	1"	6/36
051131-07536-8		25,000	2"	4/24
051131-07537-5		18,000	3"	3/18

### Scotch-Brite™ Roloc™ Coating Removal Discs


- Extra coarse grade Silicon Carbide
- Heavy duty, semi-open web used to clean rust and paint
- Color: Black




UPC	Grade	Max. RPM	Diameter	Qty./Case
048011-18364-0	S XCS	18,000	2"	60
048011-18350-3		15,000	3"	40
048011-18470-8		11,000	4"	

### Scotch-Brite™ Roloc™ EXL Unitized Wheels

- Strong, efficient products for edge deburring and finishing
- Used with 3M™ Roloc™ or 3M™ Roloc™+ holder pads on a straight shaft or right-angle tool



179831

UPC	Grade	Max. RPM	Size	Qty./Case
<b>Roloc TR (Plastic Button)</b> 				
048011-17185-2	2A MED	22,100	2"	60
048011-17183-8	2S FIN			
048011-17190-6	6A MED			
048011-17192-0	8A MED	15,100	3"	40
048011-17186-9	2A MED			
048011-17184-5	2S FIN			
048011-17191-3	6A MED			
048011-17193-7	8A MED			

See pages 67–72 for available accessories.

## Scotch-Brite™ Discs — Hook-and-Loop

### Scotch-Brite™ SC Surface Conditioning Discs (Hook-and-Loop)

- Aluminum Oxide
- Great general purpose surface conditioning disc
- For finishing, cleaning, and light deburring
- Attach and remove easily to 3M™ Hook-and-Loop Backup Pads
- Use with right angle and random orbital tools



UPC	Grade	Color	Max. RPM	Diameter	Min./Case
<b>Hook-and-Loop</b>					
048011-07458-0	A CRS	Brown	23,000	2"	50/200
048011-07459-7	A MED	Maroon			
048011-04276-3	A VFN	Blue			
048011-04127-8†	A SFN	Gray			
048011-04120-9	A CRS	Brown	20,000	3"	25/100
048011-04124-7	A MED	Maroon			
048011-04277-0	A VFN	Blue			
048011-04129-2	A SFN	Gray			
048011-07450-4	A CRS	Brown	13,000	4"	100
048011-07451-1	A MED	Maroon			
048011-04278-7	A VFN	Blue			
048011-04129-2	A SFN	Gray			
048011-14101-5	A CRS	Brown	13,000	4-1/2"	50
048011-27671-7	A CRS	Brown			10
048011-27672-4	A MED	Maroon			50
048011-14100-8	A MED	Maroon			50
048011-14099-5	A VFN	Blue	10,000	5"	50
048011-14102-2	A SFN	Gray			
048011-27674-8	A CRS	Brown			
048011-00750-2	A CRS	Brown			
048011-27675-5	A MED	Maroon	10,000	5"	50
048011-00643-7	A MED	Maroon			
048011-27676-2	A VFN	Blue			
048011-04303-6	A VFN	Blue			
048011-00647-5	A SFN	Gray	8,000	6"	50
048011-03927-5	A CRS	Brown			
048011-03928-2	A MED	Maroon			
048011-04304-3	A VFN	Blue			

† Made-to-Order

### Scotch-Brite™ SC Surface Conditioning Discs (Hook-and-Loop) (cont.)

UPC	Grade	Color	Max. RPM	Diameter	Min./Case	
<b>Hook-and-Loop</b>						
048011-27677-9	A CRS	Brown	6,000	7"	10	
048011-00751-9					25	
048011-27678-6	A MED	Maroon			7"	10
048011-00645-1						25
048011-27679-3	A VFN	Blue		7"	10	
048011-04305-0					25	
048011-00648-2	A SFN	Gray		6,000	8"	25
048011-00752-6	A CRS	Brown				
048011-00670-3	A MED	Maroon				
048011-04306-7	A VFN	Blue				
048011-00649-9†	A SFN	Gray				
048011-13325-6†	A CRS	Brown	600			
048011-13100-9†	A MED	Maroon				
048011-13099-6†	A VFN	Blue				
048011-18385-5†	A SFN	Gray				


† Made-to-Order

### Scotch-Brite™ SE Surface Conditioning Discs (Hook-and-Loop)

- High cutting surface conditioning disc great for edge deburring applications

UPC	Grade	Max. RPM	Diameter	Min./Case
<b>Hook-and-Loop</b>				
048011-18021-2	A CRS	13,000	4"	100
048011-18475-3†	A MED		4-1/2"	50
048011-18079-3	A CRS			
048011-18476-0	A MED	10,000	5"	50
048011-18080-9	A CRS			
048011-18919-2†	A MED			
048011-17866-0	A CRS	6,000	7"	25
048011-18477-7	A MED		7"	
048011-30003-0†	A FIN			8"
048011-17239-2	A CRS			
048011-93348-1†	A CRS	600	48"	2
048011-60392-6†	A FIN			

† Made-to-Order

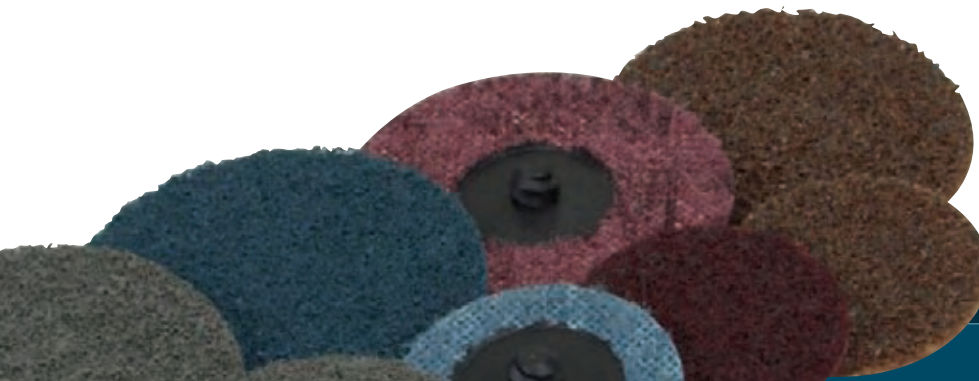

See pages 67–72 for available accessories.

## Scotch-Brite™ Discs — Hook-and-Loop (cont.)

### Scotch-Brite™ SL Surface Conditioning Discs (Hook-and-Loop)

- Aluminum Oxide
- Highly durable product for aggressive applications
- Cuts fast without sacrificing finish and can work twice as long as other standard surface conditioning discs

UPC	Grade	Max. RPM	Diameter	Qty./Case
048011-33813-2†	A CRS SD	13,000	4"	100
048011-33810-1†	A CRS HD			
048011-33807-1†	A CRS			25/100
048011-33804-0†	A MED	10,000	4-1/2"	100
048011-33814-9	A CRS SD			
048011-33811-8	A CRS HD			
048011-33808-8	A CRS			50
048011-33805-7	A MED			
048011-33815-6†	A CRS SD			
048011-33812-5†	A CRS HD	6,000	5"	25
048011-33806-4†	A CRS HD			
048011-33809-5†	A MED			
048011-33789-0	A CRS SD			25
048011-33788-3	A CRS HD			
048011-33787-6	A CRS			
048011-33786-9	A MED			

† Made-to-Order

### Scotch-Brite™ Clean and Finish Discs (Hook-and-Loop)

- Flexible web for finishing, blending and polishing
- Conformability allows access to hard-to-reach areas



UPC	Grade	Max. RPM	Diameter	Qty./Case
048011-16001-6	A VFN	5,000	5"	100
048011-00661-1		4,000	6"	
048011-30037-5		1,900	11-1/4"	25



### Scotch-Brite™ Light Grinding and Blending Center Hole Disc (Hook-and-Loop)



- Durable, non-woven 3M™ Ceramic Aluminum Oxide blend abrasive grain product used for light grinding applications providing burr-free finish
- For use with the 3M™ Center Pin Backup Pad or 3M™ Fibre Disc Hubs, Face Plates and Retainer Nuts
- Super Duty: Blue
- Heavy Duty: Maroon

UPC	Grade	Max. RPM	Dia. x Ctr. Hole	Min./Case
<b>Center Hole</b>				
048011-60363-6	A CRS SD	10,000	4-1/2"	50
048011-60333-9†			4-1/2" x 7/8"	
048011-60332-2†	A CRS HD		5"	
048011-60343-8	A CRS SD		5" x 7/8"	
048011-60341-4	A CRS HD	6,000	7"	25
048011-60336-0	A CRS HD		7" x 7/8"	
048011-60346-9	A CRS SD			
048011-60344-5	A CRS SD	6,000	7" x 7/8"	25
048011-60347-6	A CRS HD			
<b>Hook-and-Loop</b>				
048011-60335-3	A CRS HD	10,000	4-1/2"	50
048011-60342-1			5"	
048011-60345-2			6,000	7"

† Made-to-Order

### Scotch-Brite™ Coating Removal Discs (Hook-and-Loop)

- Silicon Carbide – Extra Coarse
- Made for right-angle tools from aggressive Clean & Strip web
- Non-loading design ideal for removing rust and coatings
- Mount on Hook-and-Loop Disc Pad Holders




UPC	Grade	Max. RPM	Diameter	Min./Case
<b>Hook-and-Loop</b>				
048011-18424-1	S XCS	12,000	4-1/2"	4/20
048011-18482-1*				40
048011-18355-8		10,000	5"	4/20
048011-18483-8*				40
048011-18358-9		6,000	7"	2/10
048011-18485-2*				20

\* Bulk

3M™ Disc Holder (Hook-and-Loop)

Surface Conditioning Disc



See pages 67–72 for available accessories.

## Scotch-Brite™ Discs — TN Quick Change

### Scotch-Brite™ Light Grinding and Blending Discs TN Quick Change



- 3M™ Ceramic abrasive grain
- Aggressive, long life, Scotch-Brite finish
- Resistant to edge wear
- Super Duty: Blue
- Heavy Duty: Maroon

UPC	Grade	Max. RPM	Diameter x AH	Qty./Case
048011-60349-0	A CRS SD	13,000	4-1/2" x 5/8-11*	50
048011-60348-3	A CRS HD			
048011-60351-3	A CRS SD	12,000	5" x 5/8-11*	
048011-60350-6	A CRS HD			
048011-60353-7	A CRS SD	8,600	7" x 5/8-11*	25
048011-60352-0	A CRS HD			

\* Quick Change Tinneman Nut Attachment

### Scotch-Brite™ Clean and Strip XT Disc, TN Quick Change

- Silicon Carbide – Extra Coarse
- Mounts quickly to 4-1/2" and 7" grinders
- Tough open web, ideal for weld cleaning and removing paint and coatings
- Use with TN Quick Change back up pad or fibre disc hub and face plate



UPC	Grade	Max. RPM	Dia. x Thk. X AH	Min./Case
048011-33194-2	S XCS	13,300	4-1/2" x 1/2" x 5/8-11*	10
048011-33196-6		8,600	7" x 1/2" x 5/8-11*	5

\* Quick Change Tinneman Nut Attachment

### Scotch-Brite™ Bristle Discs

- Easily remove paint, stains, adhesives, weld burn, rust and other surface contaminants from large areas



UPC	Grade	Color	Max. RPM	Diameter x AH	Qty./Case
048011-33054-9	36	Brown	12,000	4-1/2" x 5/8-11 INT	10
048011-24241-5	50	Green			
048011-24242-2	80	Yellow			
048011-24243-9	120	White			



360837

## Scotch-Brite™ Discs — Spindle Mount

### Scotch-Brite™ High Strength Discs

- Aluminum Oxide
- Very conformable discs, ideal for light deburring, cleaning and finishing



14463

UPC	Grade	Max. RPM	Dia. x Ctr. Hole	Min./Case
<b>Use with Mandrel 933</b>				
048011-05629-6†	A MED	4,000	6" x 1/4"	100
048011-27748-6	A VFN			10/40
048011-00666-6				100
<b>Use with Mandrel 934</b>				
048011-27745-5	A MED	4,000	6" x 1/2"	10/40
048011-04188-9				100
048011-27747-9	A VFN			10/40
048011-00665-9				100
048011-93477-8†	A MED	3,000	8" x 1/4"	50
048011-00673-4	A VFN			
048011-27746-2	A MED	3,000	8" x 1/2"	10/20
048011-03992-3				50
048011-27749-3	A VFN			10/20
048011-00672-7				50

† Made-to-Order

### Scotch-Brite™ Clean and Strip Discs

- Silicon Carbide – Extra Coarse
- Tough open web, ideal for weld cleaning and removing paint and coatings



51717

UPC	Grade	Max. RPM	Dia. x Ctr. Hole	Qty./Case
<b>Use with Mandrel 934</b>				
048011-00941-4	S XCS	6,000	4" x 1/2"	25
048011-00948-3		4,000	6" x 1/2"	15
048011-00957-5		3,000	8" x 1/2"	

See pages 67–72 for available accessories.

## Scotch-Brite™ Surface Conditioning Belt Selection Guide

		Blending	Deburring	Finishing	Cleaning
Stainless Steel, Carbon Steel, Titanium, Nickel Alloy	Good	SE	SC	SE	SE
	Better	SC	DF	SC	DF
	Best	DF	SE	DF	SC
A/L, Copper, Brass (Soft Metals), Non-Ferrous Metals	Good	SC	SC	SC	SC
	Better	DF	DF	DF	DF
	Best	PD	PD	PD	PD

Legend			
DF	DF Surface Conditioning Belts	SC	SC Surface Conditioning Belts
PD	PD Surface Conditioning Belts	SE	SE Surface Conditioning Belts



## Availability Guide

3M ID	Backing	A CRS	A MED	A FIN	A VFN	SFN
DF	Low Stretch	●	●	●		
SC	Scrim	●	●		●	●
	Low Stretch	●	●		●	●
	Film Backed	●	●		●	●
SE	Scrim	●	●	●		
	Low Stretch	●	●	●		
	Film Backed	●	●			
PD	Scrim	●	●			
	Low Stretch	●				
	Film Backed	●				

SCOTCH-BRITE™ BELTS RECOMMENDED OPERATING SPEEDS	
Application	Recommended SFPM
Decorative Finishing	500–3,000 SFPM
Deburring	5,000–6,500 SFPM
Cleaning and Conditioning	2,000–5,000 SFPM
Oxide Removal	4,500–6,500 SFPM

Maximum Operating Speed: 6,500 SFPM  
SFPM = Surface Feet Per Minute


**ATTENTION:** Belts are available in other grades and sizes. If you need a specific belt not listed, contact your 3M Sales Specialist or 3M Authorized Distributor.

See pages 67–72 for available accessories.

## Scotch-Brite™ Surface Conditioning Belts

### Scotch-Brite™ SE Surface Conditioning Belt

- Coarse, tough, aggressive non-woven belt for heavy duty deburring and finishing
- Reinforced backing offers good flexibility
- Abrasive mineral: coarse grade aluminum oxide
- Color: Brown/blue




UPC	Grade	W x L	Qty./Case
<b>Backstand</b>			
048011-18495-1	A CRS	1/4" x 18"	20
048011-18496-8†		1/4" x 24"	
048011-18087-8		1/2" x 18"	
048011-18088-5		1/2" x 24"	
048011-19697-8		3/4" x 18"	
048011-18089-2		3-1/2" x 15-1/2"	

† Made-to-Order

### Scotch-Brite™ SC Surface Conditioning Belts

- Premium Scotch-Brite™ surface conditioning non-woven web
- Designed for cleaning, finishing and light deburring



UPC	Grade	Color	W x L	Qty./Case
<b>Portable, Benchtop and Backstand</b>				
048011-13290-7†	A CRS	Brown	1/4" x 18"	20
048011-14276-0	A MED	Maroon		
048011-13230-3†	A VFN	Blue		
048011-13132-0	A CRS	Brown	1/4" x 24"	
048011-13131-3	A MED	Maroon		
048011-13287-7	A VFN	Blue		
048011-08858-7	A CRS	Brown	1/2" x 18"	
048011-08857-0	A MED	Maroon		
048011-08856-3	A VFN	Blue		
048011-05741-5	A CRS	Brown	1/2" x 24"	
048011-03998-5	A MED	Maroon		
048011-04299-2	A VFN	Blue		
048011-13639-4	A CRS	Brown	3/4" x 18"	
048011-15899-0	A MED	Maroon		
048011-14543-3	A VFN	Blue		

### Scotch-Brite™ SC Surface Conditioning Belts (cont.)

UPC	Grade	Color	W x L	Qty./Case	
<b>Portable, Benchtop and Backstand</b>					
048011-14278-4	A CRS	Brown	1" x 18"	10	
048011-14398-9†	A MED	Maroon			
048011-17517-1†	A VFN	Blue			
048011-04189-6	A MED	Maroon	1" x 42"		
048011-04190-2	A VFN	Blue			
048011-08913-3†	A MED	Maroon	1" x 132"		5
048011-08915-7	A MED	Maroon	2" x 48"	10	
048011-04295-4	A VFN	Blue			
048011-08883-9†	A CRS	Brown	2" x 72"		
048011-00580-5	A MED	Maroon			
048011-00579-9	A VFN	Blue			
048011-03999-2	A MED	Maroon	2" x 132"		5
048011-04297-8	A VFN	Blue			
048011-05022-5	A CRS	Brown	2-3/4" x 15-1/2"	10	
048011-05227-4	A MED	Maroon			
048011-05820-7	A CRS	Brown	3" x 10-11/16"		
048011-05783-5	A MED	Maroon			
048011-09650-6	A VFN	Blue			
048011-14284-5†	A CRS	Brown	3" x 18"		
048011-14285-2	A MED	Maroon			
048011-14550-1	A VFN	Blue	3" x 24"		
048011-08880-8	A CRS	Brown			
048011-00583-6	A MED	Maroon			
048011-04298-5	A VFN	Blue	3" x 132"	5	
048011-05023-2	A CRS	Brown			
048011-00568-3	A MED	Maroon	3" x 132"		
048011-04289-3	A VFN	Blue			
048011-05016-4	A CRS	Brown			
048011-05228-1	A MED	Maroon	3-1/2" x 15-1/2"	10	
048011-05643-2	A VFN	Blue			
048011-08882-2†	A CRS	Brown	4" x 24"		
048011-00585-0†	A MED	Maroon			
048011-05018-8†	A CRS	Brown	4" x 132"		5
048011-00570-6	A MED	Maroon			
048011-04281-7	A VFN	Blue			
048011-05019-5	A CRS	Brown	6" x 48"		
048011-00590-4	A MED	Maroon			
048011-04283-1	A VFN	Blue			

† Made-to-Order

See pages 67–72 for available accessories.

## Scotch-Brite™ Surface Conditioning Belts (cont.)

### Scotch-Brite™ Durable Flex (DF) Surface Conditioning Belt

**NEW!**



517724

- Durable Flex belt has great edge durability
- Aggressive and long lasting non-woven belt for deburring, finishing, blending and cleaning
- The reinforced low-stretch backing offers good flexibility

UPC	Grade	Color	W x L	Qty./Case
048011-64472-1	A CRS	Brown	1/4" x 18"	20
048011-64455-4	A MED	Maroon		
048011-64464-6	A FIN	Green		
048011-64473-8	A CRS	Brown	1/4" x 24"	
048011-64456-1	A MED	Maroon		
048011-64465-3	A FIN	Green		
048011-64474-5	A CRS	Brown	1/2" x 12"	
048011-64457-8	A MED	Maroon		
048011-64466-0	A FIN	Green		
048011-64475-2	A CRS	Brown	1/2" x 18"	
048011-64458-5	A MED	Maroon		
048011-64467-7	A FIN	Green		
048011-64476-9	A CRS	Brown	1/2" x 24"	
048011-64459-2	A MED	Maroon		
048011-64468-4	A FIN	Green		
048011-64477-6	A CRS	Brown	3/4" x 18"	
048011-64460-8	A MED	Maroon		
048011-64469-1	A FIN	Green		
048011-64489-9	A CRS	Brown	2-3/4" x 15-1/2"	10
048011-64482-0	A MED	Maroon		
048011-64486-8	A CRS	Brown	3" x 10-11/16"	
048011-64480-6	A MED	Maroon		
048011-64488-2	A CRS	Brown	3" x 18"	
048011-64483-7	A MED	Maroon		
048011-64484-4	A FIN	Green		
048011-64487-5	A CRS	Brown	3" x 24"	
048011-64481-3	A MED	Maroon		
048011-64485-1	A FIN	Green		
048011-64479-0	A CRS	Brown	3" x 132"	5
048011-64462-2	A MED	Maroon		
048011-64471-4	A FIN	Green		
048011-64478-3	A CRS	Brown	3-1/2" x 15-1/2"	10
048011-64461-5	A MED	Maroon		
048011-64470-7	A FIN	Green		

### Scotch-Brite™ PD Surface Conditioning Belt

**NEW!**  
to Catalog

- Aluminum Oxide abrasive mineral
- Open woven belt resistant to loading on soft and/or oily materials
- Reinforced backing offers good flexibility


UPC	Grade	Color	W x L	Qty./Case
048011-92126-6	A CRS	Brown	Belt sizes made to order. Specify UPC, grade and belt size (W" x L"). Belts wider than 25" require multiple splices.	Determined by belt size.
048011-92125-9				
048011-92127-3				
048011-92259-1	A MED	Maroon		

See pages 67–72 for available accessories.

**ATTENTION: Belts are available in other grades and sizes. If you need a specific belt not listed, contact your 3M Sales Specialist or 3M Authorized Distributor.**

## Convolute Wheels Selection Guides

Scotch-Brite™ Convolute Wheel performance differences can be attributed to mineral (aggressiveness) and density (hardness). The combination of these two characteristics and subtle variations determine if the wheel will cut more aggressively or will be more durable and less conformable (See below).

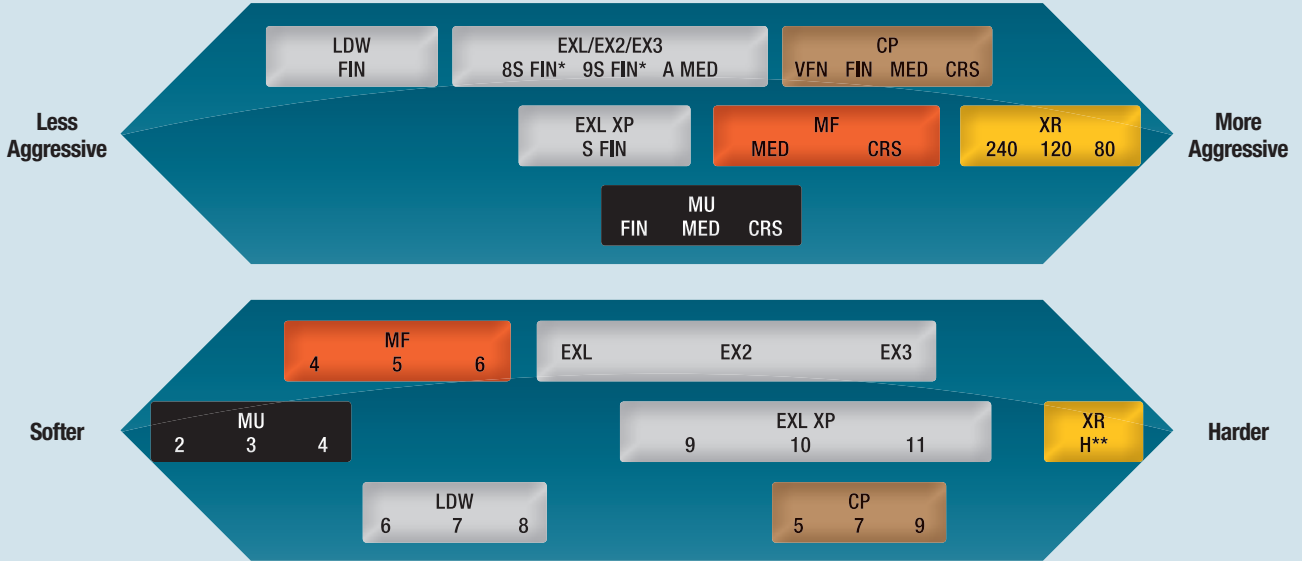

### Legend


CP	Cut and Polish Wheel	LDW	Light Deburring Wheel	MU	Multi-Finishing Wheel
EXL	EXL Deburring Wheel	MF	Metal Finishing Wheel	XR	XR Metalworking Wheel

\* Numeric designators (8/9) represent mineral aggressiveness; not density.

\*\* XR Wheel Density: H = Hard

	Scotch-Brite™ Convolute Wheel	Application				
		Cleaning	Deburring	Blending	Finishing	Polishing
<b>Best</b>	EXL Deburring		●	●	●	●
	EXL-XP Deburring		●	●	●	●
	Metal Finishing	●		●	●	
	Cut and Polish			●		
	Multi-Finishing			●	●	
	XR Metalworking		●	●		
	Light Deburring		●		●	

### Density Number (prefix to mineral)



### Mineral Abbreviations (prefix to grade)

- A—Aluminum Oxide mineral
- S—Silicon Carbide mineral

**ATTENTION: Wheels are available in other grades and sizes. If you need a specific wheel not listed, contact your 3M Sales Specialist or 3M Authorized Distributor.**

See pages 67–72 for available accessories.



## Scotch-Brite™ Convolute Wheels



### Scotch-Brite™ EXL-XP Deburring Wheels

- The new long life addition to the EXL family
- Excellent for deburring, polishing and finishing all types of metals, composites and glass



528678

UPC	Grade	Max. RPM	Dia. x W x AH	Qty./Case
048011-60442-8	9S FIN	6,000	6" x 1/2" x 1"	4
048011-60447-3	10S FIN			
048011-60452-7	11S FIN			
048011-60306-3	9S FIN			
048011-60310-0	10S FIN			
048011-60315-5	11S FIN	4,500	6" x 1" x 1"	3
048011-60443-5	9S FIN			
048011-60448-0	10S FIN			
048011-60453-4	11S FIN			
048011-60307-0	9S FIN			
048011-60311-7	10S FIN	4,500	8" x 1/2" x 3"	4
048011-60316-2	11S FIN			
048011-60444-2	9S FIN			
048011-60449-7	10S FIN			
048011-60454-1	11S FIN			
048011-60445-9	9S FIN	3,000	8" x 1" x 3"	3
048011-60317-9	10S FIN			
048011-60450-3	11S FIN			
048011-60308-7	9S FIN			
048011-60312-4	10S FIN			
048011-60317-9	11S FIN	3,000	8" x 2" x 3"	2
048011-60451-0	10S FIN			
048011-60455-8	11S FIN			
048011-60455-8	11S FIN			
048011-60455-8	11S FIN			
048011-60455-8	11S FIN	3,000	12" x 1/2" x 5"	4
048011-60317-9	10S FIN			
048011-60450-3	11S FIN			
048011-60308-7	9S FIN			
048011-60312-4	10S FIN			
048011-60317-9	11S FIN	3,000	12" x 1" x 5"	1
048011-60446-6	9S FIN			
048011-60451-0	10S FIN			
048011-60455-8	11S FIN			
048011-60455-8	11S FIN			
048011-60455-8	11S FIN	3,000	12" x 2" x 5"	1
048011-60455-8	11S FIN			
048011-60455-8	11S FIN			
048011-60455-8	11S FIN			
048011-60455-8	11S FIN			

### Scotch-Brite™ EXL, EX2 and EX3 Deburring Wheels

- Use to clean, finish, blend, deburr or polish all types of metals, composites and glass



14497

UPC	Grade	Max. RPM	Size	Qty./Case
<b>EXL</b>				
048011-13616-5	8A MED	6,000	6" x 1/2" x 1"	4
048011-09548-6	8S FIN			
048011-05790-3	9S FIN			
048011-13617-2	8A MED			
048011-18278-0	8S MED			
048011-09549-3	8S FIN	6,000	6" x 1" x 1"	3
048011-05132-1	9S FIN			
048011-13618-9	8A MED			
048011-05133-8	9S FIN			
048011-05133-8	9S FIN			
048011-05133-8	9S FIN	3,000	6" x 2" x 1"	2
048011-05133-8	9S FIN			
048011-05133-8	9S FIN			
048011-05133-8	9S FIN			
048011-05133-8	9S FIN			

### Scotch-Brite™ EXL, EX2 and EX3 Deburring Wheels (cont.)

UPC	Grade	Max. RPM	Size	Qty./Case	
<b>EXL (cont.)</b>					
048011-14791-8	8S FIN	4,500	8" x 3/8" x 3"	4	
048011-17459-4	8A MED				
048011-14629-4	8S FIN				
048011-05791-0	9S FIN				
048011-13619-6	8A MED				
048011-18279-7	8S MED	4,500	8" x 1" x 3"	3	
048011-09551-6	8S FIN				
048011-05135-2	9S FIN				
048011-13620-2	8A MED				
048011-09552-3	8S FIN				
048011-05136-9	9S FIN	3,600	8" x 2" x 3"	2	
048011-05137-6	9S FIN				
048011-15641-5	8S FIN				
048011-09005-4	9S FIN				
048011-13621-9	8A MED				
048011-18281-0	8S MED	3,000	12" x 1/2" x 5"	1	
048011-09554-7	8S FIN				
048011-05138-3	9S FIN				
048011-13622-6	8A MED				
048011-09555-4	8S FIN				
048011-05139-0	9S FIN	2,550	12" x 1" x 5"	1	
048011-13623-3	8A MED				
048011-05141-3	9S FIN				
048011-05141-3	9S FIN				
048011-05141-3	9S FIN				
<b>EX2</b>					
048011-17215-6	8A MED	6,000	6" x 1/2" x 1"	4	
048011-18285-8	8S MED				
048011-17216-3	8S FIN				
048011-24532-4	9S FIN				
048011-17217-0	8A MED				
048011-18286-5	8S MED	4,500	6" x 1" x 1"	3	
048011-17218-7	8S FIN				
048011-18040-3	9S FIN				
048011-17426-6	8A MED				
048011-17425-9	8S FIN				
048011-17219-4	8A MED	4,500	8" x 1/2" x 3"	4	
048011-17220-0	8S FIN				
048011-18365-7	9S FIN				
048011-17223-1	8A MED				
048011-17224-8	8S FIN				
048011-17224-8	8S FIN	3,000	8" x 1" x 3"	3	
048011-17224-8	8S FIN				
048011-17224-8	8S FIN				
048011-17224-8	8S FIN				
048011-17224-8	8S FIN				
<b>EX3</b>					
048011-24026-8	9S FIN	6,000	6" x 1/2" x 1"	4	
048011-18825-6			6" x 1" x 1"		
048011-24527-0		4,500	8" x 1" x 3"	3	
048011-18826-3			3,000		12" x 2" x 5"
048011-18826-3					

See pages 67–72 for available accessories.

## Scotch-Brite™ Convolute Wheels (cont.)

### Scotch-Brite™ Multi-Finishing Wheels

- Produces uniform grain finishes on stainless steel and other metals
- Highly conformable



51736

UPC	Grade	Max. RPM	Dia. x W x AH	Qty./Case
048011-13170-2	2S CRS	6,000	6" x 1" x 1"	3
048011-13171-9	2S MED			
048011-13172-6	2S FIN		6" x 2" x 1"	2
048011-13176-4	2S CRS			
048011-13177-1	2S MED	4,500	8" x 1" x 3"	3
048011-13178-8	2S FIN			
048011-13183-2	2S MED			
048011-13184-9	2S FIN		8" x 2" x 3"	2
048011-13185-6	2S CRS			
048011-13186-3	2S MED			

### Scotch-Brite™ XR Metalworking Wheels

- Increased mineral loading and grinding aids
- Provides a fast cut and improved wheel efficiency for extended life



31169

UPC	Grade	Max. RPM	Dia. x W x AH	Qty./Case
048011-33695-4†	HA 80	3,600	6" x 1/2" x 1"	2
048011-33067-9	HA 120			
048011-33072-3†	HA 240		6" x 1" x 1"	1
048011-33696-1†	HA 80			
048011-33068-6	HA 120			
048011-33073-0	HA 240			
048011-64506-3†	HA 120	3,450	8" x 1/4" x 3"	2
048011-33697-8†	HA 80		8" x 1/2" x 3"	
048011-33069-3†	HA 120		8" x 1" x 3"	1
048011-64445-5†	HA 240			
048011-33698-5†	HA 80			
048011-33070-9†	HA 120			
048011-33075-4	HA 240	1,750	12" x 1" x 5"	1
048011-33699-2†	HA 80			
048011-33071-6†	HA 120			
048011-33076-1†	HA 240			

† Made-to-Order

### Scotch-Brite™ Light Deburring Wheel

- Designed to provide a clean and economical system for removing fine burrs, yet resulting in a highly polished finish
- Ideal for fine deburring, polishing and finishing because of its conformability



94536

UPC	Grade	Max. RPM	Dia. x W x AH	Qty./Case
048011-03993-0	6S FIN	6,000	6" x 1/2" x 1"	4
048011-01662-7	7S FIN			
048011-03994-7	8S FIN			
048011-01660-3	6S FIN		6" x 1" x 1"	3
048011-01661-0	7S FIN			
048011-01675-7	8S FIN			
048011-01664-1	7S FIN	4,500	6" x 2" x 1"	2
048011-05263-2	7S FIN		8" x 1/2" x 3"	4
048011-01678-8	8S FIN			
048011-01665-8	6S FIN		8" x 1" x 3"	3
048011-01666-5	7S FIN			
048011-01679-5	8S FIN		8" x 2" x 3"	2
048011-01667-2	7S FIN			
048011-01683-2	7S FIN	3,600	10" x 1" x 5"	1
048011-05181-9	7S FIN	3,000	12" x 1/2" x 5"	
048011-01669-6	6S FIN		12" x 1" x 5"	1
048011-01670-2	7S FIN			
048011-01686-3	8S FIN			
048011-01672-6	6S FIN		12" x 2" x 5"	1
048011-01673-3	7S FIN			
048011-01689-4	8S FIN	12" x 3" x 5"	1	
048011-01690-0	7S FIN			
048011-17985-8	7S FIN	2,250	16" x 2" x 10"	

**ATTENTION: Wheels are available in other grades and sizes. If you need a specific wheel not listed, contact your 3M Sales Specialist or 3M Authorized Distributor.**

See pages 67–72 for available accessories.

## Scotch-Brite™ Convolute Wheels (cont.)

### Scotch-Brite™ Cut and Polish Wheels

- Heavy-duty wheels for aggressive blending and finishing
- Produce uniform results quickly and easily
- Replace rubber bonded wheels, set-up wheels and flap wheels



51737

UPC	Grade	Max. RPM	Dia. x W x AH	Qty./Case
048011-05253-3†	7A CRS	6,000	6" x 1/2" x 1"	4
048011-08931-7†	7A MED			
048011-05182-6	5A FIN			
048011-08946-1†	7A FIN			
048011-03263-4†	7A CRS		6" x 1" x 1"	3
048011-03262-7†	7A MED			
048011-02960-3	5A FIN			
048011-03270-2	7A FIN			
048011-03269-6†	7A VFN			
048011-93503-4†	5A FIN			
048011-03273-3†	7A CRS	6" x 1" x 1-1/4"	2	
048011-03272-6†	7A MED	6" x 2" x 1"		
048011-02972-6†	5A FIN	6" x 25" x 1"	1	
048011-60043-7†	7A MED			
048011-05183-3†	7A MED	4,500	8" x 1/2" x 3"	4
048011-09018-4†	5A FIN			
048011-14623-2†	7A FIN		8" x 1" x 1-1/4"	3
048011-02974-0†	5A FIN			
048011-03277-1†	7A CRS		8" x 1" x 3"	2
048011-03276-4	7A MED			
048011-02965-8†	5A FIN			
048011-03275-7†	7A FIN			
048011-03274-0†	7A VFN		8" x 1-1/2" x 1-1/4"	1
048011-92862-3†	5A FIN			
048011-08934-8†	7A MED	8" x 1-1/2" x 3"	3	
048011-04156-8†	5A FIN			
048011-02976-4†	5A FIN	8" x 2" x 1-1/4"	2	
048011-03282-5†	7A CRS			
048011-03281-8	7A MED	8" x 2" x 3"	1	
048011-02967-2†	5A FIN			
048011-03280-1†	7A FIN			
048011-03279-5†	7A VFN			
048011-93674-1†	7A MED	8" x 2-1/2" x 3"	1	

† Made-to-Order

### Scotch-Brite™ Cut and Polish Wheels (cont.)

UPC	Grade	Max. RPM	Dia. x W x AH	Qty./Case
048011-03283-2†	7A MED	4,500	8" x 3" x 3"	1
048011-02979-5†	5A FIN			
048011-93454-9†	7A CRS		8" x 4" x 3"	
048011-92936-1†	7A MED			
048011-93675-8†	7A MED		8" x 5" x 3"	
048011-05248-9†	7A FIN			
048011-13488-8†	5A FIN		8" x 7" x 3"	
048011-25617-7†	7A MED			
048011-15591-3†	5A FIN		8" x 20" x 3"	
048011-13486-4†	7A CRS			
048011-92938-5†	7A MED	8" x 24" x 3"		
048011-16463-2†	5A FIN			
048011-60040-6†	7A VFN	8" x 25" x 3"		
048011-04244-2†	7A MED			
048011-05256-4†	5A FIN	3,000	12" x 1/2" x 5"	2
048011-03295-5†	7A CRS			
048011-03294-8†	7A MED		12" x 1" x 5"	
048011-02975-7†	5A FIN			
048011-93677-2†	7A MED		12" x 1-1/2" x 5"	
048011-02977-1†	5A FIN			
048011-03300-6†	7A CRS		12" x 2" x 5"	
048011-03299-3	7A MED			
048011-02969-6	5A FIN		12" x 2" x 5"	
048011-03297-9†	7A VFN			
048011-03303-7†	7A MED	12" x 3" x 5"		
048011-05908-2†	5A FIN			
048011-03301-3†	7A VFN	12" x 3" x 5"		
048011-05533-6†	7A MED			
048011-02983-2†	5A FIN	12" x 4" x 5"		
048011-05243-4†	7A VFN			
048011-16913-2†	5A FIN	12" x 5" x 5"		
048011-27887-2†	5A FIN			
048011-60042-0†	7A CRS	12" x 24" x 5"		
048011-60044-4†	7A MED			
048011-60041-3†	7A VFN	12" x 25" x 5"		

† Made-to-Order

See pages 67–72 for available accessories.

## Scotch-Brite™ Convolute Wheels (cont.)

### Scotch-Brite™ Metal Finishing Wheels

- Provides a consistent and uniform decorative brushed finish
- Use to match #3 and #4 mill finishes
- Removes minor imperfections and handling marks



UPC	Grade	Max. RPM	Size	Qty./Case
048011-05394-3†	6A CRS	6,000	6" x 1/2" x 1"	4
048011-05391-2†	5A MED			
048011-01861-4	4A CRS		6" x 1" x 1"	3
048011-01863-8	5A CRS			
048011-01866-9	6A CRS			
048011-01860-7†	4A MED			
048011-01862-1	5A MED			
048011-01865-2	6A MED			
048011-30012-2†	5A CRS		6" x 1" x 1-1/4"	3
048011-24110-4†	5A MED			
048011-01868-3	4A CRS		6" x 2" x 1"	2
048011-01888-1	5A CRS			
048011-01870-6†	6A CRS			
048011-01867-6	4A MED			
048011-01869-0	5A MED			
048011-01889-8†	6A MED			
048011-01891-1†	4A CRS	6" x 3" x 1"	1	
048011-08891-4†	4A MED			
048011-09118-1†	5A CRS			
048011-09118-1†	5A CRS			
048011-14336-1†	5A CRS	4,500	8" x 1/2" x 3"	4
048011-16449-6†	5A MED			
048011-05414-8†	4A CRS		8" x 1" x 3"	3
048011-01872-0	5A CRS			
048011-01901-7	6A CRS			
048011-08926-3†	4A MED			
048011-01871-3	5A MED			
048011-01900-0†	6A MED			
048011-92896-8†	5A CRS		8" x 1-1/2" x 3"	3
048011-01875-1†	4A CRS			
048011-01904-8	5A CRS		8" x 2" x 3"	2
048011-13453-6†	6A CRS			
048011-01874-4	4A MED			
048011-01876-8	5A MED			
048011-01905-5†	6A MED			

† Made-to-Order

### Scotch-Brite™ Metal Finishing Wheels (cont.)

UPC	Grade	Max. RPM	Size	Qty./Case
048011-15608-8†	5A CRS	4,500	8" x 3" x 3"	1
048011-13451-2†	6A CRS			
048011-13452-9†	4A MED			
048011-05395-0†	5A MED			
048011-25612-2†	6A MED	3,000	12" x 1/2" x 5"	2
048011-15607-1†	5A MED			
048011-05398-1†	5A CRS		12" x 1" x 5"	1
048011-15062-8†	6A CRS			
048011-01916-1	5A MED			
048011-08924-9†	6A MED			
048011-25619-1†	6A MED			
048011-25621-4†	6A CRS			
048011-15326-1†	5A MED		12" x 1-1/4" x 5"	1
048011-09612-4†	4A CRS			
048011-13449-9	5A CRS		12" x 2" x 5"	1
048011-13448-2†	6A CRS			
048011-01921-5†	4A MED			
048011-01882-9	5A MED			
048011-14617-1†	6A MED			
048011-13446-8†	4A CRS			
048011-08902-7†	5A CRS	12" x 3" x 5"	1	
048011-92916-3†	4A MED			
048011-08929-4†	5A MED	12" x 3-1/2" x 5"	1	
048011-16422-9†	5A MED			
048011-13445-1†	4A CRS	12" x 4" x 5"	1	
048011-13071-2†	5A CRS			
048011-18634-4†	6A CRS			
048011-25615-3†	4A MED			
048011-05392-9†	5A MED			


† Made-to-Order

**ATTENTION: Wheels are available in other grades and sizes. If you need a specific wheel not listed, contact your 3M Sales Specialist or 3M Authorized Distributor.**

See pages 67–72 for available accessories.

## Unitized Wheels Selection Guides

Scotch-Brite™ Unitized Wheel performance differences can be attributed to mineral (aggressiveness) and density (hardness). The combination of these two characteristics and subtle variations determine if the wheel will cut more aggressively or will be more durable and less conformable (See below).

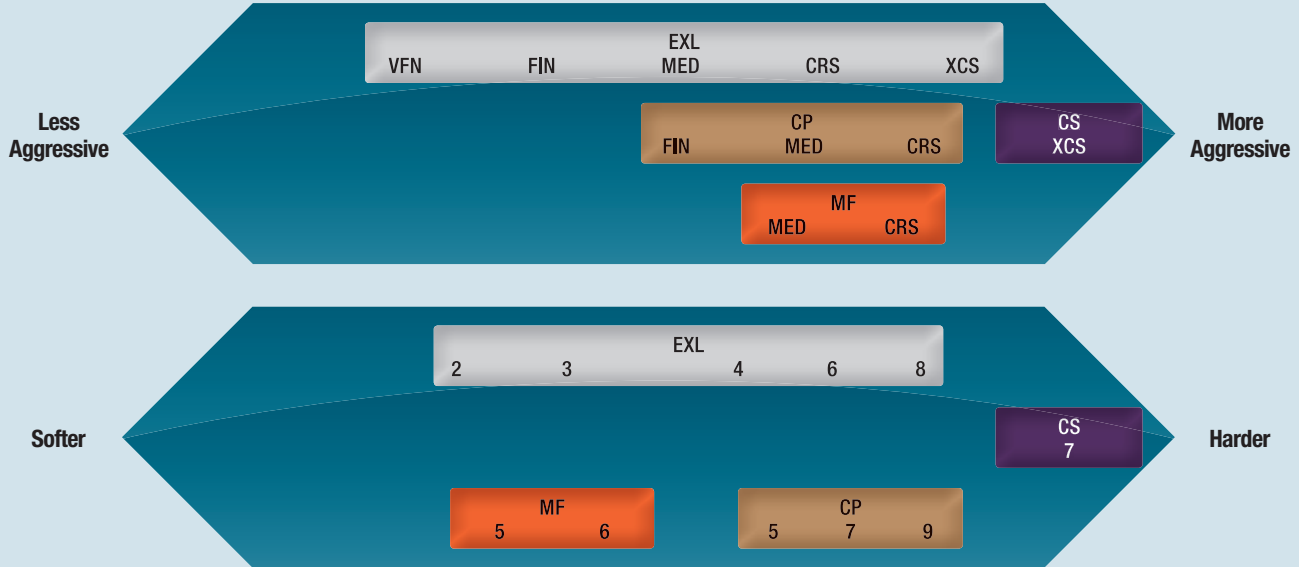

Legend	
	CP Cut and Polish Unitized Wheel
	CS Clean and Strip Unitized Wheel
	EXL EXL Unitized Wheel
	MF Metal Finishing Unitized Wheel

\* No mineral: Use with abrasive compound.

	Scotch-Brite™ Unitized Wheel	Application				
		Cleaning	Deburring	Blending	Finishing	Polishing
Best	EXL Deburring		●	●		●
	Cut and Polish		●	●		●
	Metal Finishing			●	●	
	Clean and Strip	●				

Density Number (prefix to mineral)
soft ← → hard
2 4 6 7 8 9 10 11
Mineral Abbreviations (prefix to grade)
A—Aluminum Oxide mineral
S—Silicon Carbide mineral

## Scotch-Brite™ Unitized Wheels

### Scotch-Brite™ EXL Unitized Deburring Wheels

- Strong and efficient for deburring and polishing of all metal alloys
- Excellent in resisting smearing and minimizing heat buildup on the work piece
- Conformable wheel in a variety of densities and grades for maximum cut and durability



51730

### Scotch-Brite™ EXL Unitized Deburring Wheels (cont.)

UPC	Grade	Max. RPM	Dia. x W x AH	Qty./Case
048011-15516-6	8A CRS	35,100	1" x 1/8" x 1/8"	100
048011-15517-3	6A MED		1" x 1/4" x 1/8"	
048011-13734-6	2S FIN		1" x 1" x 3/16"	50
048011-13752-0	8A CRS			
048011-15527-2	2A MED			
048011-14063-6	6A MED			
048011-13753-7	8A MED			
048011-13713-1	2S FIN			

See pages 67–72 for available accessories.

## Scotch-Brite™ Unitized Wheels (cont.)

### Scotch-Brite™ EXL Unitized Deburring Wheels (cont.)

UPC	Grade	Max. RPM	Dia. x W x AH	Qty./Case
048011-15514-2	8A CRS	30,100	1-1/2" x 1/8" x 3/16"	80
048011-15515-9	6A MED			
048011-13714-8	2S FIN			
048011-14746-8		1-1/2" x 1/4" x 3/16"		
048011-15511-1	8A CRS	22,100	2" x 1/8" x 3/16"	60
048011-15512-8	6A MED			
048011-13736-0	2S FIN	16,100	2" x 1/4" x 1/8"	60
048011-15513-5	2S FIN			
048011-13755-1	8A CRS	22,100	2" x 1/4" x 1/4"	30
048011-15529-6	2A MED			
048011-13932-6	2S FIN	16,100	2" x 1/2" x 1/4"	30
048011-13715-5	2S FIN			
048011-15462-6	8A MED	18,100	3" x 1/8" x 1/4"	40
048011-13763-6	8A CRS			
048011-15531-9	2A MED	12,100	3" x 1/4" x 1/4"	40
048011-14067-4	6A MED			
048011-13764-3	8A MED	18,100	3" x 1/4" x 3/8"	40
048011-13716-2	2S FIN			
048011-13766-7	8A CRS	18,100	3" x 1/4" x 3/8"	40
048011-16054-2	2A MED			
048011-15118-2	6A MED	18,100	3" x 1/4" x 3/8"	40
048011-14753-6	8A MED			
048011-14750-5	2S FIN	12,100	3" x 1/2" x 1/4"	20
048011-14751-2	4A FIN			
048011-14752-9	6S FIN	18,100	3" x 3/4" x 1/4"	10
048011-13767-4	8A CRS			
048011-15532-6	2A MED	10,000	4" x 1/4" x 1/4"	20
048011-13717-9	2S FIN			
048011-13718-6	2S FIN	8,500	6" x 1/4" x 1/2"	8
048011-13739-1	2S FIN			
048011-17498-3	2A MED	4,500	6" x 1/4" x 3/4"	4
048011-13741-4	2S FIN			
048011-25678-8	2S FIN	5,000	6" x 1/2" x 1/2"	4
048011-15534-0	2A MED			
048011-13719-3	2S FIN	5,000	6" x 1/2" x 5/8"	4
048011-15831-0	2S FIN			
048011-16545-5	2A MED	4,500	6" x 1/2" x 1"	2
048011-14379-8	2S FIN			
048011-13742-1	2S FIN	5,000	6" x 1" x 1/2"	2
048011-16544-8	2A MED			
048011-13743-8	2S FIN	5,000	6" x 1" x 1"	8
048011-15827-3	2S FIN			
048011-15844-0	2S FIN	4,000	8" x 1/4" x 1/2"	4
048011-15824-2	2S FIN			
048011-15817-4	2S FIN	2,600	8" x 1/2" x 1/2"	4
048011-15817-4	2S FIN			
048011-15817-4	2S FIN	2,600	12" x 1/2" x 1-1/4"	2
048011-15817-4	2S FIN			

See pages 67–72 for available accessories.


### Scotch-Brite™ Metal Finishing Wheel



- Highly conformable wheel applies uniform and consistent satin/antique finishes
- Ideal for stainless steel to match #3 or #4 mill finishes and create brushed or satin finishes on cutlery
- Great on softer metals such as aluminum, copper and brass to blend out minor surface imperfections and handling marks

UPC	Grade	Max. RPM	Dia. x W x AH	Qty./Case
048011-29257-1	5A MED	6,000	6" x 1/2" x 1"	4
048011-29259-5			6" x 1" x 1"	2

### Scotch-Brite™ Roloc™ EXL Unitized Wheels



- Strong, efficient products for edge deburring and finishing
- Used with 3M™ Roloc™ or 3M™ Roloc™ + holder pads on a straight shaft or right-angle tool

UPC	Grade	Max. RPM	Size	Qty./Case
<b>Roloc TR (Plastic Button)</b>				
048011-17185-2	2A MED	22,100	2"	60
048011-17183-8	2S FIN			
048011-17190-6	6A MED			
048011-17192-0	8A MED	15,100	3"	40
048011-17186-9	2A MED			
048011-17184-5	2S FIN			
048011-17191-3	6A MED			
048011-17193-7	8A MED			


### Scotch-Brite™ Clean and Strip Unitized Wheel



- Great for heavy duty cleaning applications
- Open web construction wheel runs smooth and resists loading of soft coatings
- Extra coarseness of web is perfect for removing scale, rust, surface contaminants and paints

UPC	Grade	Max. RPM	Dia. x W x AH	Qty./Case
048011-01003-8	7S XCS	35,100	1" x 1" x 3/16"	50
048011-01005-2		20,100	2" x 1/2" x 1/4"	30
048011-01009-0		14,100	3" x 1/2" x 1/4"	20
048011-01012-0		10,000	3" x 1" x 1/4"	10
048011-01021-2		7,000	4" x 1" x 1/4"	5
048011-01032-8		7,000	6" x 1" x 5/8"	2
048011-01034-2	7,000	6" x 1" x 1"		

**ATTENTION: Wheels are available in other grades and sizes. If you need a specific wheel not listed, contact your 3M Sales Specialist or 3M Authorized Distributor.**

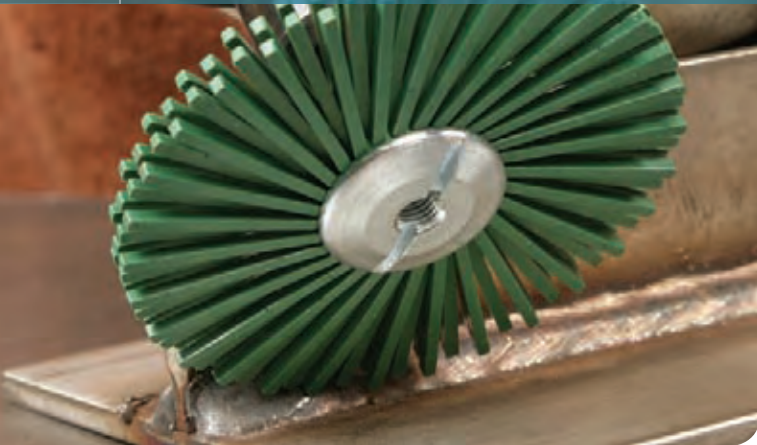

524401

## Scotch-Brite™ Unitized Wheels (cont.)

### Scotch-Brite™ Cut and Polish Unitized Wheel

- Tightly layered “unitized” construction offers long life and durability
- Excellent for aggressive heavy duty blending and finishing with uniform results
- Good replacement for rubber bonded wheels and small set-up wheels



UPC	Grade	Max. RPM	Dia. x W x AH	Qty./Case	
048011-03701-1	7A CRS	35,100	1" x 1" x 3/16"	50	
048011-03700-4	7A MED				
048011-01560-6	5A FIN				
048011-08939-3	7A MED	22,100	2" x 1/8" x 1/8"	60	
048011-03714-1	7A MED		2" x 1/8" x 1/4"		
048011-03716-5	7A CRS		2" x 1/4" x 1/4"		
048011-03715-8	7A MED				
048011-01561-3	5A FIN	20,100	2" x 1/2" x 1/4"	30	
048011-03718-9	7A MED				
048011-03727-1	7A MED				
048011-03729-5	7A CRS	18,100	3" x 1/8" x 1/4"	40	
048011-03728-8	7A MED				
048011-01563-7	5A FIN				
048011-15121-2	5A FIN				
048011-03705-9	7A MED	15,100	3" x 1/4" x 1/4"	20	
048011-01565-1	5A FIN		3" x 1/2" x 1/4"		
048011-03732-5	7A MED				
048011-08878-5	5A FIN		3" x 1/2" x 3/8"		10
048011-03738-7	7A MED				
048011-03740-0	7A MED		3" x 1" x 1/4"		
048011-01578-1	5A FIN		12,100		4" x 1/4" x 1/4"
048011-01581-1	5A FIN	7,500	6" x 1/4" x 1/2"	8	

**ATTENTION: Wheels are available in other grades and sizes. If you need a specific wheel not listed, contact your 3M Sales Specialist or 3M Authorized Distributor.**

See pages 67–72 for available accessories.

## Scotch-Brite™ Brushes

### Scotch-Brite™ Radial Bristle Brush, TA

- Excellent replacement for wire brushes
- Use on bench motors for general purpose cleaning applications
- No flying wires yet higher cut rates
- Very strong and flexible
- Comes with adapters for multiple shaft sizes (1/2", 5/8", 3/4", 7/8", 1", 2" and 8")



159129

UPC	Grade	Color	Max. RPM	Dia. x W	Qty./Case
048011-24279-8	50	Green	25,000	3" x 3/8"	40
048011-24280-4	80	Yellow			
048011-24281-1	120	White			
048011-27603-8	36	Brown	6,000	6" x 1/2" x 1"	5
048011-27605-2	50	Green			
048011-27606-9	80	Yellow			

### Scotch-Brite™ Flap Brush CPFB-S and CPFB-R+

- Heavy-duty brush
- Excellent for removing handling marks and surface imperfections
- Available on 1/4" shaft (CPFB-S) or 3M™ Roloc™+ attachment system (CPFB-R+)



51748

UPC	Grade	Max. RPM	Dia. x W x (Shaft)	Qty./Case
<b>CPFB-S</b>				
048011-16622-3	A MED	12,000	2" x 1" x 1/4"	25
048011-05974-7		8,500	3" x 1-3/4" x 1/4"	10
<b>CPFB-R+</b>				
048011-14588-4	A MED	8,000	3" x 1-3/8"	10


### Scotch-Brite™ Flap Brush CFFB-S and CFFB-R

- Ideal for decorative finishes and light deburring applications
- Available on 1/4" shaft (CFFB-S) or 3M™ Roloc™+ attachment system (CFFB-R)



160008

UPC	Grade	Max. RPM	Dia. x W x (Shaft)	Qty./Case
<b>CFFB-S</b>				
048011-05975-4	A CRS	8,500	3" x 1-3/4" x 1/4"	10
048011-14781-9	S FIN			
<b>CFFB-R</b>				
048011-14587-7	A CRS	8,000	3" x 1-3/8"	10
048011-14783-3	S FIN			



## Scotch-Brite™ Combi Wheel

### Scotch-Brite™ Combi Wheel, Combi-S

- Made of alternating flaps of coated abrasive and Scotch-Brite™ web
- Provides aggressive cut and fine finishes



51752

UPC	Grade	Max. RPM	Dia. x W x Shaft	Qty./Case
<b>CFFB-S</b>				
051144-80801-4	80	8,000	3" x 1-3/4" x 1/4"	10
051144-80678-2	P120			
051144-80799-4	P180			

## Scotch-Brite™ Discs

### Scotch-Brite™ CPD5-R and CPD5-S Discs

- Five discs made of a durable web, ganged together on a shaft
- Use for satin or antique finishing as well as light- to medium-duty cleaning applications
- Available on a 1/4" shaft (CPD5-S) or 3M™ Roloc™+ attachment system (CPD5-R)



159131

UPC	Grade	Max. RPM	Dia. x W x (Shaft)	Qty./Case
<b>CPD5-S</b>				
048011-14593-8	A MED	10,000	3" x 1-1/4" x 1/4"	10
048011-14779-6		8,000	4" x 1-1/4" x 1/4"	
<b>CPD5-R</b>				
048011-14594-5	A MED	10,000	3" x 1-1/4"	10
048011-14590-7		8,000	4" x 1-1/4"	

### Scotch-Brite™ Clean and Strip Discs D2

- Aggressive web is excellent for cleaning welds, rust, paint and coatings



51747

UPC	Grade	Max. RPM	Dia. x W x Shaft	Qty./Case
048011-14780-2	S XCS	8,000	4" x 1" x 1/4"	10
048011-14784-0			4" x 1"	8

## Scotch-Brite™ Stars

### Scotch-Brite™ Stars

- Perfect for polishing internal diameters of pipe and tubing
- Conformable Scotch-Brite™ construction assures complete cleaning and polishing of all surfaces



524413

UPC	Grade	Max. RPM	Diameter	Qty./Case
048011-13370-6	A CRS	24,000	1-1/2"	100
048011-13800-8	A VFN		2"	
048011-13371-3	A CRS			
048011-13803-9	A VFN	18,000	3"	50
048011-13372-0	A CRS		4"	
048011-13802-2	A VFN			
048011-13373-7	A CRS			
048011-13804-6	A VFN			

## Scotch-Brite™ Cross Buffs

### Scotch-Brite™ Cross Buffs



- Versatile and flexible shape ideal for light deburring, cleaning, finishing and polishing internal diameters and hard to reach areas
- Available in A VFN for high luster finishes or A MED for more aggressive applications requiring increased durability

UPC	Grade	Max. RPM	Diameter	Qty./Case
048011-64299-4	A MED	20,000	1" x 3/8" x 2 PLY x 8-32	50
048011-60426-8	A VFN		1-1/2" x 3/8" x 2 PLY x 8-32	
048011-64305-2	A MED			
048011-60429-9	A VFN	12,000	2" x 1/2" x 2 PLY x 8-32	25
048011-64312-0	A MED			
048011-60430-5	A VFN			

See pages 67–72 for available accessories.

524398



524413




## Scotch-Brite™ Hand Pad Selection Guide

	Blending	Finishing	Deburring	Cleaning
<b>Good</b>	Multi-Flex	Multi-Flex	—	Multi-Flex
<b>Better</b>	7446, 7447	7440, 7447, 7448	—	7447
<b>Best</b>	7440, 8447	7446, 8447	7440	8447


Less Aggressive/Finer Finish

More Aggressive/Coarser Finish




### Scotch-Brite™ Ultra Fine Hand Pad 7448 (Gray)

- Ultra fine consistent finishes on metals, woods, plastics and composites
- Provides similar performance as steel wool grade 00




### Scotch-Brite™ General Purpose Hand Pad 7447 (Maroon)

- Standard for surface conditioning worldwide
- Clean, blend, finish, and deburr faster, easier and with better results than conventional abrasives
- Provides similar performance as steel wool grade 1



### Scotch-Brite™ Production Hand Pad 8447 (Maroon)

- High cut for paint preparation, blending, and scuffing
- Long life performance on aluminum, stainless steel, plastics, wood and fiberglass
- Provides similar performance as steel wool grade 2



### Scotch-Brite™ Blending Hand Pad 7446 (Gray)

- Specially designed for hand blending and finishing stainless steel
- Mineral coarseness blends surface scratches on many metals, wood and synthetic surfaces
- Provides similar performance as steel wool grade 3



### Scotch-Brite™ Heavy Duty Hand Pad 7440 (Tan)

- Most durable and aggressive pad for quick stock removal
- Cuts fast to remove contaminants and oxides in the most demanding cleaning and finishing applications
- Provides similar performance as steel wool grade 4

See pages 67–72 for available accessories.



## Scotch-Brite™ Hand Pads

### Scotch-Brite™ Hand Pads

- Excellent products for hand finishing and cleaning of woods, metals and composites
- Ideal for wood finishing, paint prep and general cleaning



UPC	Grade	Color	Cat. No.	W x L	Qty./Case
048011-04050-9	A MED	Tan	7440	6" x 9"	40
048011-04051-6	S MED	Gray	7446		
048011-04029-5	A VFN	Maroon	7447		60
048011-04229-9			7447 Bulk		
048011-24037-4			8447		
048011-04028-8	S ULF	Light Gray	7448		

## Scotch-Brite™ Sheet Roll and Roll Selection Guide

	Blending	Finishing	Deburring	Cleaning
<b>Good</b>	Multi-Flex	Multi-Flex	—	Multi-Flex
<b>Better</b>	Clean and Finish	Clean and Finish	—	Clean and Finish
<b>Best</b>	Cut and Polish	Production Clean and Finish	Cut and Polish	Production Clean and Finish

### Scotch-Brite™ Rolls

#### Scotch-Brite™ Multi-Flex Sheet Rolls

- Highly conformable non-woven web roll is perforated to easily tear into sixty 8" x 4" sheets
- Excellent sharpness and conformability for cleaning and finishing surfaces by hand



51768

UPC	Grade	Color	W x L	Qty./Case
051131-07521-4	A VFN	Maroon	8" x 20'	2
051131-07522-1	S ULF	Light Gray		

#### Scotch-Brite™ Cut and Polish Rolls

- A unique and aggressive material for cleaning and finishing
- Sturdy, long lasting web material is great for heavy industrial cleaning and light deburring applications
- Works well for stropping and other bench applications



14432

UPC	Grade	W x L	Qty./Case
048011-04085-1	A MED	1" x 30'	2
048011-05206-9		2" x 30'	
048011-05207-6		4" x 30'	

#### Scotch-Brite™ Production Clean and Finish Rolls

- Precision web/mineral configuration for most uniform general purpose finishing in roll form
- Excellent for critical finishes and long life



UPC	Grade	Color	W x L	Qty./Case
048011-28175-9†	A VFN	Maroon	4" x 30'	3
048011-28176-6†			6" x 30'	2

† Made-to-Order

#### Scotch-Brite™ Clean and Finish Rolls

- Highly conformable Scotch-Brite™ web can be cut to desired length for hand sanding or oscillating sanders



51764

UPC	Grade	W x L	Min./Case
048011-00291-0†	A FIN	2" x 30'	6
048011-00260-6	A VFN		
048011-00261-3			3" x 30'
048011-00264-4	A MED	4" x 30'	3
048011-00265-1	A FIN		
048011-00266-8	A VFN		
048011-00270-5			
048011-00263-7	F SFN		
048011-00267-5			
048011-00268-2	S ULF	6" x 30'	2
048011-00262-0	TALC		
048011-00274-3	A MED		
048011-00275-0	A FIN	12" x 30'	1
048011-00276-7	A VFN		
048011-00284-2			
048011-00254-5	TALC		

† Made-to-Order

14399



See pages 67–72 for available accessories.

## Kits and Packs

### Scotch-Brite™ Surface Conditioning Disc Pack 9145S, 915S, 917S

- Contains a variety of grades of non-woven surface conditioning discs
- Used for cleaning, finishing, blending and deburring applications
- Includes 9145 disc pad holder



UPC (048011-)	Max RPM	Catalog No.	Size	Min./Case
14105-3	13,000	9145S	4-1/2"	1/5
08713-9	10,000	915S	5"	
04270-1	6,000	917S	7"	

### Scotch-Brite™ Surface Conditioning Disc Pack 920S

- Contains a variety of grades of 2" and 3" non-woven surface conditioning discs
- Used for cleaning, finishing, blending and deburring applications
- Includes 922 and 923 disc pad holder



UPC (048011-)	Size	Min./Case
18253-7	2" and 3"	1/5

### Scotch-Brite™ Hand Pad Trial Pack 961S

- Contains 1 each of the following:
  - Scrubbing Sponge 74
  - Light Duty Pad 6448
  - Heavy Duty Pad 7440
  - Light Duty Cleansing Pad 7445
  - Blending Pad 7446
  - General Purpose Pad 7447
  - Ultra Fine Pad 7448
  - Production Pad 8447
  - Twist-Lok™ Pad Holder 961



UPC (048011-)	Size	Min./Case
17144-9	6" x 9"	5

### 3M™ Roloc™ Disc Pack 982S and 983S

- Includes Roloc™ Surface Conditioning Discs, 3M™ Coated Abrasive Discs and 3M™ Roloc™ Disc Pad

UPC (051144-)	Catalog No.	Size	Min./Case
82899-9	982S	2"	1/5
82900-2	983S	3"	

### 3M™ Roloc™ Bristle Disc Pack 983BS

- Contains a variety of grades of 3M™ Roloc™ Bristle Discs 3" diameter x 5/8" trim
- Includes a disc pad holder



UPC (048011-)	Size	Min./Case
18697-9	3"	1/5

### 3M™ Roloc™ Disc Pack 985S

- Contains a variety of grades of 2" and 3" non-woven 3M™ Roloc™ Surface Conditioning Discs
- Also contains 2" and 3" disc pads and 1/4" threaded shaft

UPC (048011-)	Size	Min./Case
18254-4	2" and 3"	1/5

### Scotch-Brite™ Unitized Wheel Pack 990S

- Contains several Scotch-Brite™ external Unitized Wheels 1" x 1" x 3/16" and 3" x 1/4" x 3/8" in a variety of densities and grades
- Also includes 936 and 990 mandrels



UPC (048011-)	Size	Min./Case
18245-2	1" x 1" x 3/16" and 3" x 1/4" x 3/8"	1/5

### 3M™ NTN Maintenance and Repair Kit

- Variety of easy mounting (no mounting tools required) coated and surface conditioning 4-1/2" discs for use on right angle tools
- Contains 1 each of the following:
  - 3M™ TN Disc Pad
  - Scotch-Brite™ Light Grinding and Blending Disc, TN, Super Duty
  - Scotch-Brite™ Clean and Strip XT Disc, TN, S XCS
  - 3M™ Fibre Disc 785C, TN, grade 36
  - 3M™ Flap Disc 747D, TN, grade 36










UPC (048011-)	Size	Min./Case
33013-6	4-1/2"	1/5

For appropriate product maximum operating speed, see kit package safety insert.

## Accessories

Product Name	UPC	Qty./Case	For Use With	Size/Description	Max RPM
<b>3M™ Fibre Disc Accessories</b>					
<b>3M™ Disc Pad Hub</b>  51694	051144-45205-7	10	3M™ Disc Pad Face Plates (all sizes)	2-1/2" Diameter; 5/8–11 metal insert	N/A
	051144-88743-9		3M™ Disc Pad Face Plates (all sizes, tool shaft length 1/2" or less)	2-1/2" Diameter; 5/8–11 metal insert	
	051144-45190-6		3M™ Disc Pad Face Plates (7" or larger)	4-1/2" Diameter; 5/8–11 metal insert	
<b>3M™ Disc Pad Face Plates</b>  51695	051144-13325-3	10	Fibre Discs	4-1/2" Diameter; Smooth; Medium – Gray	13,300
	051144-14270-5			4-1/2" Diameter; Smooth; Hard – Black	
	051144-81734-4			5" Diameter; Ribbed; Medium – Gray	12,000
	051144-81733-7			5" Diameter; Ribbed; Hard – Black	
	051144-81732-0			5" Diameter; Ribbed; Extra Hard – Red	
	051144-80516-7			7" Diameter; Ribbed; Medium – Gray	8,600
	051144-80515-0			7" Diameter; Ribbed; Hard – Black	
	051144-80514-3			7" Diameter; Ribbed; Extra Hard – Red	
<b>3M™ TN Quick Change Disc Backup Pad</b>  352092	051111-56573-5	5	4-1/2" TN Discs	4-1/2" x 5/8–11 INT	13,300
<b>3M™ Disc Retainer Nuts</b>  51696	051111 -51047-6	10	3M™ Disc Pad Face Plates and Disc Pad Hubs	5/16" Depth; 5/8–11 Thread	N/A
	051144 -05622-4			3/8" Depth; 5/8–11 Thread	
	051144 -05621-7			1/2" Depth; 5/8–11 Thread	
	051144 -05620-0			5/8" Depth; 5/8–11 Thread	
<b>3M™ Disc Holder Adapter No. 9</b>  12896	048011-22971-3	10	Converts grinders with M10–1.25, M10–1.5, or 3/8–24 external threaded shaft to a 5/8–11 external threaded shaft	M10–1.25 INT	N/A
	048011-22972-0			M10–1.50 INT	
	048011-22970-6			3/8–24 INT	
<b>3M™ Flap Discs/Bonded Wheels Accessories</b>					
<b>Flap Disc/Grinding Wheel Adapter Nut</b>  158149	051144-88765-1	1 Pair/5 Pairs	Secures 4-1/2" diameter flap discs or 4-1/2" grinding wheels to right angle tool with a 5/8–11 threaded shaft	5/8–11 Thread Size	N/A
<b>Flap Disc Holder</b>  158318	051144-88769-9	1	Backup plate for 7" diameter flap discs or 8" diameter type 27 grinding wheels	4" Diameter; 5/8–11 Thread Size	N/A






## Accessories

Product Name	UPC	Qty./Case	For Use With	Size/Description	Max RPM
<b>3M™ Flap Discs/Bonded Wheels Accessories (cont.)</b>					
<b>3M™ Green Corps™ Flexible Grinding Disc</b>  <p>215540</p>	051111-51046	5/100	Backup plate for 4-1/2" center hole flexible grinding wheel	7/8" Center Hole Diameter; 3-3/8" Diameter; Clear	N/A
	051111-51045		Backup plate for 7" center hole flexible grinding wheel	7/8" Center Hole Diameter; 4-5/8" Diameter; Clear	
<b>3M™ Roloc™ Disc Accessories</b>					
<b>3M™ Roloc™ TR Disc Pads</b>  <p>78458</p>  <p>12923</p>	051144-45101-2	5	3M™ Roloc™ TR Discs	1" Diameter; Medium; 1/4-20 INT	30,000
	051144-45099-2			1-1/2" Diameter; Medium; 1/4-20 INT	
	051144-45100-5			1-1/2" Diameter; Hard; 1/4-20 INT	
	051144-45095-4			2" Diameter; Medium; 1/4-20 INT	25,000
	051144-45096-1			2" Diameter; Hard; 1/4-20 INT	
	051144-45092-3			3" Diameter; Medium; 1/4-20 INT	18,000
	051144-45091-6			3" Diameter; Hard; 1/4-20 INT	20,000
	051144-45179-1			4" Diameter; Medium; 1/4-20 INT	12,000
	051144-83242-2			4" Diameter; Medium; 5/8-11 INT	
	051144-83489-1			4" Diameter; Hard; 5/8-11 INT	
	051144-83980-3			4" Diameter; Extra Hard; 5/8-11 INT	
	<b>3M™ Roloc™ TS or TSM Disc Pads</b>  <p>221758</p>  <p>12870</p>			051144-77729-7	5
051144-77728-0		1-1/2"; Hard			
051144-14211-8		2"; Medium	25,000		
051144-14212-5		2"; Hard			
051144-14215-6		3"; Medium			
051144-14216-3		3"; Hard			
<b>3M™ Roloc™ TP Disc Pads</b>	051144-14201-9	5	3M™ Roloc™ TP Discs	3"; Medium; 1/4-20 INT	18,000
	051144-14202-6			3"; Hard; 1/4-20 INT	20,000
<b>1/4" Threaded Shaft</b>  <p>158006</p>	051144-45102-9	10/50	Used on 3M™ Roloc™ Disc Pads with 1/4-20 INT	1/4" x 1/4-20 Thread	N/A
<b>3M™ Roloc™ + Holder</b>  <p>51732</p>	048011-15408-4	5	3M™ Roloc™ Unitized Wheels, Roloc™+ Products, Brush and Disc Accessories	1" Diameter x 1/4" Shaft Diameter	25,000

## Accessories

Product Name	UPC	Qty./Case	For Use With	Size/Description	Max RPM
<b>Scotch-Brite™ Light Grinding and Blending Disc Accessories</b>					
<b>3M™ Disc Pad Face Plates</b>  51695	051144-14270-5	10	Light Grinding and Blending Discs	4-1/2" Diameter; Smooth; Hard – Black	13,300
	051144-81733-7			5" Diameter; Ribbed; Hard – Black	12,000
	051144-81732-0			5" Diameter; Ribbed; Extra Hard – Red	
	051144-80515-0			7" Diameter; Ribbed; Hard – Black	8,600
	051144-80514-3			7" Diameter; Ribbed; Extra Hard – Red	
<b>3M™ Hook-and-Loop Disc Pad Holder</b> 	051141-20245-7	1	Scotch-Brite™ Light Grinding and Blending Disc Accessories	7" x 7/8" Center Post; 5/8–11 INT	8,500
<b>Scotch-Brite™ Disc Accessories</b>					
<b>3M™ Hook-and-Loop Disc Pad Holders</b>  Disc Pad Holder No. 922 and 923 14470	048011-07494-8	10		2" (1/4" shank); Catalog No. 922	23,000
	048011-04132-2			3" (1/4" shank); Catalog No. 923	20,000
 Disc Pad Holder No. 924 369359	048011-07492-4	5		4" (1/4" shank); Catalog No. 924	13,000
 Disc Pad Holder No. 914 614622	048011-05674-6	1	Scotch-Brite™ Surface Conditioning Discs	4" x 1/8" x 3/8" 5/8–11 INT; Catalog No. 914	
 Disc Pad Holder No. 9145 and 915 215543	048011-14111-4			4-1/2" x 5/8–11 INT; Catalog No. 9145	
 Disc Pad Holder No. 905 51713	048011-09448-9			5" x 5/8–11 INT; Catalog No. 915	
 Disc Pad Holder No. 917 14469	048011-09450-2	5" x 5/16–24 EXT; Catalog No. 905		10,000	
 Disc Pad Holder No. 947TH 636899	051141-20279-2			7" x 5/8–11 INT; Catalog No. 917	6,000
 Disc Pad Holder No. 918 95288	048011-09451-9		7" x 1" x 5/8–11 INT; Catalog No. 947TH		
 Disc Pad Holder No. 918 95288	048011-09451-9		8" x 5/16" x 3/8" 5/8–11 INT; Catalog No. 918		
<b>3M™ TN Quick Change Disc Backup Pad</b>  352092	051111-56573-5	5	4-1/2" TN Discs	4-1/2" x 5/8–11 INT	13,300

## Accessories

Product Name	UPC	Qty./Case	For Use With	Size/Description	Max RPM
<b>Scotch-Brite™ Disc Accessories (cont.)</b>					
<b>Mandrels†</b>  Mandrel No. 933 1/4" Shaft Dia. Mandrel No. 934 1/2" Shaft Dia. 	048011-13968-5	5	Furnished complete with washers to fit available wheel and disc sizes†	Catalog No. 933 ; 2" x 1/4" x 1"	14,000
	048011-04021-9	1		Catalog No. 934 ; 3-1/16" x 1/4" x 2-1/2"	12,000
<b>3M™ Hookit™ Disc Pad</b> 	051131-05755-5	10	Scotch-Brite™ Coating Removal Discs	5" x 3/8" x 5/16-24 EXT	12,000
	051144-85096-9			5" x 5/8" x 5/8-11 INT	10,000
	051144-13625-4			5" x 3/4" x 5/16-24 EXT	
	051144-85105-8			5 x 3/4" x 5/8-11 INT	
	051144-13627-8	1		7" x 1" x 5/8-11 INT	6,000
<b>3M™ Stikit™ Disc Accessories</b>					
<b>3M™ Stikit™ Disc Pads</b> 	051131-05545-2	10	3M™ Stikit™ Discs	5" x 11/16" 5/16-24 EXT; Low Profile Finishing	12,000
	051131-05546-9			6" x 11/16" 5/16-24 EXT; Low Profile Finishing	10,000
	051131-05555-1			5" x 3/8" 5/16-24 EXT; Low Profile	12,000
	051131-05556-8			6" x 3/8" x 5/16-24 EXT; Low Profile	10,000
	051144-05575-3	1/10		5" x 3/4" x 5/16-24	10,000 (12,000 OPM)
	051144-05576-0			6" x 3/4" x 5/16-24	
	051144-05579-1	1		8" x 5/8-11 INT	3,000
	051111-55813-3	5		5" x 1/2" 5/8-11 INT	10,000
	051141-20351-5	10		5" x 3/8" x 5/16-24 EXT; Red Foam; Low Profile	12,000
	051141-20354-6			6" x 3/8" x 5/16-24 EXT; Red Foam; Low Profile	
	051144-81821-1	10		5" x 3/4" 5/16-24 EXT	10,000
	051144-82189-1			5" x 3/4" 5/8-11 INT	
	051144-88736-1			5" x 3/8" 5/16-24 EXT	
<b>3M™ PSA Disc Accessories</b>					
<b>PSA Disc Holder</b> 	051144-45070-1	10	Any air or electric grinding tool that accommodates a 1/4" shank; Supports 248D/348D PSA disc	2" Diameter	15,000
	051144-05510-4			3" Diameter	10,000
	051144-45068-8	5		5" Diameter	6,000

† Also for use with Unitized Wheels.

## Accessories

Product Name	UPC	Qty./Case	For Use With	Size/Description	Max RPM
<b>Unitized Wheel Accessories</b>					
<b>Mandrels</b> 	048011-04018-9	5	Scotch-Brite™ Unitized Wheels	Mandrel No. 936 ; 2-1/16" x 1/4" x 3/4"	22,200
	048011-15012-3			Mandrel No. 990 with 3" wheel; 1-3/4" x 1/4" x 1"	18,200
<b>Convolute Wheel Accessories</b>					
<b>Flange Adapter Kit No. 5</b> 	048011-16859-3	1 Set	6" Wheels; Telescoping wheel adapters 1" and 1/2" wide to reduce 1" wheel cores to fit 1/2", 5/8", 3/4", or 7/8" shafts; Must be used with side flanges	1" x 1/2" x 1/2"	N/A
	048011-16860-9			1" x 1" x 1/2"	
<b>Flap Wheel Accessories</b>					
<b>Wheel Adapter Kit No. 3</b> 	051144-45035-0	1	Two arbor hole (plug type) adapters for 6" and 8" diameter flap wheels	1" OD x 1/2" ID	N/A
	051144-45034-3			1" OD x 5/8" ID	
	051144-45033-6			1" OD x 3/4" ID	
	051144-45032-9			1" OD x 7/8" ID	
<b>Wheel Adapter Kit No. 81A</b> 	051144-45081-7	1	For T84 Flap Wheels	1/4" x 1/4–20 INT	N/A
<b>Star Accessories</b>					
<b>Mandrel No. 944</b> 	048011-13928-9	1	Scotch-Brite™ Stars for cleaning and polishing internal diameters of pipe and tubing	1/4" x 1/4–20 EXT	25,100
<b>Cross Buff Accessories</b>					
<b>3M™ Mandrel</b> 	048011-14307-8	1	Scotch-Brite™ Cross Buffs for cleaning and polishing internal diameters of pipe and tubing	1/4" x 8–32 EXT	Dependent upon abrasive product used
<b>Cartridge Roll Accessories</b>					
<b>3M™ Mandrels</b> 	051144-45119-7	25	Screw-type mandrels for securing cartridge rolls to tool	1/8" x 1" x 1/4"	24,000 (1/2" and smaller cartridge roll diameter); 16,000 (5/8"–3/4" cartridge roll diameter)
	051144-45117-3			3/16" x 1" x 1/4"	
	051144-45118-0			3/16" x 1-1/2" x 1/4"	
<b>Cross and Square Pad Accessories</b>					
<b>3M™ Square and Cross Pad Mandrel</b> 	051144-14308-5	1	Used for holding square and cross pads with 1/4–20 and 8–32 internal threaded inserts	1/4" x 1/4–20 EXT	Dependent upon abrasive product used
	051144-14307-8			1/4" x 8–32 EXT	
	051141-28385-2	5	1/4" x 3–48 EXT		



## Accessories

Product Name	UPC	Qty./Case	For Use With	Size/Description	Max RPM
<b>Band and Belt Accessories</b>					
<b>Rubber Slotted Expander Wheels</b> 	051144-77717-4	1	Slotted wheels for use with bands	1" x 1" x 1/4"	18,000
	051144-77718-1			1-1/2" x 1" x 1/4"	14,000
	051144-77720-4			2" x 1" x 1/4"	12,000
	051144-77721-1			2" x 2" x 1/4"	6,000
	051144-77722-8			3" x 3" x 5/8-INT	
	051141-28348-7			5" x 3-1/2" 5/8" Arbor Hole	N/A
	051141-28349-4			3-1/4" x 3" 5/8" Arbor Hole	
<b>Rubber Cushion Polishing Wheels</b> 	051144-45159-3	1	Use with bands when creating fine finishes	1/4" x 1/2" x 1/8"	23,000
	051144-45156-2			1/2" x 1/2" x 1/4"	15,000
	051144-45153-1			1/2" x 1" x 1/4"	
	051144-45152-4			1/2" x 1-1/2" x 1/4"	17,000
	051144-45145-6			3/4" x 1" x 1/4"	
	051144-45144-9			3/4" x 1-1/2" x 1/4"	10,000
	051144-45139-5			1" x 1" x 1/4"	18,000
	051144-45138-8			1" x 1-1/2" x 1/4"	10,000
	051144-45132-6			1-1/2" x 1" x 1/4"	14,000
	051144-45131-9			1-1/2" x 1-1/2" x 1/4"	10,000
	051144-45130-2			1-1/2" x 2" x 1/4"	8,000
	051144-45129-6			2" x 1" x 1/4"	11,000
	051144-45127-2			2" x 2" x 1/4"	6,000
	051144-45124-1			3" x 3" x 3/8"	3,000
	051144-45123-4			3" x 3" x 1/2"	
	<b>Utility Cloth Sheet and Roll Accessories</b>				
<b>Forked Spindle</b> 	051144-45121-0	10	For attaching utility cloth strips	1/4" x 3"	N/A
<b>Wetordry™ Accessories</b>					
<b>3M™ Wetordry™ Sponge Pad</b>	051131-05526-1	50	Wetordry™ Paper Sheets	2-3/4" x 5-1/2" x 3/8"	N/A
<b>3M™ Stikit™ Soft Hand Pad</b>	051144-05530-2	5/10	Stikit™ Sheet Rolls		
<b>Scotch-Brite™ Hand Pad Accessories</b>					
<b>Scotch-Brite™ Pad Holder No. 961</b> 	048011-09493-4	10	Scotch-Brite™ Hand Pads; Provides increased leverage and eliminates "finger" marks	3-1/2" x 4-3/4"	N/A
<b>Scotch-Brite™ Roll Accessories</b>					
<b>Mini Mandrel No. 935</b> 	048011-04020-2	5	Scotch-Brite™ Strips to clean and polish inner diameters and other tight areas	2-7/8" x 1/4"	14,000



### 3M™ Bonded Wheel Selection Guide

Select Bonded Type 27 Wheels for a high rate of stock removal and long life. For use on all metals.

**DO NOT USE ON TOOLS WITHOUT GUARDS.**

	Product	Mineral	Type
All Metals	Better General Purpose	Aluminum Oxide	T27
			T27 Flexible
	Best 3M™ Green Corps™	3M™ Ceramic abrasive grain	T27 Cut and Grind
			T27

### 3M™ Bonded Type 27 Wheels

3M™ Green Corps™ Wheels feature:



**DO NOT USE BONDED WHEELS ON TOOLS WITHOUT GUARDS.**



#### 3M™ General Purpose Wheel

- Aluminum Oxide Mineral
- Durable wheel provides exceptionally long life at a value price



UPC	Grade	Max. RPM	Dia. x Thk. x AH	Qty./Case
051135-92312-2	24	13,300	4-1/2" x 1/4" x 7/8"	40
051135-92314-6			4-1/2" x 1/4" x 5/8-11 INT	
051135-92313-9	24	8,500	7" x 1/4" x 7/8"	20
051135-92315-3			7" x 1/4" x 5/8-11 INT	

**For safe applications using cut-off wheels, refer to ANSI B-7.1 for details. ALWAYS use appropriate wheel guards. Refer to ANSI B-186.1 for guarding requirements.**

#### 3M™ Green Corps™ Flexible Grinding Wheel

- 3M™ Ceramic abrasive grain
- Can be used on a wide variety of metals
- Wheels produce less noise and vibration when grinding



UPC	Grade	Max. RPM	Dia. x Thk. x AH	Qty./Case
051111-50440-6	36	13,300	4-1/2" x 1/8" x 7/8"	20/40
051111-50442-0	46			
051111-50443-7	60			
051111-50444-4	80	8,500	7" x 1/8" x 7/8"	20/20
051111-50445-1	36			
051111-50446-8	46			
051111-50447-5	60			

#### 3M™ Green Corps™ Depressed Center Wheel

- 3M™ Ceramic abrasive grain
- Provides exceptionally fast cut and long life



148220

UPC	Grade	Max. RPM	Dia. x Thk. x AH	Qty./Case
051111-55991-8	24	13,300	4-1/2" x 1/4" x 7/8"	40
051111-55992-5	36			
051111-55960-4	24		4-1/2" x 1/4" x 5/8-11 INT	
051111-55961-1	36	8,500	7" x 1/4" x 7/8"	20
051111-55989-5	24			
051111-55990-1	36			
051111-55958-1	24	8,500	7" x 1/4" x 5/8-11 INT	20
051111-55959-8	36			

#### 3M™ Green Corps™ Cutting and Grinding Wheel

- 3M™ Ceramic abrasive grain
- Safe to grind outer face and cut with edge of same wheel



UPC	Grade	Max. RPM	Dia. x Thk. x AH	Qty./Case
051135-92316-0	36	13,300	4-1/2" x 1/8" x 7/8"	40
051135-92318-4			4-1/2" x 1/8" x 5/8-11 INT	
051135-92317-7	36	8,500	7" x 1/8" x 7/8"	20
051135-92319-1			7" x 1/8" x 5/8-11 INT	

See pages 67-72 for available accessories.

## 3M™ Cut-Off Wheels

	Product	Mineral	Type	
<b>All Metals</b>	<b>Better</b>	<b>General Purpose</b>	Aluminum Oxide	T1
	<b>Best</b>	<b>3M™ Green Corps™</b>	3M™ Ceramic abrasive grain	T1
		<b>High Performance</b>		T1

### 3M™ General Purpose Cut-Off Wheels

- Value priced wheel provides fast cut and long life
- Best on carbon steel
- **Do not use on tools without guards**
- Must be used with ANSI-approved flanges for Type 1 cut-off wheels

UPC	Max. RPM	Dia. x W x AH	Min./Case
051141-20447-5	10,200	6" x .045" x 7/8"	50/100
051141-20448-2	21,000	4" x 1/32" x 3/8"	
051141-20449-9		4" x 1/16" x 3/8"	

### 3M™ High Performance Cut-Off Wheel

- 3M™ Ceramic abrasive grain
- Provides faster cut and longer life on various substrates including stainless steel
- **Do not use on tools without guards**
- Must be used with ANSI-approved flanges for Type 1 cut-off wheels

UPC	Max. RPM	Dia. x W x AH	Min./Case
051141-20349-2	10,200	6" x .045" x 7/8"	50/200

### 3M™ Green Corps™ Cut-Off Wheels

- 3M™ Ceramic abrasive grain
- Provides high cut rates and long life on various substrates, including fiberglass, stainless steel and carbon steel
- **Do not use on tools without guards**
- Must be used with ANSI-approved flanges for Type 1 cut-off wheels



213792

UPC	Max. RPM	Dia. x W x AH	Qty./Case
051144-83487-7	42,000	2" x 1/16" x 1/4"	50/50
051144-82238-6	35,000	3" x 1/32" x 1/4"	
051131-01989-8	35,000	3" x 1/32" x 3/8"	5 wheels/pack 10 packs/case
051131-01985-0			50/50
051131-01990-4	28,000	3" x 1/16" x 3/8"	5 wheels/pack 10 packs/case
051131-01986-7			50/50
051144-83488-4	21,000	4" x 1/16" x 3/8"	50/50
051144-88755-2	26,250	4" x 1/32" x 1/4"	
051131-01994-2	26,250	4" x 1/32" x 3/8"	50/50
051141-20275-4	13,300	4-1/2" x 3/64" x 7/8"	50/200
051141-20276-1	12,200	4-59/64" x 3/64" x 7/8"	

For safe applications using cut-off wheels, refer to ANSI B-7.1 for details. ALWAYS use appropriate wheel guards. Refer to ANSI B-186.1 for guarding requirements.

See pages 67–72 for available accessories.














## Dressing and Truing Tools Selection Guide

Natural diamond stone set in steel shanks of various shapes for straight or form dressing.

Applications: Truing and dressing of conventional grinding wheels, and occasionally used on resin bond and vitrified CBN wheels. Industries used in are aerospace, automotive, bearing, tool manufacturing, die manufacturing, foundries, grinding services, medical device manufacturing, oil and gas exploration, powertrain and toolroom.

Configurations: Single-point, multi-point, chisel shape, straight, angle, cylindrical, conical

Dressing Tool Type — Diamond Mineral	Shank Diameter	Schematics	Dressing Applications			Carat Weight														
			Light Duty (Internal Radii)	Medium Duty (Conventional Wheels)	Heavy Duty (Ceramic Wheels)															
Impregnated	7/16"	<b>15°</b>  Type 2A6E7																		
		 Type 1A6C7																		
		<b>Straight</b>  Type 2A6D7																		 Type 1A6A7
		<b>Cylindrical, Straight Round</b>  Type 1R6J7	 Type 2R6K7																	
Multi-point	7/16"	 Type CL5S1 DIAMOND CLUSTER 4 EQ SP & 1 IN CENTER	 Type CL7S1 DIAMOND CLUSTER 6 EQ SP & 1 IN CENTER																	
Phono-point	1/8"	<b>Max. Tip Radius — 0.005"</b> 																		
Single-point Non-resettable (Standard Grade)	3/8"/ 7/16"																			
Single-point Non-resettable (Premium Grade)	3/8"/ 7/16"																			

We have many different sizes and shapes of stationary dressing tools available. Your 3M Customer Service Representative will work with you to determine the best ones for your operation. Call 3M's experts at 1800-736-2500.


## Dressing and Truing Tools

### 3M™ Single-Point Dressing Tool — Standard

- A standard-quality natural diamond tip set in a steel shank
- Non-resettable, general purpose dresser



UPC	Type	Shank D x L, Angle	Carat Weight	Min./Case
<b>Standard Grade Diamond Abrasive</b>				
051115-20793-8	TR2S6	3/8" x 2", 45°	.25 ct	1
051115-20795-2	TR3S6		.33 ct	
051115-20797-6	TR5S6		.50 ct	
051115-20799-0	TR7S6		.75 ct	
051115-20801-0	TR10S6		1.00 ct	
051115-20794-5	TR2S7	7/16" x 2", 45°	.25 ct	
051115-20796-9	TR3S7		.33 ct	
051115-20798-3	TR5S7		.50 ct	
051115-20800-3	TR7S7		.75 ct	
051115-20802-7	TR10S7		1.00 ct	




### 3M™ Phono-Point Dressing Tools

- Sharp, sturdy, ground diamond point for internal radii dressing applications
- Available in 60°, 75° or 90° included angles; maximum 0.005" tip radius



UPC	Type	Shank D x L, Angle	Min./Case	
<b>Max. Tip Radius — 0.005"</b>				
051115-20790-7	P0560S2	 1/8" x 1", 60°	1	
051115-20791-4	P0575S2			1/8" x 1", 75°
051115-20792-1	P0590S2			1/8" x 1", 90°




### 3M™ Single-Point Dressing Tool — Premium

- A premium-quality natural diamond tip set in a steel shank
- Non-resettable tool is more durable than the standard-quality version
- Used on ceramic grain wheels and other difficult-to-dress wheels



UPC	Type	Shank D x L, Angle	Carat Weight	Min./Case
<b>Premium Grade Diamond Abrasive</b>				
051115-20803-4	TR3P6	3/8" x 2", 45°	.33 ct	1
051115-20805-8	TR5P6		.50 ct	
051115-20804-1	TR3P7	7/16" x 2", 45°	.33 ct	
051115-20806-5	TR5P7		.50 ct	



### 3M™ Multi-Point Diamond Dresser

- Contains whole natural diamonds
- Used in severe dressing applications for heavy stock removal
- For straight dressing where single-point tools are not economical





UPC	Description	Head Diameter	Carat Weight	Min./Case
<b>Type Jr.</b>				
051115-28466-3	Used on 7" and 8" wheels	1/2"	3 ct	1
<b>Type 2 and 8</b>				
051115-28465-6	Used on a #2 Cincinnati centerless, using an 8" wheel	5/8"	6 ct	1
<b>Type CC</b>				
051115-28464-9	Used on centerless, cylindrical, and surface grinders, using wheels 10" in diameter or larger	1"	6 ct	1

## Dressing and Truing Tools (cont.)

### 3M™ Multi-Point Dressing Tool

- Five or seven high-quality diamonds configured in a single layer; metal bond matrix
- For dressing applications requiring the highest removal rates









UPC	Type	Shank D x L	Min./Case
051115-20788-4	CL5S1 	7/16" x 1"	1
051115-20789-1	CL7S1 		

### 3M™ Impregnated Grit Dressing Tool

- Durable diamond grit in a metal bond matrix in straight or offset configurations
- Designed for common dressing applications




UPC	Type	Size	Min./Case
<b>15° Angle</b>			
051115-20781-5	2A6E7 	1/2" x 1/4" x 3/8" (7/16" Shank Dia.)	1
051115-20783-9	1A6C7 	3/4" x 1/4" x 5/16" (7/16" Shank Dia.)	
<b>Straight</b>			
051115-20782-2	2A6D7 	1/2" x 1/4" x 3/8" (7/16" Shank Dia.)	1
051115-20784-6	1A6A7 	3/4" x 1/4" x 5/16" (7/16" Shank Dia.)	
<b>Cylindrical, Straight Round</b>			
051115-20786-0	1R6J7 	1/4" x 3/8" (7/16" x 1-1/2" Shank)	1
051115-20787-7	2R6K7 	3/8" x 1/2" (7/16" x 1-1/2" Shank)	

## Abrasive Grade Comparison Guide

Ind'l Mesh-ANSI	FEPA "P"	Trizact™	Micron (μ)	Scotch-Brite™ Grade*
12				
	P12			
	P16			
16				
	P20			
20				
	P24			
24				
	P30			
30				
36				
	P36			
40				
	P40			
50		A500		
	P50			
60		A400		
	P60			
	P80	A300		
80			180	
	P100	A200	150	
100				Extra Coarse
	P120	A160	120	
120				Coarse
	P150	A130		
		A110		
150				Medium
180	P180	A100	80	
220				
	P220	A90		
		A80	60	
	P240	A75		
240		A65		Fine
	P280			
		A60	50	
	P320			
280			40	
	P360			
320				Very Fine
	P400	A45	35	
	P500		30	
360				
400		A30		
	P800	A25	22	
			20	
500				
	P1000	A20	18	
600				Super Fine
	P1200	A16		
			15	
	P1500	A10		
800			12	
	P2000		10	
1000				Ultra Fine
			9	
	P2500			
		A7		
1200		A6		
		A5	5	Microfine
1500		A3	3	
2000			1	

## Scotch-Brite™ Product Guide

### Density Number (prefix to mineral)



### Mineral Abbreviations (prefix to grade)


- A—Aluminum Oxide mineral
- S—Silicon Carbide mineral
- T—Talc mineral

### Grade Abbreviations

- ULF—Ultra Fine
- SFN—Super Fine
- VFN—Very Fine
- FIN—Fine
- MED—Medium
- CRS—Coarse
- XCS—Extra Coarse

### Example:

2S MED = Soft Density,  
Silicon Carbide Mineral,  
Medium Grade



### Measurement Conversions:

- 1 inch = 25.4 millimeters
- 1 millimeter = 0.039370 inches
- 1 micron (μ) = 0.000039 inches

ANSI—American National Standards Institute

FEPA—Federation of European Producers of Abrasives Products

\*Scotch-Brite™ Surface Conditioning Grade (Generates finish approximately equivalent to indicated coated abrasive grade.)

## 3M™ Adhesive Selection Guide

	<b>Structural Adhesives:</b> Each adhesive has high cohesive strength to bond high strength materials and potentially replace mechanical fasteners.		<b>Non-Structural Adhesives</b>	
<b>Metal to:</b>	<b>3M™ Scotch-Weld™ Epoxy, Acrylic Adhesives</b>	<b>3M™ Scotch-Weld™ Instant Adhesives</b>	<b>3M™ Scotch-Weld™ Adhesives</b>	<b>3M™ Aerosol Adhesives</b>
<b>Metal</b>	Acrylics, Epoxies	CA40H	1357, 1099 (All), 1300	80, 90
<b>EPDM Rubber</b>	—	CA40H	4799	—
<b>Rubber (except EPDM)</b>	Flexible 2-part Epoxies	CA40H	1300, 847	80, 90*
<b>Glass and Ceramics</b>	Flexible 2-part Epoxies	—	1357	80, 90
<b>Leather</b>	Flexible 2-part Epoxies	—	847	80
<b>Plastics (Polyolefins)</b>	DP8005	—	—	90
<b>Plastics (ABS, PVC, Acrylic, etc.)</b>	DP8005	CA40H	1357	77, 80, 90
<b>Plastics (High Performance Nylon)</b>	DP460	CA40H	1099 (All)	77, 80, 90
<b>Plastics (Flexible Vinyl)</b>	Flexible 2-part Epoxies	CA40H	1099 (All)	80
<b>Paper and Cardboard</b>	2-part Epoxies	—	10	77
<b>Fabric, Felt, Cork and Fibrous Glass</b>	2-part Epoxies	—	—	74, 77, 80, 90
<b>Flexible Foam (Latex, Urethane)</b>	—	—	—	74, 90
<b>Rigid Foam (Beadboard, Styrene)</b>	Flexible 2-part Epoxies	—	—	—
<b>Rigid Foam (Urethane)</b>	Flexible 2-part Epoxies	CA40H	1357, 5, 10	74, 80

Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes. Final product selection should be made only after consideration of a variety of factors and evaluations of sample bonds.

\*Produces a temporary bond on these materials. (1) Adhesives must be force dried and bonded while warm. (2) For best results, preheat the substrate to a minimum of 120°F (49°C). (3) Evaluate usage surface activator.









## 3M™ Non-Structural Adhesives

### 3M™ Aerosol Adhesives

Only a finger's touch puts a job-matched formulation to work on paper, plastic, cardboard, foam, metal and more. 3M Aerosol Adhesives contain no methylene chloride, chlorofluorocarbons (CFCs), or 1,1,1-trichloroethane (methyl chloroform) and are California compliant.



399143

Product Number/Description	Spray Width	Bonding Range Surfaces One/ Both	(PSI) Shear <sup>1</sup> Initial/ Ultimate	Relative Adhesion		Coverage Sq. Ft/ Container <sup>4</sup> (Typical)	Color	Size	UPC (021200-)	Qty./ Case
				Peel Strength (PIW) <sup>2</sup>	Temperature Resistant <sup>3</sup>					
<b>3M™ FoamFast 74 Spray Adhesive</b>										
 <ul style="list-style-type: none"> <li>Fast tack with foam-tearing strength</li> <li>Soft, non-dimpling glue line</li> <li>General upholstery foam bonding</li> <li>Knife edge bonding, boxing, edge turning</li> <li>Bonds flexible urethane or latex foam together or to wood, metal and plastic</li> </ul>	1" – 4" variable	N/R/ 15 min.	40/205	20	120°F (49°C)	260	Inverted Orange	24 fl. oz. can	07277-6	12
							Clear		50045-9	
							Original Formula Orange		96316-2*	
<b>3M™ Super 77™ Multipurpose Spray Adhesive</b>										
 <ul style="list-style-type: none"> <li>Fast, aggressive tack for bonding many lightweight materials</li> <li>High coverage</li> <li>Low soak-in for long lasting bonds</li> <li>Bonds gaskets in water pumps, and attaches insulation to sheet metal</li> </ul>	1-1/2" – 4" fan	15 min./ 30 min.	25/160	15	110°F (43°C)	220	Original Formula	24 fl. oz. can	96315-5*	12
							Low Mist		21210-9	
<b>3M™ Rubber &amp; Vinyl 80 Spray Adhesive</b>										
 <ul style="list-style-type: none"> <li>Neoprene-based contact adhesive with plasticizer resistance</li> <li>Adheres stainless steel panels, stiffeners, metal kick plates, leather and most supported vinyl, plastics, laminates, wood products and rubbers (except EPDM)</li> </ul>	3"	N/R/ 1 hr.	50/400	35	200°F (93°C)	75/30 <sup>4</sup>	—	24 fl. oz. can	82618-4	6
<b>3M™ Hi-Strength 90 Spray Adhesive</b>										
 <ul style="list-style-type: none"> <li>High contact bond for decorative laminate</li> <li>Adheres to polyethylene and polypropylene to wood, metal and more</li> <li>One minute dry time</li> </ul>	1" – 4" variable	N/R/ 15 min.	45/230	25	160°F (71°C)	100	—	24 fl. oz. can	07278-3	12

1 ATD T.M. C-700: 1/8" birch veneer bonded to 1/8" birch veneer

2 ATD T.M. C-449

3 ATD T.M. C-483: 500 g load for 1 hr. at noted temperature

4 Plastic laminate bonding @ 3-5 g/sq. ft. coverage





5 Coverage based on container sizes 24 fluid ounce or 16 fluid ounce size cans

N/R = Not Recommended

\* NOT FOR SALE IN CALIFORNIA

## 3M™ Non-Structural Adhesives (cont.)

**3M™ Scotch-Weld™ Plastic Adhesives:** The Scotch-Weld™ Adhesive is a tool designed adhesive designed to provide innovative answers to a wide variety of non-structural bonding problems.

Product Number/Description	Solids Weight (Approx.)	Flash Point (Closed Cup)	Consistency	Color Dry Film	Application Method	Bonding Range	Overlap Shear Strength (PSI)		Peel Strength (PSI)	Size	UPC (021200-)	Qty./Case
							75°F (24°C)	180°F (82°C)	75°F (24°C)			
<b>3M™ Scotch-Weld™ High Performance Plastic Adhesives</b>												
<b>1099</b>												
<ul style="list-style-type: none"> <li>Fast drying and heat curable</li> <li>Resists weathering, water, oil, plasticizer migration, aliphatic fuels</li> <li>Meets MIL-A-13883B, Type 1 and MMM-A-189C, Class 2</li> <li>A very strong plastic adhesive</li> <li>Bonds most plastic and vinyl</li> </ul>												
 55581	32%	0°F (-18°C)	Medium Liquid	Light Tan	Brush, Flow	Up to 40 min.	1306 <sup>1,2</sup>	643 <sup>1,2</sup>	31 <sup>3</sup>	5 oz. tube	<b>19808-3</b>	36
<b>1099L</b>												
<ul style="list-style-type: none"> <li>Lower viscosity</li> <li>Sprayable version of 1099 Adhesive</li> </ul>												
	24%	0°F (-18°C)	Thin Liquid	Tan	Spray, Brush	Up to 20 min.	1306 <sup>1,2</sup>	643 <sup>1,2</sup>	31 <sup>3</sup>	5 gal. pail	<b>22578-9</b>	1
<b>4693H</b>												
<ul style="list-style-type: none"> <li>Clear, elastomeric adhesive</li> <li>Exceptional adhesion to metal and plastic</li> <li>Unique in its ability to bond hard-to-hold materials like polypropylene, polyethylene and high impact polystyrene</li> </ul>												
 55575	36%	1°F (-17°C)	Medium Liquid	Clear	Flow, Brush	Up to 60 min.	—	—	22 <sup>3</sup>	5 oz. tube	<b>30088-2</b>	36
<b>3M™ Scotch-Weld™ High Performance Rubber and Gasket Adhesives</b>												
<b>847</b>												
<ul style="list-style-type: none"> <li>Quick drying and flexible with fuel and oil resistance</li> <li>Heat and solvent reactivatable</li> <li>Curable with heat</li> </ul>												
 55587	36%	0°F (-18°C)	Medium Liquid	Brown	Flow, Brush	Up to 15 min.	200 <sup>4</sup>	9 <sup>4</sup>	40 <sup>3</sup>	5 oz. tube	<b>19718-5</b>	36
1 Quart										<b>19721-5</b>	12	
<b>1300</b>												
<ul style="list-style-type: none"> <li>High immediate strength</li> <li>Fast-drying and heat resistant for rubber and metal</li> </ul>												
 375385	37%	-14°F (-26°C)	Medium Liquid	Yellow	Flow, Brush	Up to 12 min.	549 <sup>1</sup>	136 <sup>4</sup>	52 <sup>3</sup>	5 oz. tube	<b>19868-7</b>	36
<b>3M™ Scotch-Weld™ Industrial Adhesive</b>												
<b>4799</b>												
<ul style="list-style-type: none"> <li>Brushable paste consistency with low soak-in on porous surfaces</li> <li>Can bond EPDM rubber</li> </ul>												
	36%	-14°F (-26°C)	Thin Paste	Black	Brush, Trowel	Up to 15 min.	—	—	28 <sup>3</sup>	5 oz. tube	<b>21354-0</b>	36

Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.

1 Aluminum to aluminum @ 0.1 inches/minute

2 Bonds heat cured for 15 minutes @ 324°F (162°C), 150 PSI

3 Canvas to cold rolled steel @ 2.0 inches/minute separation rate

4 Birch plywood to birch plywood @ 0.1 inches/minute separation rate



### 3M™ Non-Structural Adhesives (cont.)

#### 3M™ Scotch-Weld™ Neoprene Contact Adhesives

This line offers a wide range of choices for contact adhesives applications. Select from bonding ranges, strengths, solids contents and solvent formulations to meet requirements for bonding laminate, foam and more.

Product Number/ Description	Solids Weight (Approx.)	Flash Point (Closed Cup)	Consis- tency	Color Dry Film	Applic- ation Method	Bonding Range	Overlap Shear Strength (PSI)		Peel Strength (PSI)	Color	Size	UPC (021200-)	Qty./ Case
							75°F (24°C)	180°F (82°C)	75°F (24°C)				
<b>3M™ Scotch-Weld™ Neoprene Contact Adhesive 5</b>													
<ul style="list-style-type: none"> <li>• Rapid strength buildup</li> <li>• Heat and creep resistant bond</li> <li>• Bonds many high pressure plastic laminates to metal and other surfaces</li> </ul>	19%	-14°F (-26°C)	Thin Liquid	Green, Light Yellow	Spray	30 min. max.	482 <sup>1</sup>	65 <sup>1</sup>	19 <sup>2</sup>	Green	5 Gal. Pail	21232-1	1
										Light Yellow		20333-6	
<b>3M™ Scotch-Weld™ Neoprene Contact Adhesive 10</b>													
<ul style="list-style-type: none"> <li>• Similar performance to 5</li> <li>• Brushable with higher coverage</li> <li>• Bonds aluminum, steel, rubber and other porous and non-porous materials to each other or to themselves</li> </ul>	22%	-14°F (-26°C)	Thin Liquid	Light Yellow	Brush, Roller	30 min. max.	482 <sup>1</sup>	65 <sup>1</sup>	19 <sup>2</sup>	Light Yellow	1 Quart	20272-8	12
											1 Gal.	20274-2	4
											5 Gal. Pail	20276-6	1
<b>3M™ Scotch-Weld™ Neoprene High Performance Contact Adhesive 1357</b>													
<ul style="list-style-type: none"> <li>• Rapid buildup to a very high strength bond for metal</li> <li>• Resists heat and continuous load stress</li> <li>• Adheres well to metal, rubber, wood and glass</li> </ul>	25%	-14°F (-26°C)	Thin Liquid	Gray- green, Light Yellow	Brush, Spray	30 min. max.	536 <sup>1</sup>	199 <sup>1</sup>	42 <sup>2</sup>	Gray Green	5 oz. tube	19887-8	36
											1 Pint	19890-8	12
											1 Gal.	19894-6	4
												22586-4	
											5 Gal. Pail	19897-7	1
64963-9													

1 Birch plywood to birch plywood @ 0.1 inches/minute separation rate  
 2 Canvas to cold rolled steel @ 2.0 inches/minute separation rate

## 3M™ Non-Structural Adhesives (cont.)

### 3M™ Sealants

Help keep air, dirt, fuel, cold, heat or other elements in or out, you'll find formulations from acrylic to polyurethane.



87965

Product Number/Description	Solids Weight (Approx.)	Flash Point (Closed Cup)	Consistency	Color (Dry)	Application Method	Cure or Dry Time	Service Temperature Range	Size	UPC (02100-)	Qty./Case
<b>3M™ Polyurethane Sealant 540</b>										
<ul style="list-style-type: none"> <li>• Polyurethane</li> <li>• One-component</li> <li>• Moisture cures rapidly to flexible seal/bond for many plastics, metal, wood and more</li> <li>• 250 psi tensile strength</li> </ul>	90%	136°F (58°C)	Mastic	Gray	Hand or Pressure Caulk	24 hours (3/16" dia. bead)	-40° to 194°F (-40° to 90°C)	10.5 oz. cartridge	<b>41594-4</b>	12
								400ml sausage pack	<b>96277-6</b>	
<b>3M™ Polyurethane Adhesive Sealant 560</b>										
<ul style="list-style-type: none"> <li>• Similar to 540 but with 580 psi tensile strength</li> <li>• May replace mechanical fasteners</li> </ul>	90%	136°F (58°C)	Mastic	Gray	Hand or Pressure Caulk	24 hours (3/16" dia. bead)	-40° to 194°F (-40° to 90°C)	1/10 gallon cartridge	<b>41596-8</b>	12
<b>3M™ Scotch-Seal™ Tamper Proof Sealant 1252</b>										
<ul style="list-style-type: none"> <li>• Fire retardant seal</li> <li>• Resists oil, gasoline, water, jet fuel and fungus</li> <li>• Will not corrode metal</li> <li>• Tack-free in 20 seconds</li> </ul>	70%	20°F (-7°C)	Thin Paste	White	Pressure-Flow Gun	24 hours (1/8" dia. bead)	-20° to 250°F (-29° to 121°C)	5 oz. tube	<b>20193-6</b>	36
<b>3M™ Scotch-Seal™ Metal Sealant 2084</b>										
<ul style="list-style-type: none"> <li>• Seals metal to glass in windows and doors</li> <li>• Resists weather, water, oil and gasoline</li> </ul>	46%	0°F (-18°C)	Heavy Liquid	Aluminum	Brush or Flow	24 hours (1/8" dia. bead)	-30° to 250°F (-34° to 121°C)	5 oz. tube	<b>20227-8</b>	36

Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.

## 3M™ Structural Adhesives



### 3M™ Scotch-Weld™ Epoxy and Acrylic Adhesives

Used as an alternative for mechanical or fusion fastening due to its greater design latitude, cleaner lines, lighter weight, greater durability, less machining and often less cost.

Product Number/Color/Description	Mix Ratio (Vol) B:A	Approx. <sup>2</sup> Viscosity 75°F (24°C) (CPS)	Approx. <sup>3</sup> Worklife at 75°F (24°C)	Ave. T-Peel <sup>4</sup> at 75°F (24°C) (PIW)	Overlap Shear Strength <sup>5</sup> (PSI)			Size	UPC (021200-)	Qty./Case
					-67°F (-55°C)	75°F (24°C)	180°F (82°C)			
<b>Epoxy</b>										
<b>3M™ Scotch-Weld™ Epoxy Adhesive DP100 Clear</b>										
<ul style="list-style-type: none"> <li>• Fast cure rigid epoxy</li> <li>• 15–20 minute handling strength</li> <li>• Transparent when cured</li> </ul>	1:1	13,000	4 min.	2	900	1500	300	1.7 fl. oz	<b>22648-9</b>	12

### 3M™ Structural Adhesives (cont.)

Product Number/Color/ Description	Mix Ratio (Vol) B:A	Approx. <sup>2</sup> Viscosity 75°F (24°C) (CPS)	Approx. <sup>3</sup> Worklife at 75°F (24°C)	Ave. T-Peel <sup>4</sup> at 75°F (24°C) (PIW)	Overlap Shear Strength <sup>5</sup> (PSI)			Size	UPC (021200-)	Qty./ Case
					-67°F (-55°C)	75°F (24°C)	180°F (82°C)			
<b>Epoxy</b>										
<b>3M™ Scotch-Weld™ Epoxy Adhesive DP100 Plus Clear</b>										
<ul style="list-style-type: none"> <li>Higher peel and shear strength version of 178-100</li> </ul>	1:1	8,500	4 min.	10	3000	3500	200	1.7 fl. oz.	<b>87195-5</b>	12
<b>3M™ Scotch-Weld™ Epoxy Adhesive DP420 Off-White</b>										
<ul style="list-style-type: none"> <li>Medium worklife, toughened epoxy</li> <li>1–2 hours handling strength</li> <li>Tough, durable structural bonds</li> <li>Very high performance, two-part epoxy adhesive</li> <li>Great for bonding metal, plastic and wood</li> </ul>	2:1	30,000	15 min.	50	4500	4500	1260	1.2 fl. oz.	<b>82236-0</b>	12
<b>3M™ Scotch-Weld™ Epoxy Adhesive 2216 B/A Gray</b>										
<ul style="list-style-type: none"> <li>Long worklife flexible epoxy</li> <li>8–12 hrs. handling strength</li> <li>Bonds plastic, metal and other dissimilar materials</li> </ul>	2:3	80,000	90 min.	25	2000	2500	400	Quart Kit	<b>20356-5</b>	6
<b>3M™ Scotch-Weld™ Epoxy Adhesive DP460 Off-White</b>										
<ul style="list-style-type: none"> <li>Long worklife toughened epoxy</li> <li>2–4 hours handling strength</li> <li>Very high performance epoxy adhesive</li> <li>Great for bonding a wide variety of materials with outstanding reliability and durability</li> </ul>	2:1	30,000	60 min.	60	4500	4500	700	1.25 fl. oz.	<b>82225-4</b>	12
<b>Acrylic</b>										
<b>3M™ Scotch-Weld™ Low Odor Acrylic Adhesive DP810 Black, Tan</b>										
<ul style="list-style-type: none"> <li>Acrylic bonds many metals and plastics without surface prep</li> <li>Fast strength buildup</li> <li>Fully cured in 8 hours</li> <li>Low odor</li> <li>High peel and shear strength on slightly oily steel, aluminum, glass and painted surfaces</li> </ul>	1:1	18,000 – 30,000	8–10 min.	30	1200	3600	500	1.7 fl. oz.	<b>49077-4 (Black)</b>	12
									<b>31310-3 (Tan)</b>	
<b>3M™ Scotch-Weld™ Low Odor Acrylic Adhesive DP810NS Clear</b>										
<ul style="list-style-type: none"> <li>Non-sag version of DP810</li> <li>10-15 minute handling strength</li> </ul>	1:1	90,000 – 95,000	8–10 min.	20	1200	4000	500	1.7 fl. oz.	<b>49082-8</b>	12
<b>3M™ Scotch-Weld™ Structural Plastic Adhesive DP8005 Translucent, Black</b>										
<ul style="list-style-type: none"> <li>2-part acrylic adhesive bonds to polyethylene and polypropylene with no surface preparation</li> <li>Tough bond strength to resist vibration and impact</li> <li>Bonds most difficult-to-bond LSE (low surface energy) plastics</li> </ul>	10:1	27,500	2.5–3 min.	16	—	2000	300	35mL	<b>41547-0 (Translucent)</b>	12
									<b>45167-6 (Black)</b>	

Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.

1 Color is mixed if two-part product

2 Brookfield viscometer viscosity values are typical values for the mixed product

3 The time during which an adhesive will adequately wet-out on a substrate

4 180° peel tested on .030" aluminum per ASTM D 1876-61T

5 Tested per ASTM D 1002-64

## 3M™ Structural Adhesives (cont.)

### 3M™ EPX Applicators & Accessories

Mixing nozzle will perform to your requirements. With consistent air pressure for easy uniform application, the Duo-Pak cartridge will give you the flow rate needed. Fast, convenient way to simultaneously meter, mix and apply two-part adhesives and potting compounds. System features handy Duo-Pak Adhesive Cartridges that snap quickly into the durable, lightweight EPX applicator. A slight squeeze on the trigger advances the plunger into the cartridge. Accurate measurement and the mixing nozzle provides thorough mixing and precise placement of material. Ideal system for assembly, maintenance and in-field service.



189875


Product Number/Description	Size	UPC (021200-)	Qty./Case
3M™ EPX Metal Applicator #9470 with 2:1 Plunger	50mL	<b>21789-0</b>	10
3M™ EPX 50mL Pneumatic Applicator with 2:1 Plunger	50mL	<b>83528-5</b>	1
3M™ EPX Plus II Applicator with 2:1 and 1:1 Plunger (manual)	50mL	<b>50004-6</b>	10
3M™ EPX Plus II Square Gold Mixing Nozzle	127mm	<b>97331-4</b>	36
3M™ EPX Mixing Nozzle #9742 for 50ml applicator	50mL	<b>21791-3</b>	72
3M™ EPX 2:1 Plunger Assembly for 50ml applicator	—	<b>82314-5</b>	10



314765

### 3M™ Scotch-Weld™ Instant Adhesive

For speed and performance, you'll find a product with the right combination of bond strength, cure time and viscosity.

Product Number/ Description	Base	Time <sup>1</sup> to Handling Strength (sec.)	Viscosity (CPS)	Ave. T-Peel <sup>2</sup> at 75°F (24°C) (PIW)	Overlap Shear Strength <sup>3</sup> at 75°F (24°C) (PSI)						Size	UPC (021200-)	Qty./ Case
					Steel	Alumi- num	Nitrile Rubber	Neoprene Rubber	APS	Rigid PVC			
<b>CA40H</b>													
<ul style="list-style-type: none"> <li>• Better void filling capabilities</li> <li>• Good adhesion to aluminum, EPDM, rubber and flexible vinyl</li> <li>• Good resistance to soap solutions and isopropyl alcohol</li> </ul>													
	Ethyl	5–40	400–600	1–2	1500	1500	35*	55*	900*	1000*	1 oz.	<b>21073-0</b>	12

Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.

1 The time it takes assembled parts to reach a strength where further handling and processing can take place. Times will depend on surface to be bonded, temperature and humidity.


2 Tested per ASTM D1876-61T

3 Tested per ASTM D1002-64


\* Substrate Failure



### 3M™ Scotch-Weld™ Adhesives

Description	Product Number	Typical Use	Color	Typical Viscosity (cps)	Temp. Range (°F)	Time to Handling (sec.)	Full Cure (hrs.)	Bottle Size	UPC (051111-)	Qty./ Case
<b>Instant Adhesives</b>										
<b>3M™ Scotch-Weld™ Metal Instant Adhesives</b>										
 <ul style="list-style-type: none"> <li>• Optimum performance and high strength bonds on metal to metal</li> <li>• Bond galvanized, anodized, and other difficult-to-bond metals</li> <li>• Two standard viscosities</li> <li>• Markets/Application Ideas: Costume jewelry, treated metals, plated metals and metal working</li> </ul>	MC100	Low viscosity metal bonder	Clear	80–120	-65° to 180°	5–20	24	1 oz.	<b>91663-6</b>	10
								1 lb.	UPC (048011-)	1
									<b>62634-5</b>	


### 3M™ Scotch-Weld™ Anaerobic Adhesives

Description	Product Number	Typical Use	Color	Typical Viscosity (cps)	Temp. Range (°F)	Time to Handling (min.)	Full Cure (hrs.)	Bottle Size	UPC (048011-)	Qty./ Case
<b>Threadlockers</b>										
<b>3M™ Scotch-Weld™ Threadlockers</b>										
<ul style="list-style-type: none"> <li>• Prevent vibration loosening</li> <li>• Seal against leakage and corrosion</li> <li>• Replaces wide variety of traditional and sometimes ineffective vibration proofing methods, reducing cost and increasing performance</li> </ul>										
	TL22	Screwlock—Low removal torque for small fasteners less than a 1/4" (6mm) (Hand tool for removal)	Purple	1,200	-65° to 300°	< 20	24	1mL	<b>31541-1†</b>	100
								10mL	<b>62601-7</b>	10
								250mL	<b>62603-1</b>	2
								50mL	<b>62602-4</b>	10
	TL42	Nutlock—Medium strength, general purpose (Hand tool for removal)	Blue	1,200	-65° to 300°	< 20	24	1mL	<b>62604-8</b>	10
								10mL	<b>62605-5</b>	10
								1L	<b>25124-5†</b>	1
								250mL	<b>62607-9</b>	2
	TL72	High temperature studlock with gap filling for larger diameter coarse threaded parts (Heat and hand tool for removal)	Red	7,000	-65° to 300°	< 20	24	10mL	<b>62606-2</b>	10
								1L	<b>25133-7†</b>	10
								250mL	<b>25136-8†</b>	1
	TL90	Penetrating adhesive for pre-assembled fasteners and porosity sealing of welds (Heat and hand tool for removal)	Green	20	-65° to 300°	< 20	24	250mL	<b>25135-1†</b>	2
50mL								<b>25137-5†</b>	10	
10mL								<b>62615-4</b>	10	
								1L	<b>25150-4†</b>	1
								250mL	<b>62617-8</b>	2
								50mL	<b>62616-1</b>	10


† Order using prefix 051115


Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.

## 3M™ Scotch-Weld™ Anaerobic Adhesives (cont.)

Description	Product Number	Typical Use	Color	Typical Viscosity (cps)	Temp. Range (°F)	Time to Handling (min.)	Full Cure (hrs.)	Bottle Size	UPC (048011-)	Qty./Case	
<b>Retaining Compounds</b>											
<ul style="list-style-type: none"> <li>Used in the assembly of coaxial components such as bearings, gears, shafts bushes, pulleys, cylinder liners and rotors</li> <li>Increase load bearing characteristics of cylindrical joints, reducing assembly stresses, assembly costs and preventing fretting and corrosion</li> </ul>											
	<b>3M™ Scotch-Weld™ General Purpose Retaining Compound RT09</b>										
	RT09	For tight tolerances and press fit augmentation	Green	125	-65° to 300°	10–30	24	10mL	<b>62661-1</b>	10	
								250mL	<b>62663-5</b>	2	
								50mL	<b>62662-8</b>	10	
	<b>3M™ Scotch-Weld™ Slip Fit/Slow Cure Retaining Compound RT35</b>										
	RT35*	High strength for slip fits	Green	2,000	-65° to 300°	10–60	24	10mL	<b>62667-3</b>	10	
								250mL	<b>62669-7</b>	2	
								50mL	<b>62668-0</b>	10	
	<b>3M™ Scotch-Weld™ Pressure Fit/Hi Temperature Retaining Compound RT40</b>								<b>UPC (051115-)</b>		
	RT40*	Secures all types and sizes of bearings, shafts and cylindrical parts	Green	600	-65° to 400°	10–15	24	250mL	<b>25735-3</b>	2	
50mL								<b>25734-6</b>	10		

\*Made to order.

Description	Product Number	Typical Use	Color	Typical Viscosity (cps)	Temp. Range (°F)	Cured Speed Unprimed (Primed)	Cured State	Size	UPC (048011-)	Qty./Case
<b>Gasket Maker Adhesives</b>										
<ul style="list-style-type: none"> <li>Create formed-in-place gaskets on flanges and housings to eliminate need for large inventories of pre-cut gaskets</li> <li>Will not relax or shrink</li> <li>Exceptional pressure and solvent resistance</li> </ul>										
	<b>3M™ Scotch-Weld™ Gasket Maker GM15</b>									
	GM15	General purpose; flexible to withstand vibration	Purple	Paste	-65° to 300°	1–12 hrs. (15 min.–2 hrs.)	Flexible	250mL tube	<b>62656-7</b>	2
								300mL cart.	<b>62657-4</b>	10
								50mL tube	<b>62655-0</b>	
	<b>3M™ Scotch-Weld™ Gasket Maker GM18</b>									
GM18	Instant low pressure seal without a primer on mating aluminum flanges	Red	Paste	-65° to 300°	4–24 hrs. (30 min.–4 hrs.)	Flexible	300gm cart.	<b>62660-4</b>	10	
							50mL tube	<b>62658-1</b>		

Description	Product Number	Typical Use	Size	UPC (048011-)	Qty./Case
<b>Anaerobic Primers</b>					
<b>3M™ Scotch-Weld™ Anaerobic Activators</b>					
	AC649	Acetone-based green primer for inactive or very cold surfaces; 30 day part life for pre-application	2 fl. oz. bottle	<b>62708-3</b>	10
			8 fl. oz. bottle	<b>62709-0</b>	4
			1 gal. can	<b>62707-6</b>	1

Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.



# 3M™ Protective Tapes

## Tape Number Identification Guide

**Film Thickness**  
(nominal thickness in mils)  
Exception: 25A10 - 25 = 2.5 mils

**Film Color**  
B — Blue  
C — Clear  
W — White  
X — Black/White  
No Letter — Clear

**Film Type**  
1 — LDPE  
4 — Polypropylene  
6 — Polyester  
A — Co-Extruded PE  
E — Co-Extruded PE (Carpet Tape Only)  
U — Translucent UV Stable Film  
W — Co-Extruded PE - Black/White

**Adhesive Type**  
**Adhesives:**  
04, 05, 10  
12, 14, 23, 42, 73  
25, 26, 29, 43, 56, 58  
67, 79, 82, 87, 88, 89  
93EZ, 95EZ

**Tack Level:**  
Very Low = VL  
Low = L  
Moderate = M  
High = H  
Very High = VH

**3W26X**


**How to use this selection guide:** The 3M™ Protective Tape Products Selection Guide is a quick reference of standard 3M™ Protective Tape Products to help the user select appropriate tapes for consideration and evaluation in their applications. Products are color-coded by product family for easy reference. It is essential that the user evaluate the 3M™ Protective Tape Product to determine whether it is suitable for a particular purpose to meet the user's expectation.

Many factors can affect the use and performance of a 3M™ Protective Tape Product in a particular application:

- Surface texture of substrate
- Surface preparation of substrate (including use of solvents)
- Method and conditions of tape application
- Time and environmental conditions
- Storage conditions

### Ordering Information

3M™ Protective Tapes are custom ordered products. Please contact your local 3M Authorized Distributor or your 3M Sales Specialist for ordering information. For further assistance, call PolyMask Corporation at 1-800-241-2031.

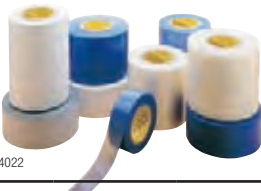Total Tape Thickness		2.0 Mil (0.05mm)								2.5 Mil								
 <p><b>Product Number</b> (Color Coded by Tape Family)</p>		2A04	2A05	2A10	2A12	2A25	2A26	2A29	2A87	2AU23B/UV	2AU26B/UV	25A10	25A12	25A25	25A26	25A29	25A87	
<b>Backing</b>		Co-Ex.	Co-Ex.	Co-Ex.	Co-Ex.	Co-Ex.	Co-Ex.	Co-Ex.	Co-Ex.	Co-Ex.	Co-Ex.	Co-Ex.	Co-Ex.	Co-Ex.	Co-Ex.	Co-Ex.	Co-Ex.	
<b>Tack Level</b>		VL	VL	VL	L	M	M	M	H	L	M	VL	L	M	M	M	H	
<b>Metals Uncoated</b>	<b>Aluminum</b>	Mill Finished																
		Galvanized																
		Anodized Specular																
		Anodized — Flat																
	<b>Stainless Steel</b>	#2B Annealed																
		#4 Mill Polished																
		#8 Mirrored																
<b>Steel</b>	#10 Mirrored																	
<b>Coated — Steel or Aluminum</b>	<b>Embossed</b>	Flat																
		Gloss																
	Matte																	
		Bronze																
		Dissimilar Metals																

### Protective Tape Product Families

#### Polyethylene Tapes

- Better transparency
- Good abrasion resistance
- Cost effective

#### UV Tapes — Clear and Blue

- Outdoor UV resistance for up to 5 months for clear; up to 3 months for blue
- Available in transparent and blue

#### UV Tapes — Co-Extruded Black/White

- Enhanced outdoor UV resistance for up to 6 months

#### Co-Extruded “A” Tapes

The best choice in a 3M™ Protective Tape

- Excellent conformability
- Enhanced abrasion and puncture resistance
- Good heat resistance



(0.06mm)		3.0 Mils (0.08mm)											Black/White 3.0 Mils (0.08mm)				4.0 Mils (0.10mm)				
25A88	25A89	25M26X	3104	3105	3110	3112	3125	3126	3179	3187	31U23C/UV	31U26C/UV	3W25X	3W26X	3W29X	3W55X	4112	4125	4126	4179	4187
PE		PE	PE	PE	PE	PE	PE	PE	PE	PE	PE	PE	Co-Ex.	Co-Ex.	PE	PE	PE	PE	PE	PE	PE
H		M	VL	VL	VL	L	M	M	H	H	L	M	M	M	M	M	L	M	M	H	H
		█					█						█								
			█	█									█								
		█						█					█								
						█	█						█					█	█		
			█	█							█	█					█				
		█								█					█						█
█	█										█	█									█
█					█	█									█	█					█
									█												█

## 3M™ VHB™ Tapes





For over 25 years, engineers have been specifying 3M™ VHB™ Tapes to permanently bond and seal many metals, plastics, and other surfaces for increased productivity, high strength, long term durability and improved appearance.

3M™ VHB™ Tape's all-acrylic construction seals against moisture and most solvents, providing long-term resistance to UV and temperature cycles. The tape's unique foam acts as a shock absorber for outstanding impact resistance. Unlike the stress points common to mechanical fasteners, 3M™ VHB™ Tapes distribute the stress. You can use thinner, light-weight materials with less material fatigue.



Product Number		Color	Temperature Resistance		
			Short	Long	
<b>4941</b>	(45 mils)	Gray	300°F (149°C)	200°F (93°C)	Conformable and plasticizer resistant. Good adhesion to metals, plastics and plasticized vinyls.
<b>4611</b>	(45 mils)	Dark Gray	450°F (232°C)	300°F (149°C)	Bonds to bare metal and holds parts together during the washes and high temperature bake of a powder paint cycle. Used for hat channel and stiffeners.
<b>5952</b>	(45 mils)	Dark Gray	300°F (149°C)	200°F (93°C)	Bonds to most liquid and powder painted surfaces, and ABS blends, without the need to prime the surface first.
<b>4945</b>	(45 mils)	White	300°F (149°C)	200°F (93°C)	Plasticizer resistant. High strength firm core. Bonds to most painted substrates. Good adhesion to substrates containing plasticizers.
<b>4950</b>	(45 mils)	White	300°F (149°C)	200°F (93°C)	Bonds to most metals and high surface energy substrates.


Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.

Product Number	Size	UPC (021200-)	Qty./Case
<b>4941</b>			
	1/2" x 36 yds.	<b>64886-1</b>	18
	3/4" x 36 yds.	<b>64887-8</b>	12
	1" x 36 yds.	<b>64888-5</b>	9
<b>4611</b>			
	1/2" x 36 yds.	<b>56375-1</b>	18
	3/4" x 36 yds.	<b>56002-6</b>	12
	1" x 36 yds.	<b>56146-7</b>	9
<b>5952</b>			
	1/2" x 36 yds.	<b>59967-5</b>	18
	1" x 36 yds.	<b>56229-7</b>	9
<b>4945</b>			
	1/2" x 36 yds.	<b>16961-8</b>	18
	3/4" x 36 yds.	<b>16954-0</b>	12
	1" x 36 yds.	<b>16955-7</b>	9
<b>4950</b>			
	1/2" x 36 yds.	<b>18090-3</b>	18
	3/4" x 36 yds.	<b>18091-0</b>	12
	1" x 36 yds.	<b>18092-7</b>	9

To evaluate how 3M™ VHB™ Tapes can be used in your applications, contact your 3M Sales Specialist or call 1-866-279-1288, ext. 8005.




360843

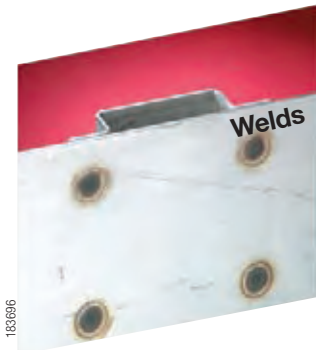

163696



360844



360845



199234



163697

## 3M™ Masking Products



**CLASS I  
MASKING**



**CLASS II  
MASKING**



**CLASS III  
MASKING**

Increasing Holding Power, Line Sharpness,  
and Clean Removal

Tapes with best-in-class holding power for critical paint lines and clean removal on high valued products or processes.

**2693** Up to 325°F (163°C)

**231** Up to 300°F (149°C)

**232** Up to 250°F (121°C)

Tapes with reliable masking and clean removal on surfaces for functional coatings or paints, splicing, and heavy duty maintenance.

**2380** Up to 325°F (163°C)

**2364** Up to 300°F (149°C)

**234** Up to 250°F (121°C)

Tapes with clean removal for light duty bundling, attaching and labeling.




**2307** Up to 200°F (93°C)

**200** Up to 200°F (93°C)

**2214** Up to 150°F (66°C)

Increasing Temperature Performance (30 minute bake)

- What is your application?
- To what temperature will the tape be exposed during use?
- Do you need maximum holding power during use?
- Do you need maximum paint edge sharpness when the tape is removed?
- Do you want to remove the tape without slivering and adhesive residue?

Product Number/Description	Backing/ Adhesive	Total Thickness mils (mm)	Temperature Range °F (°C)	Size	UPC (021200-)	Qty./ Case	
<b>3M™ Masking Products — Class I Masking</b>							
<b>Scotch® Premium High Performance Masking Tape 2693</b>							
 50862	<ul style="list-style-type: none"> <li>• Designed for applications where very aggressive room temperature and high temperature holding is required</li> <li>• Excellent for multi-bake paint cycles</li> </ul>	Tan Mini-Crepe Paper/ Rubber	8.5 (0.21)	Up to 325°F (163°C)*	24mm x 55m	<b>37629-0</b>	36
					36mm x 55m	<b>41121-2</b>	24
					48mm x 55m	<b>37630-6</b>	
					72mm x 55m	<b>42979-8</b>	12
<b>Scotch® Paint Masking Tape 231</b>							
 86989	<ul style="list-style-type: none"> <li>• Excellent for paint masking</li> <li>• Sticks at a touch and stays put</li> <li>• Tough and smooth high performance crepe paper tape</li> <li>• All-purpose masking tape</li> </ul>	Natural Colored Crepe Paper/ Rubber	7.6 (0.19)	Up to 300°F (149°C)*	24mm x 55m	<b>03777-1</b>	36
					36mm x 55m	<b>04111-2</b>	24
					48mm x 55m	<b>04237-9</b>	
					72mm x 55m	<b>04936-1</b>	12
<b>Scotch® High Performance Masking Tape 232</b>							
 13373	<ul style="list-style-type: none"> <li>• Excellent for paint masking</li> <li>• Sticks at a touch and stays put</li> <li>• Tough and smooth high performance crepe paper tape</li> </ul>	Natural Colored Crepe Paper/ Rubber	6.3 (0.16)	Up to 250°F (121°C)*	24mm x 55m	<b>02854-0</b>	36
					36mm x 55m	<b>02855-7</b>	24
					48mm x 55m	<b>04240-9</b>	
					72mm x 55m	<b>02858-8</b>	12

Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.

\* Up to 30 minutes

## 3M™ Masking Products (cont.)


Product Number/Description	Backing/ Adhesive	Total Thickness mils (mm)	Temperature Range °F (°C)	Size	UPC (021200-)	Qty./ Case	
<b>3M™ Masking Products — Class II Masking</b>							
<b>Scotch® Performance Masking Tape 2380</b>							
 50860	<ul style="list-style-type: none"> <li>Designed for industrial paint masking applications</li> <li>Helps assure a good paint line whether air drying or oven baking</li> </ul>	Mini-Crepe Paper/ Natural Synthetic/ Rubber Blend	Up to 325°F (163°C)*	24mm x 55m	<b>44583-5</b>	36	
				36mm x 55m	<b>44582-8</b>	24	
				48mm x 55m	<b>44581-1</b>		
				72mm x 55m	<b>44580-4</b>	12	
<b>Scotch® Performance Masking Tape 2364</b>							
 50859	<ul style="list-style-type: none"> <li>For general masking applications where good holding power and temperature performance is required</li> <li>Designed for many industrial applications</li> <li>Easy tearing and sliver resistance, controlled unwind, clear removal</li> </ul>	Tan Crepe Paper/ Natural Synthetic/ Rubber Blend	Up to 300°F (149°C)*	24mm x 55m	<b>43352-8</b>	36	
				36mm x 55m	<b>43353-5</b>	24	
				48mm x 55m	<b>43354-2</b>		
				72mm x 55m	<b>43355-9</b>	12	
<b>Scotch® General Purpose Masking Tape 234</b>							
 169188	<ul style="list-style-type: none"> <li>Excellent control unwind for paint masking</li> <li>Resists transfer and slivering</li> <li>Conforms well</li> </ul>	Natural Colored Crepe Paper/ Rubber	Up to 250°F (121°C)*	24mm x 55m	<b>02982-0</b>	36	
				36mm x 55m	<b>02983-7</b>	24	
				48mm x 55m	<b>04244-7</b>		
				72mm x 55m	<b>02985-1</b>	12	
<b>3M™ Masking Products — Class III Masking</b>							
<b>3M™ Masking Tape 2307</b>							
 86975	<ul style="list-style-type: none"> <li>General purpose grade</li> <li>Solvent-free construction; non-critical paint masking</li> </ul>	Natural Colored Crepe Paper/ Rubber	5.2 (0.13)	Up to 200°F (93°C)**	12mm x 55m	<b>71116-9</b>	72
					18mm x 55m	<b>71117-6</b>	48
					24mm x 55m	<b>71118-3</b>	36
					36mm x 55m	<b>71119-0</b>	24
					48mm x 55m	<b>71120-6</b>	
					60mm x 55m	<b>55672-2</b>	16
					72mm x 55m	<b>71121-3</b>	12
<b>Product Number/Description</b>							
<b>3M™ Paper Tape 200</b>							
 13372	<ul style="list-style-type: none"> <li>Natural colored, 4.5 mils (0.11mm) crepe paper tape with rubber adhesive</li> <li>Used for holding, bundling, sealing, non-critical masking, and a vast number of other jobs where a pressure sensitive tape is needed</li> </ul>	Natural Colored Crepe Paper/ Rubber	4.4 (0.11)	Up to 200°F (93°C)*	12mm x 55m	<b>53469-5</b>	72
					18mm x 55m	<b>53464-0</b>	48
					24mm x 55m	<b>53465-7</b>	36
					36mm x 55m	<b>53470-1</b>	24
					48mm x 55m	<b>53466-4</b>	
					72mm x 55m	<b>53467-1</b>	12

Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.

\* Up to 30 minutes

\*\* Up to 1 hour

## 3M™ Masking Products (cont.)

Product Number/Description	Backing/ Adhesive	Total Thickness mils (mm)	Temperature Range °F (°C)	Size	UPC (021200-)	Qty./ Case	
<b>3M™ Masking Products — Class III Masking</b>							
<b>3M™ Paper Masking Tape 2214</b>							
 <p>148594</p>	<ul style="list-style-type: none"> <li>Economical, quality, general purpose paper tape with rubber adhesive</li> <li>Use for bundling, sealing, holding and non-critical indoor jobs</li> <li>5.3 mils pressure sensitive tape resists slivering</li> </ul>	Natural Colored Crepe Paper/Rubber	5.2 (0.13)	Up to 150°F (66°C)*	12mm x 55m	<b>45587-2</b>	72
					18mm x 55m	<b>26074-2</b>	48
					24mm x 55m	<b>26075-9</b>	36
					36mm x 55m	<b>26076-6</b>	24
					48mm x 55m	<b>26077-3</b>	
					72mm x 55m	<b>26078-0</b>	12

Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.

\* Up to 30 minutes

Product Number/Description	Size	UPC (051131-)	Qty./Case	
<b>3M™ Masking Products — Painting</b>				
<b>3M™ Scotchblok™ Masking Paper Gold</b>				
 <p>12026</p>	<ul style="list-style-type: none"> <li>Protects against dust contamination from its own paper fibers</li> <li>Holds up well under wet sanding conditions</li> <li>Excellent conformability</li> <li>No solvent penetration</li> <li>Bake cycles up to 225°F (107°C) for 30 minutes</li> <li>Gold</li> </ul>	18" x 750'	<b>06718-9</b>	2
<b>3M™ Masking Paper White</b>				
 <p>12029</p>	<ul style="list-style-type: none"> <li>For utility applications</li> <li>Acceptable conformability</li> <li>24 lbs. treated paper</li> <li>Bake cycles up to 400°F (204°C) for 30 minutes</li> <li>White</li> </ul>	18" x 750'	<b>06539-0</b>	2
<b>3M™ Masking Products — Welding</b>				
<b>3M™ Welding and Spark Deflection Paper</b>				
 <p>43640</p>	<ul style="list-style-type: none"> <li>Flame retardant</li> <li>Repositionable adhesive on one side</li> <li>Formulated to protect vertical surfaces, glass and paint from welding spatter and grinding sparks</li> <li>Easy to use roll form</li> </ul>	24" x 150'	<b>05916-0</b>	2

Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.

## Scotch® High Strength Tapes— Bundling and Reinforcing Solutions

3M has developed a wide range of high strength tapes, resistant to abrasion, moisture and scuffing, for the bundling and reinforcing challenges faced in the industrial marketplace. Applications for these high performance products can vary dramatically — from tabbing the end lap of metal coils to stabilizing pallets to reinforcing large bulk containers or just a single carton.

These tapes balance tensile strength and adhesive holding power, even under extreme conditions, providing secure, cost-effective solutions for a variety of strapping, bundling and reinforcing applications.






### Coil Tabbing

- 880NR
- 898NR
- 8919





### Pipe Bundling

- 880
- 894

Product Number/ Description	Backing Color	Backing	Reinforcement	Adhesive	Elongation at Break	Tensile Strength (lbs./in.)	Size	UPC (021200-)	Qty./ Case
<b>Coil Tabbing</b>									
<b>Scotch® High Performance Filament Tape 880NR</b>									
<ul style="list-style-type: none"> <li>• Excellent balance of high initial adhesion and long-term holding power to fiberboard, metals, printed and painted surfaces including applications exposed to higher temperatures and/or lightly oiled surfaces</li> <li>• Applications include bundling of heavy or sharp objects such as tubing and rods and tabbing the end lap of large metal coils</li> </ul>									
 195276	Clear	Scotchpar™ Film	Polyester yarn	Natural rubber resin	19%	270	18mm x 55m	<b>48445-2</b>	48
							24mm x 55m	<b>48446-9</b>	36
							48mm x 55m	<b>48448-3</b>	24
<b>Scotch® High Performance Filament Tape 898NR</b>									
<ul style="list-style-type: none"> <li>• Formulated to provide balanced performance having both high adhesion and long term holding power</li> </ul>									
 195278	Clear	Scotchpar™ Film	Polyester yarn	Natural rubber resin	3%	380	18mm x 55m	<b>48450-6</b>	48
							24mm x 55m	<b>48451-3</b>	36
							48mm x 55m	<b>48453-7</b>	24
<b>Scotch® Filament Tape 8919</b>									
<ul style="list-style-type: none"> <li>• Ideal for securing hinged appliance doors or parts during shipping and the end lap of steel or aluminum coils</li> <li>• Specially formulated adhesive to provide clean removal and stain resistance on certain substrates</li> </ul>									
 195267	Clear	Scotchpar™ Film	Glass yarn	Natural rubber resin	3%	380	18mm x 55m	<b>39875-9</b>	48
							24mm x 55m	<b>39876-6</b>	36
							48mm x 55m	<b>39878-0</b>	24




Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.

## Scotch® High Strength Tapes— Bundling and Reinforcing Solutions (cont.)

Product Number/ Description	Backing Color	Backing	Reinforcement	Adhesive	Elongation at Break	Tensile Strength (lbs./in.)	Size	UPC (021200-)	Qty./ Case
<b>Pipe Bundling</b>									
<b>Scotch® Filament Tape 880</b>									
<ul style="list-style-type: none"> <li>• High impact and cut resistance</li> <li>• Long term holding power to fiberboard, non-oily metals and printed and painted surfaces</li> </ul>									
 <small>195275</small>	Clear	Scotchpro™ Film	Polyester yarn	Synthetic rubber resin	19%	270	12mm x 55m	<b>39842-1</b>	72
							18mm x 55m	<b>39844-5</b>	48
<b>Scotch® Filament Tape 894</b>									
<ul style="list-style-type: none"> <li>• General purpose packaging tape</li> <li>• When used in bundling, reinforcing or coil tabbing applications with high temperatures and/or oily surfaces, tests should be conducted to determine the tape's suitability</li> </ul>									
 <small>195271</small>	Black	Scotchpro™ Film	Glass yarn	Synthetic rubber resin	4.5%	300	18mm x 55m	<b>88131-2</b>	48

Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.

## Scotch® Filament Tape Dispensers

Product Number/Description	Size	UPC (021200-)	Qty./Case
<b>Scotch® Filament Tape Dispenser H-120</b>			
 <small>63625</small> <ul style="list-style-type: none"> <li>• Portable dispenser with durable metal construction for carton sealing</li> <li>• Accommodates filament tape up to 1" (24mm) for high volume applications with fewer stops</li> <li>• Quickly and easily refillable</li> </ul>	1"	<b>11041-2</b>	48
<b>Scotch® Box Sealing Tape Dispenser H-123</b>			
 <small>63604</small> <ul style="list-style-type: none"> <li>• Lightweight, compact, hand-held dispenser</li> <li>• For pressure sensitive tapes up to 72mm wide x 55m (3" wide x 60 yds.) on 3" cores</li> <li>• Sturdy metal construction for durable, long-life performance</li> </ul>	3"	<b>11102-0</b>	6
<b>Scotch® Box Sealing Tape Dispenser H-128</b>			
 <small>188797</small> <ul style="list-style-type: none"> <li>• Durable, heavy-duty metal dispenser</li> <li>• Provides a quick and easy method of applying H-seal and center-seam closures of RSCs</li> <li>• Lightweight steel construction</li> <li>• Adaptable for a variety of on-the-spot applications</li> <li>• Accommodates tapes up to 2" (48mm) wide on a 3" core</li> </ul>	2"	<b>06909-3</b>	6
<b>Scotch® Definite Length Dispenser M-82</b>			
 <small>100370</small> <ul style="list-style-type: none"> <li>• Heavy-duty dispenser</li> <li>• Handles multiple tape rolls simultaneously from 1/2" (12mm) to a maximum combined width of 4" (98mm)</li> <li>• Applications include definite tape lengths for box closure, holding, appliance and electronics reinforcing, strapping, or bundling, and lift-flap taping on Basillod containers</li> </ul>	4"	<b>18959-3</b>	1



## 3M™ Specialty Tapes

Whether you need an acid-resistant tape for plating masking, a tape that will come off cleanly after high temperature powder coating or a tape with thermal conductivity, you can find it in 3M™ Specialty Tape Solutions.

Product Number/Description	Color	Backing	Adhesive	Elongation at Break	Tensile Strength (lbs./in.)	Size	UPC (021200-)	Qty./Case	
<b>3M™ Polyester Tapes 8901/8902</b>									
<ul style="list-style-type: none"> <li>• Use as a maskant with easy removal for powder coat painting</li> <li>• Polyester film that retains flexibility and thermal resistance and is abrasion, chemical and thermal resistant to help reduce failures due to cracking and backing deterioration</li> <li>• Silicone adhesive for higher heat resistance (up to 400°F; 204°C) than many other adhesives to help reduce failure due to softening, oozing and adhesive transfer</li> </ul>									
 50873	8901	Blue	Polyester	Silicone	115%	28	1" x 72 yds.	<b>85764-5</b>	36
							2" x 72 yds.	<b>85765-2</b>	24
	8902				130%	53	1" x 72 yds.	<b>85766-9</b>	36
							2" x 72 yds.	<b>85767-6</b>	24
<b>3M™ General Purpose Polyester Tape 8951/8952</b>									
<ul style="list-style-type: none"> <li>• Designed to provide clean removal during hi temperature/hi pressure masking operations</li> <li>• Polyester film retains flexibility and thermal resistance to help reduce cracking</li> <li>• Abrasion, chemical and thermal resistance helps reduce backing deterioration</li> <li>• Hi heat resistant (up to 425°F; 218°C) silicone adhesive helps reduce failure due to softening, oozing and adhesive transfer</li> </ul>									
 85697	8951	Blue	Polyester	Silicone	100%	30	1" x 72 yds.	<b>48225-0</b>	36
							2" x 72 yds.	<b>48227-4</b>	24
	8952				110%	55	1" x 72 yds.	<b>48230-4</b>	36
							2" x 72 yds.	<b>48232-8</b>	24
<b>3M™ Polyester Tape 8992</b>									
<ul style="list-style-type: none"> <li>• Silicone adhesive has high temperature properties to perform powder-coat masking, flash breaker and bag seeding applications</li> <li>• Polyester film is solvent, heat, abrasion and shrink resistant</li> <li>• Green color makes tape placement obvious for both application and removal</li> <li>• Thin backing leaves a sharp paint line</li> </ul>									
 462002	8992	Dark Green	Polyester	Silicone	83%	48	1" x 72 yds.	<b>25736-0*</b>	9
							2" x 72 yds.	<b>25759-9*</b>	6
<b>3M™ Glass Cloth Tape 361</b>									
<ul style="list-style-type: none"> <li>• For extreme temperatures</li> <li>• 5.4 mil backing thickness</li> <li>• Can withstand intermittent temperatures up to 550°F (288°C) or higher, depending upon the type and duration of the heat source</li> </ul>									
 50863	361	White	Glass Cloth	Silicone	10%	182	1" x 60 yds.	<b>03017-8</b>	36
							2" x 60 yds.	<b>04275-1</b>	24
<b>3M™ Electroplating Tape 470</b>									
<ul style="list-style-type: none"> <li>• Excellent resistance to most chemicals used in typical electroplating operations</li> <li>• Resists most common solvents—care should be taken to avoid ketones, chlorinated hydrocarbons and esters found in lacquer thinners, degreasers, paint strippers, etc. which may cause the backing to swell or curl</li> <li>• Conformable</li> <li>• Can be qualified to meet Federal Specification HH-T-0025 (GSA-FSS)</li> </ul>									
 51586	470	Tan	Pigmented Vinyl Plastic	Rubber	180%	20	1" x 36 yds.	<b>85616-7</b>	36
							2" x 36 yds.	<b>85617-4</b>	24
<b>3M™ Aluminum Foil Tape 425</b>									
<ul style="list-style-type: none"> <li>• Good candidate as a maskant in electroplating of aluminum because it will not contaminate the bath</li> <li>• Adhesion to steel: 47 oz./in. width</li> <li>• An acrylic adhesive, combined with a durable aluminum backing, offers ideal properties for long serviceable life indoors and out</li> <li>• Aluminum backing provides excellent reflection of both heat and light</li> </ul>									
 495552	425	Shiny Silver	Dead Soft Aluminum	Acrylic	8%	30	1" x 60 yds.	<b>60572-7</b>	36
							2" x 60 yds.	<b>60574-1</b>	24
<b>3M™ Lead Foil Tape 420/421</b>									
<ul style="list-style-type: none"> <li>• Can be die-cut into specific shapes</li> <li>• Very good conformability</li> <li>• Adhesion to steel: 45 oz./in. width</li> <li>• Good thermal properties and will perform over a wide variety of temperature conditions (-60° to 225°F; -54° to 106°C); use indoors or out</li> <li>• Electrically and thermally conductive</li> </ul>									
 145295	420	Dark Silver	Lead Foil	Rubber (Green)	12%	20	1" x 36 yds.	<b>04923-1</b>	9
							2" x 36 yds.	<b>03081-9</b>	6
	421				14%	15	1" x 36 yds.	<b>04917-0</b>	9
							2" x 36 yds.	<b>03195-3</b>	6




\*Order using prefix 051115.

## Scotch® Box Sealing Tapes

With Scotch Box Sealing Tapes, you have the flexibility to seal boxes in a wide range of environments for durable and secure closure in packing stations. The tape is tough enough to resist score-line breaking and center-seam splitting, even when subject to rough handling.



**Features:** Strong backing with either pressure-sensitive hot melt synthetic rubber resin adhesive or acrylic adhesives for reliable closures. A variety of hand-held dispensers allow for quick and easy application.



Product Number/Description	Backing/ Adhesive	Total Thickness mils (mm)	Color	Size	UPC (021200-)	Qty./ Case
<b>Scotch® Box Sealing Tape 355</b>						
 <p>226785</p> <ul style="list-style-type: none"> <li>• Used for demanding packaging applications</li> <li>• Considered water resistant as per ASTM D5570</li> <li>• Adheres instantly to most surfaces, including cartons containing high levels of recycled content</li> <li>• High edge tear and split resistance</li> <li>• Superior performance ensures reliable closures</li> </ul>	Polyester Film/ Hot Melt Rubber-Resin	3.43 (.09)	Clear	48mm x 50mm	<b>72330-8</b>	36
				48mm x 914mm	<b>72300-1</b>	4
				72mm x 50mm	<b>72331-5</b>	24
				72mm x 914mm	<b>72333-9</b>	2
			Tan	48mm x 50mm	<b>06651-9*</b>	36
				72mm x 50mm	<b>72327-8</b>	24
<b>Scotch® Box Sealing Tape 375</b>						
 <p>48050</p> <ul style="list-style-type: none"> <li>• Excellent performance box sealing tape</li> <li>• Seals heavy, high-value, over-packed, or under-packed packages</li> <li>• Strong for demanding situations</li> <li>• Meets US postal regulations</li> </ul>	Polypropylene/ Synthetic Rubber	3.1 (.079)	Clear	48mm x 50m	<b>72406-0</b>	36
				48mm x 914mm	<b>72408-4</b>	6
				72mm x 50m	<b>72407-7</b>	24
				72mm x 914mm	<b>72409-1</b>	4
			Tan	48mm x 50m	<b>72401-5</b>	36
				72mm x 50m	<b>72402-2</b>	24
<b>Scotch® Box Sealing Tape 373</b>						
 <p>226794</p> <ul style="list-style-type: none"> <li>• High performance packaging tape</li> <li>• Used for box sealing, splicing, recouperage and other demanding packaging applications</li> <li>• Heavy duty, conformable backing</li> <li>• Consistent pressure sensitive hot melt adhesive system</li> <li>• Time proven construction assures high performance in a wide range of environments and applications</li> </ul>	Polypropylene/ Synthetic Rubber	2.5 (.064)	Clear	48mm x 50m	<b>72368-1</b>	36
				48mm x 914mm	<b>72377-3</b>	6
				48mm x 1500mm	<b>72379-7</b>	3
				72mm x 50m	<b>69605-3</b>	24
				48mm x 100m	<b>73079-5</b>	36
				72mm x 100m	<b>73080-1</b>	24
			Tan	72mm x 914mm	<b>72378-0</b>	4
				48mm x 50m	<b>72359-9</b>	36
				72mm x 50m	<b>72361-2</b>	24
				48mm x 100m	<b>73081-8</b>	36
				72mm x 100m	<b>73082-5</b>	24
				72mm x 100m	<b>73082-5</b>	24
<b>Scotch® Box Sealing Tape 371</b>						
 <p>48050</p> <ul style="list-style-type: none"> <li>• Seals single wall corrugated cartons or bundles a group reliably</li> <li>• Polypropylene backing for tear resistance</li> <li>• Pressure-sensitive rubber adhesive offers quick, moisture proof seal</li> <li>• A good, tight, general purpose seal</li> </ul>	Polypropylene/ Synthetic Rubber	1.9 (.048)	Clear	48mm x 50m	<b>13679-5</b>	36
				72mm x 50m	<b>19279-1</b>	24
				48mm x 100m	<b>15873-5</b>	36
				48mm x 914mm	<b>13681-8</b>	6
				48mm x 1500mm	<b>61823-9</b>	6
				72mm x 100m	<b>19280-7</b>	24
				72mm x 914mm	<b>18198-6</b>	4
				72mm x 1500mm	<b>62455-1</b>	4
			Tan	48mm x 50m	<b>14105-8</b>	36
				72mm x 50m	<b>18197-9</b>	24
				48mm x 100m	<b>15872-8</b>	36
				48mm x 914mm	<b>14107-2</b>	6
				72mm x 100m	<b>61525-2</b>	24
				72mm x 100m	<b>61525-2</b>	24





\*Order using prefix 051131.

## Scotch® Box Sealing Tapes (cont.)




Product Number/Description	Backing/ Adhesive	Total Thickness mils (mm)	Color	Size	UPC (021200-)	Qty./ Case
<b>Scotch® Box Sealing Tape 311</b>						
 <p>195156</p> <ul style="list-style-type: none"> <li>• General purpose box sealing tape designed specifically for utility type applications on light to medium weight boxes</li> <li>• Adheres instantly to a variety of surfaces, even in colder and damper environments</li> <li>• Conformable backing</li> <li>• Edge tear and split resistant</li> <li>• Good aging in sunlight or fluorescent lighting</li> </ul>	Polypropylene/ Pressure Sensitive Acrylic	2.05 (.052)	Clear	48mm x 100mm	<b>88292-0</b>	36
				48mm x 1500mm	<b>69398-4</b>	6
				72mm x 100mm	<b>69397-7</b>	24
<b>Tartan™ General Purpose Box Sealing Tape 305</b>						
 <p>195155</p> <ul style="list-style-type: none"> <li>• General purpose packaging tape used for non-critical box sealing applications</li> <li>• A conformable backing</li> <li>• Good closure for lightweight boxes exposed to minimal distribution hazards</li> </ul>	Polypropylene/ Pressure Sensitive Acrylic	1.8 (.046)	Clear	48mm x 100mm	<b>39809-4</b>	36
				48mm x 914mm	<b>39810-0</b>	6
<b>Scotch® Cold Temperature Box Sealing Tape 3331</b>						
<ul style="list-style-type: none"> <li>• Ideal for applications at refrigeration temperatures or at room temperature with subsequent storage at low temperatures</li> <li>• Adheres to a wide variety of surfaces between 30°–40°F (-1°–4°C), secured closures maintained below 32°F (0°C)</li> <li>• Excellent tack at low temperatures</li> </ul>	Polypropylene/ Pressure Sensitive Hot Melt Rubber Resin	1.8 (0.045)	Clear	48mm x 100mm	<b>32173-3</b>	36
				48mm x 914mm	<b>32174-0</b>	6
				72mm x 100mm	<b>32175-7</b>	24
				72mm x 914mm	<b>32176-4</b>	4

## 3M™ Box Sealing Tape Dispensers




Scotch® and Tartan™ brand hand-held dispensers are designed for use with specially formulated 3M box sealing tapes for improved ease of use.

Product Number/Description	Size	UPC (021200-)	Qty./Case
<b>Scotch® Box Sealing Tape Dispenser H122</b>			
 <p>196837</p> <ul style="list-style-type: none"> <li>• Hand braking system lets you control the amount of tape you use</li> <li>• Popular, light, plastic, contoured hand held dispenser</li> <li>• Small and portable, yet allows you to dispense tape up to 2" wide on a 3" core</li> </ul>	48mm (2")	<b>06925-3</b>	6
<b>Scotch® Low Noise Tape Dispenser H150</b>			
 <p>196835</p> <ul style="list-style-type: none"> <li>• Hand-held, roll-on, pistol-grip dispenser</li> <li>• Designed to reduce the noise of tape unwind during application</li> <li>• Sturdy, durable, and easy to load and operate</li> <li>• Metal and high-impact plastic construction</li> <li>• Includes "mousetrap" tape brake</li> </ul>	48mm (2")	<b>39518-5</b>	6
<b>Scotch® Low Noise Tape Dispenser H153</b>			
 <p>195182</p> <ul style="list-style-type: none"> <li>• Same features as the H150 dispenser</li> <li>• Metal and high-impact plastic construction</li> <li>• Includes "mousetrap" tape brake</li> </ul>	72mm (3")	<b>39820-9</b>	6
<b>Scotch® Box Sealing Tape Dispenser H180</b>			
 <p>195186</p> <ul style="list-style-type: none"> <li>• Hand held, portable and easy to use roll-on motion</li> <li>• Features an adjustable tape brake allowing control of tension and delivery</li> <li>• Dispenses tapes 2" wide and is constructed of plastic and metal</li> </ul>	48mm (2")	<b>19008-7</b>	6

## 3M™ Box Sealing Tape Dispensers (cont.)

Product Number/Description	Size	UPC (021200-)	Qty./Case
<b>Scotch® Box Sealing Tape Dispenser H183</b>			
 <p>195177</p> <ul style="list-style-type: none"> <li>Recommended for center seam sealing of RSC boxes</li> <li>Metal and high-impact plastic construction for durability and long-life performance</li> <li>Hand-held dispenser features adjustable tape break</li> </ul>	72mm (3")	<b>61850-5</b>	5
<b>Scotch® Box Sealing Tape Dispenser H192</b>			
 <p>196838</p> <ul style="list-style-type: none"> <li>Tape tension can be controlled with tape roll break</li> <li>High impact plastic construction</li> </ul>	48mm (2")	<b>86512-1</b>	6
<b>Tartan™ Box Sealing Hand Dispenser HB933</b>			
 <p>196847</p> <ul style="list-style-type: none"> <li>Seals cartons easily and secures a smooth, one-handed roll-on motion</li> <li>Unique spring-loaded bar maintains constant tension during tape application</li> <li>For tape rolls up to 3" wide on a 3" core</li> </ul>	72mm (3")	<b>22922-0</b>	6

## 3M™ Duct Tapes

Product Number/Description	Backing/Adhesive	Total Thickness mils (mm)	Temperature Range °F (°C)	Color	Size	UPC (021200-)*	Qty./Case
<b>Class I — Clean Removal Duct Tape</b>							
<b>3M™ Performance Plus Duct Tape 8979</b>							
 <p>352555</p> <ul style="list-style-type: none"> <li>Removes cleanly from most opaque surfaces, leaving behind no sticky residue for up to six months</li> <li>Indoors or outdoors, this tape stays on the job without deteriorating for up to twelve months</li> <li>Water resistant and sunlight/UV resistant</li> </ul>	Polyethylene film over cloth scrim/ Natural and Synthetic Rubber	12.6 (0.33)	Up to 200°F (93°C)	Slate Blue	24mm x 54.8m	<b>048011-53922-5</b>	48
					48mm x 54.8m	<b>56468-0</b>	24
					72mm x 54.8m	<b>56469-7</b>	12
					96mm x 54.8m	<b>56470-3</b>	
<b>Class II — Heavy Duty Duct Tape</b>							
<b>3M™ Multi-Purpose Duct Tape 3900</b>							
 <p>150221</p> <ul style="list-style-type: none"> <li>Polyethylene coated cloth with rubber adhesive</li> <li>General purpose duct tape</li> <li>Good choice for general maintenance, wrapping, sealing and protecting</li> </ul>	Polycoated Cloth/ Rubber	7.7 (.020)	Up to 200°F (93°C)	Silver	48mm x 54.8m	<b>051131-06976-3</b>	24
				Black		<b>49833-6</b>	
				Yellow		<b>49828-2</b>	
<b>Class III — Utility Duct Tape</b>							
<b>3M™ Vinyl Duct Tape 3903</b>							
 <p>69452</p> <ul style="list-style-type: none"> <li>Embossed vinyl film coated with rubber adhesive</li> <li>Designed for general sealing, color coding, masking, wrapping and bundling, protecting and other light duty applications where easy unwind, easy tear and less adhesive transfer are important</li> </ul>	Embossed Vinyl/ Rubber	6.3 (0.16)	Up to 250°F (121°C)	Gray	2" x 50 yds.	UPC (051131-)*	24
				Black		<b>06984-8</b>	
				Yellow		<b>06995-4</b>	
						<b>06982-4</b>	

\*Use this prefix unless otherwise noted.











Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.



## 3M™ Particulate Respirators

**IMPORTANT:** Before use of these respiratory protection products, a written respiratory protection program must be implemented, meeting all the requirements of OSHA 29 CFR 1910.134 such as training, fit testing, medical evaluation and applicable OSHA substance specific standards.

**PLEASE NOTE:** All products contain Advanced Electret Media, noseclip and two straps.

Particulate Respirator	3M™ Particulate Respirator	Suggested Application	Nose Foam	3M™ Cool Flow™ Valve	Braided Comfort Strap	Carbon Media	Nose-clip	Welding Web	Adj. Straps	Individual Additional Features	UPC (051131-)	Qty./Case	
<b>Dusty Conditions</b>													
	8200, N95	Grinding, Sanding, Sweeping, Other dusty operations	●				S			Patented Filter Media	91913-1	160	
	8210, N95	Grinding, Bagging, Sanding, Sweeping, Other dusty operations	●				S				UPC (051138-)	46457-3	160
	8210 Plus, N95		●		●		S				52924-8		
	8271, P95	Grinding, Machining, Sanding, Sweeping, Other dusty/hot/oily operations		●	●		M			Patented Filter Media, Faceseal	54285-1	80	
	8511, N95	Grinding, Bagging, Sanding, Sweeping, Other hot/dusty operations		●	●		M			Patented Filter Media, Soft Inner Materials	54343-8	240	
	9210, N95		●				S			Patented Filter Media, Individual Packaging, Collapse Resistant	UPC (051131-)		37021-5
	9211, N95		●	●			S				37022-2		120
<b>Welding and Metal Pouring</b>													
	8212, N95	Welding, Torch cutting, Brazing, Soldering, Metal pouring		●	●		S	●	●	Patented Filter Media, Faceseal, Cake Resistant Media	UPC (051138-)	54141-0	80
	8214, N95	Welding, Torch cutting, Brazing, Soldering, Metal pouring, Stainless, Galvanized		●	●	OV* OZ**	S	●	●		66192-7		
	8515, N95	Welding, Torch cutting, Brazing, Soldering		●	●		M	●		Patented Filter Media	UPC (051131-)	07189-1	






\* OV: 3M recommended for relief against nuisance levels of organic vapors. Nuisance level refers to concentrations not exceeding the OSHA PEL or applicable government exposure limits, whichever is lower.

\*\* OZ: 3M recommended for ozone protection up to 10 times the OSHA PEL or applicable government occupational exposure limits, whichever is lower. Not NIOSH approved for use against ozone.

S = Standard noseclip M = M-noseclip

**See Warning on Page 110**

### 3M™ Particulate Respirators (cont.)

Particulate Respirator	3M™ Particulate Respirator	Suggested Application	Nose Foam	3M™ Cool Flow™ Valve	Braided Comfort Strap	Carbon Media	Nose-clip	Welding Web	Adj. Straps	Individual Additional Features	UPC (051138-)	Qty./Case
<b>Nuisance Level Odor</b>												
 8246, R95	8246, R95	Aluminum, Smelting, Paper processing, Brewing operations, Glass etching, Chemical processing	●	●		AG†	S				54357-5	120
 8247, R95	8247, R95	Foundry operations, Undercoating, Lab settings, Agriculture, Petrochemical processing	●	●		OV*	S				54358-2	
 8516, N95	8516, N95	Aluminum, Smelting, Paper processing, Brewing operations, Glass etching, Chemical processing		●	●	AG†	M			Softer Inner Materials	66392-1	80
 8576, P95	8576, P95				●	●	AG†	M			54370-4	
 8577, P95	8577, P95	Foundry operations, Undercoating, Lab settings, Agriculture, Petrochemical processing		●	●	OV*	M				54371-1	










\* OV: 3M recommended for relief against nuisance levels of organic vapors.

† AG: 3M recommended for relief against nuisance level acid gas vapors.

Nuisance level refers to concentrations not exceeding the OSHA PEL or applicable government exposure limits, whichever is lower.

S = Standard noseclip    M = M-noseclip

### Technologies

	<b>Cool Flow™ Exhalation Valve.</b> Patented one-way valve for easy exhalation and cool, dry comfort.		<b>Advanced Electret Media.</b> Electrostatically charged microfibers help make breathing easier and cooler.		<b>Adjustable Buckle Straps.</b> A single tug helps provide a comfortable, secure fit.
	<b>M-noseclip.</b> Adjusts easily for fewer pressure points and greater comfort.		<b>Carbon Filter Material.</b> Carbon layers remove many nuisance level odors* for greater wearer comfort.		<b>P-series Filter.</b> Featuring Advanced Electret Media, appropriate for prolonged use in oil and non-oil containing environments.
	<b>Faceseal.</b> Soft and secure, conforms closely to face for long-lasting comfort.		<b>Cake-resistant Filter Media.</b> Specially designed filter layers for welding provide longer respirator life and easier breathing.		<b>Compatibility.</b> Accommodates a wide range of safety equipment, including eye and hearing protection.

\* Nuisance level odors refers to concentrations not exceeding the OSHA PEL or other applicable government exposure limits, whichever is lower.

**See Warning on Page 110**

# 3M™ Full and Half Facepiece Elastomeric Respirators

Respirator and filters provide an easy-to-use, comfortable, wide range of respiratory protection.

**Applications:** Use in a variety of applications including painting, welding, metalworking and auto manufacturing (when used with appropriate cartridges, filters or supplied air).


## 1. Choose Facepiece

### Half Facepiece

#### 5000 Series

**Features and Benefits**


- Single use respirator: cartridges are permanently attached
- Made from soft, lightweight thermoplastic elastomer
- No ongoing maintenance necessary
- Resealable storage bag helps keep respirator clean between uses
- Low profile design provides wider field of vision and greater comfort while wearing goggles or glasses
- For convenience and simplicity, some respirator assemblies come with 3M™ Filters P95 along with 3M™ Filter Retainers 501



#### 6000 Series

**Features and Benefits**

- Made from soft, lightweight thermoplastic elastomer
- Easy to adjust head straps
- Supplied with reclosable storage bag
- Swept back design improves balance and visibility
- NIOSH approved for negative pressure air purifying and positive pressure dual airline applications
- Can be used with 3M™ Filters and Cartridges or 3M™ Dual Airline System



#### 7500 Series

**Features and Benefits**

- Made from soft, resilient silicone and heat resistant plastics
- Unique head harness design gives to the user the option of wearing the respirator in traditional or drop-down mode
- 3M™ Cool Flow™ Exhalation Valve makes breathing easier, and helps reduce heat and moisture buildup in the facepiece and provides cool, dry comfort



### Full Facepiece

#### 6000 Series

**Features and Benefits**

- Soft, silicone faceseal
- Four strap suspension for easy donning and doffing
- Bayonet attachment
- Swept back cartridge design
- Wide field of vision
- Meets all the requirements of ANSI Z87.1-2003 for high impact (Z87+)
- Integrated optical correction limits distortion as you look from the left to the right
- Directs exhaled breath and moisture downward
- Smooth surface allows for quick and easy cleaning
- Available with negative pressure and dual airline models



#### 7800S Series

**Features and Benefits**

- Double-flange faceseal and six adjustable straps help provide a secure fit
- Made of silicone for increased comfort and durability
- Extra-large inhalation and exhalation valves help make breathing easier
- Use with 3M™ Filters and Cartridges and/or a variety of powered and supplied air systems




















Product	Model	Size	UPC (051138-)	Qty./Case
<b>3M™ Half Facepiece Respirator</b>				
5000 Series	51P71	S	66068-5	12
	52P71	M	66069-2	
	53P71	L	66070-8	
Product	Model	Size	UPC (051131-)	Qty./Case
6000 Series	6100	S	07024-5	24
	6200	M	07025-2	
	6300	L	07026-9	
7500 Series	7501	S	37081-9	10
	7502	M	37082-6	
	7503	L	37083-3	

Product	Model	Size	UPC (051131-)	Qty./Case
<b>3M™ Full Facepiece Respirator</b>				
6000 Series	6700	S	54145-8	4
	6800	M	54146-5	
	6900	L	54159-5	
Product	Model	Size	UPC (051138-)	Qty./Case
7800S Series	7800S-S	S	54257-3	1
	7800S-M	M	54258-0	
	7800S-L	L	54259-7	

Note: When used in supplier air mode, employer must provide a minimum of Grade D breathing air in accordance with OSHA requirements.

**See Warning on Page 110**

**2. Choose Filter/Cartridge Combination**

Filter/Cartridge	NIOSH Approval**	UPC (051131-)	Qty./ Case	Respirators	Filter Retainer/ Adapter	UPC (051138-)	Qty./ Case			
<b>Particles</b>										
	<ul style="list-style-type: none"> <li>P100 Particulate Filter</li> <li>NIOSH approved for environments containing certain oil and non-oil based particles</li> </ul>	<b>07000-9</b>	50 pairs	5000 Series 6000 Series 7000 Series		<b>21511-3</b>	100			
	<ul style="list-style-type: none"> <li>P100 Filter with nuisance level organic vapor relief††</li> <li>NIOSH approved for environments containing certain oil and non-oil based particles</li> </ul>	<b>07184-6</b>		6000 Series 7000 Series						
	<ul style="list-style-type: none"> <li>Hydrogen Fluoride, P100 filter with nuisance level organic vapor and acid gas relief†††</li> <li>Very low breathing resistance for improved comfort</li> <li>Unique, lightweight and compact hard case design</li> </ul>	<b>37173-1</b>	60	6000 Series 7000 Series						
	<ul style="list-style-type: none"> <li>P100 Particulate Filter</li> </ul>	<b>52705-3</b>		5000 Series 6000 Series 7000 Series						
	<ul style="list-style-type: none"> <li>Replacement Particulate P95 Filter 5P71</li> </ul>	<b>051138-66278-8</b>	72	5000 Series 6000 Series 7000 Series					<b>17668-1</b>	
	<ul style="list-style-type: none"> <li>Particulate Filter 5N11, N95</li> </ul>	<b>46464-1</b>	100	5000 Series 6000 Series					<b>54376-6</b>	16
<b>Gases and Vapors</b>										
	<ul style="list-style-type: none"> <li>Certain organic vapors (a) (b)</li> </ul>	<b>21674-5</b>	30 pairs	6000 Series 7000 Series		<b>21511-3</b>	100			
	<ul style="list-style-type: none"> <li>Certain organic vapors, chlorine, hydrogen chloride and sulfur dioxide or hydrogen sulfide or hydrogen fluoride (a) (b)</li> </ul>	<b>07047-4</b>								
	<ul style="list-style-type: none"> <li>Certain organic vapors, chlorine, hydrogen chloride, chlorine dioxide, sulfur dioxide, hydrogen sulfide, ammonia/methylamine, formaldehyde or hydrogen fluoride (a) (b) (c)</li> </ul>	<b>54186-1</b>								
<b>Particles and Vapors</b>										
	<ul style="list-style-type: none"> <li>P100/Certain organic vapors (a) (b)</li> </ul>	<b>46465-8</b>	30 pairs	6000 Series 7000 Series		<b>21511-3</b>	100			
	<ul style="list-style-type: none"> <li>P100/Certain organic vapors, chlorine, hydrogen chloride and sulfur dioxide or hydrogen sulfide or hydrogen fluoride (a) (b)</li> </ul>	<b>46467-2</b>								
	<ul style="list-style-type: none"> <li>P100/Certain organic vapors, chlorine, hydrogen chloride, chlorine dioxide, sulfur dioxide, hydrogen sulfide, ammonia/methylamine, formaldehyde or hydrogen fluoride (a) (b) (c)</li> </ul>	<b>54187-8</b>								

† Do not reuse.

\* 3M recommended for relief against nuisance levels of organic vapors. Nuisance level organic vapor refers to concentrations not exceeding the OSHA PEL or applicable government occupational exposure limits, whichever is lower.

\*\* For respiratory protection against the following contaminants up to 10X PEL with half facepiece respirators:

(a) All respirators and respirator assemblies can be used up to the NIOSH approval limits, 10X PEL for half facepiece respirators, or 50X PEL for full facepiece respirators when quantitatively fit tested, or the maximum use concentration allowable in applicable OSHA standards, whichever is lower.

(b) For specific usage, limitations and warning information, see packaging, *User Instructions*, or call 3M OH&ESD Technical Service at 1-800-243-4630.

















(c) OSHA regulations require that gas-proof goggles be worn with half facepiece respirators when used against formaldehyde.

\*\*\* 3M recommended for relief against nuisance levels of organic vapor and acid gases. Nuisance level organic vapor and acid gas refers to concentrations not exceeding OSHA PEL or applicable government occupational exposure limits, whichever is lower. Not NIOSH-approved for organic vapors or acid gases. Do not use for respiratory protection against organic vapors or acid gases (except hydrogen fluoride).

**See Warning on Page 110**



## 3M™ Speedglas™ Auto-Darkening Filters and Helmets

3M™ Speedglas™ Helmets and Auto-Darkening Filters							
	100 Series		9000 Series	Super Light	9100 Series		
	 	 	317588 	466874 	516868 	517340 	516865 
	<b>Filter 100V and Helmet</b>	<b>Single Shade Filter and Helmet</b>	<b>9002D Filter and Helmet</b>	<b>SL (Super Light) Filter and Helmet</b>	<b>9100V Filter and Helmet</b>	<b>9100X Filter and Helmet</b>	<b>9100XX Filter and Helmet</b>
			408870 	412972 	516867 	516857 	517342 
	<b>100V Filter</b>	<b>100S-10 or 100S-11 Filter</b>	<b>9002D Filter</b>	<b>SL Filter</b>	<b>9100V Filter</b>	<b>9100X Filter</b>	<b>9100XX Filter</b>
	<ul style="list-style-type: none"> <li>• Incorporates shades 3 and 8–12</li> <li>• MIG, Stick, most TIG</li> <li>• Three sensitivity settings</li> <li>• Reliable arc detection</li> <li>• Excellent optical quality</li> <li>• Viewing area: 6.05 in<sup>2</sup></li> </ul>	<ul style="list-style-type: none"> <li>• Shades 3 and 10 or 11</li> <li>• MIG, Stick, most TIG</li> <li>• Outstanding optical clarity</li> <li>• Viewing area: 6.05 in<sup>2</sup></li> </ul>	<ul style="list-style-type: none"> <li>• Variable shade 10 and 11</li> <li>• MIG, Stick, most TIG</li> <li>• Two sensitivity settings</li> <li>• Membrane-covered control buttons</li> <li>• Replaceable batteries</li> </ul>	<ul style="list-style-type: none"> <li>• Lightest weight Speedglas helmet available—just 13 oz. (370g)</li> <li>• Variable shade 8–12</li> <li>• MIG, Stick, and TIG</li> <li>• Four sensitivity settings</li> <li>• Patented auto on/off technology</li> <li>• Replaceable batteries</li> </ul>	<ul style="list-style-type: none"> <li>• Incorporates shades 5 and 8–13</li> <li>• Stick, MIG, TIG, grinding and torch cutting modes</li> <li>• Advanced arc detection electronics for use with all arc welding processes</li> <li>• Viewing area: 6.05 in<sup>2</sup></li> </ul>	<ul style="list-style-type: none"> <li>• Incorporates shades 5 and 8–13</li> <li>• Stick, MIG, TIG, grinding and torch cutting modes</li> <li>• Advanced arc detection electronics for use with all arc welding processes</li> <li>• Viewing area: 9.12 in<sup>2</sup></li> </ul>	<ul style="list-style-type: none"> <li>• Incorporates shades 5 and 8–13</li> <li>• Stick, MIG, TIG, grinding and torch cutting modes</li> <li>• Advanced arc detection electronics for use with all arc welding processes</li> <li>• Viewing area: 12.11 in<sup>2</sup></li> </ul>
	<b>Black</b>	<b>SS Black</b>	<b>9002D</b>	<b>Super Light</b>	<b>9100V</b>	<b>9100X</b>	<b>9100XX</b>
<b>Standard Helmet</b>	07-0012-31BL	07-0012-10BL 07-0012-11BL	04-0012-15	05-0013-41	06-0100-100	06-0100-20	06-0100-30
<b>Standard Helmet with SideWindows</b>	N/A	N/A	040012-15SW	N/A	06-0100-10SW	06-0100-20SW	06-0100-30SW
<b>ProTop System</b>	N/A	N/A	04-0015-15	N/A	N/A	N/A	N/A
<b>ProTop System with SideWindows</b>	N/A	N/A	04-0015-15SW	N/A	N/A	N/A	N/A
<b>FlexView System</b>	N/A	N/A	04-0016-15	N/A	N/A	N/A	N/A
<b>FlexView System with SideWindows</b>	N/A	N/A	04-0016-15SW	N/A	N/A	N/A	N/A
<b>FlexView System with ProTop</b>	N/A	N/A	04-1516-15	N/A	N/A	N/A	N/A
<b>FlexView System with ProTop and SideWindows</b>	N/A	N/A	04-1516-15SW	N/A	N/A	N/A	N/A

See Warning on Page 110




## 3M™ Speedglas™ Graphic Helmets Series 100

Product Number/Description	Shade	UPC (051131-)	Qty./Case
<ul style="list-style-type: none"> <li>• Five variable dark shade levels (ADF shades 8–12)</li> <li>• Three user-selectable sensitivity levels for reliable arc detection</li> <li>• For stick, MIG and most TIG welding processes</li> <li>• Excellent optical quality</li> <li>• Shade 3 in the light state</li> <li>• Auto-Darkening Filter 100V</li> </ul>			
      			
<b>Blazed</b>			
<b>Aces High</b>			
<b>American Pride</b>			
<b>Chrome</b>			
<b>Mechanical Skull</b>			
<b>Trojan Warrior</b>			
<b>Tribal</b>			
3M™ Speedglas™ Blazed Welding Helmet 100 with Auto-Darkening Filter 100V 07-0012-31BZ	Variable Shade 8–12	<b>37233-7</b>	1
3M™ Speedglas™ Aces High Welding Helmet 100 with Auto-Darkening Filter 100V 07-0012-31AH		<b>37237-5</b>	
3M™ Speedglas™ American Pride Welding Helmet 100 with Auto-Darkening Filter 100V 07-0012-31AP		<b>37238-2</b>	
3M™ Speedglas™ Chrome Welding Helmet 100 with Auto-Darkening Filter 100V 07-0012-31CH		<b>37235-1</b>	
3M™ Speedglas™ Mechanical Skull Welding Helmet 100 with Auto-Darkening Filter 100V 07-0012-31MS		<b>37236-8</b>	
3M™ Speedglas™ Trojan Warrior Welding Helmet 100 with Auto-Darkening Filter 100V 07-0012-31TW		<b>37239-9</b>	
3M™ Speedglas™ Tribal Welding Helmet 100 with Auto-Darkening Filter 100V 07-0012-31TR		<b>37234-4</b>	



## 3M™ Noise Indicator NI-100








Product Number/Description	Model	UPC (051131-)	Qty./Case
 <ul style="list-style-type: none"> <li>• LED light clearly indicates when noise levels exceed a potentially hazardous threshold</li> <li>• Helps identify areas where hearing protection may need to be worn</li> <li>• Clip to a shirt or jacket</li> </ul>	NI-100	<b>17453-5</b>	10
<ul style="list-style-type: none"> <li>• Charging cord</li> <li>• Sold separately</li> </ul>	NI-CHG	<b>17475-9</b>	

**See Warning on Page 110**



## Hearing Conservation





3M offers a wide variety of solutions to help reduce noise exposure. A full line of comfortable, easy-to-use hearing protectors, including earplugs, ear muffs, and banded hearing protectors are available from 3M.

Product Number/Description	Model	UPC (051138-)	Qty./Case
<b>3M™ Foam Earplug 1100 and 3M™ Corded Foam Earplug 1110</b>			
 247043  247035	1100 (uncorded)	<b>29008-0</b>	1000 Pairs
	1110 (corded)	<b>29009-7</b>	500 Pairs
<ul style="list-style-type: none"> <li>• Smooth dirt resistant surface and tapered shape fit the ear canal and provide added comfort and hygiene</li> <li>• Hypo-allergenic material</li> <li>• Each package is easy to dispense</li> <li>• Noise Reduction Rating: 29 dB*</li> <li>• Available in corded and uncorded versions</li> </ul>			
Product Number/Description	Model	UPC (80529-)	Qty./Case
<b>3M™ E-A-Rsoft™ Yellow Neons™</b>			
 	312-1250 (uncorded)	<b>12063-9</b>	2000 Pairs
	311-1250 (corded)	<b>11033-3</b>	
<ul style="list-style-type: none"> <li>• Noise Reduction Rating: 33 dB* (Highest NRR available)</li> <li>• Soft foam provides low pressure with excellent attenuation</li> </ul>			
<b>3M™ E-A-R™ UltraFit™</b>			
	340-4003 (uncorded)	<b>40002-1</b>	400 Pairs
	340-4004 (corded)	<b>40003-8</b>	
	340-4002 (corded w/case)	<b>40001-4</b>	200 Pairs
<ul style="list-style-type: none"> <li>• Noise Reduction Rating: 25 dB*</li> <li>• Patented flange design for comfortable fit</li> <li>• Conforms to oval shape of ear</li> <li>• Washable, promotes worker hygiene</li> <li>• No rolling or touching plug portion during insertion</li> </ul>			
<b>3M™ E-A-R™ Push-Ins™ with Grip Rings</b>			
	318-1008 (uncorded)	<b>18010-7</b>	2000 Pairs
	318-1009 (corded)	<b>18011-4</b>	
<ul style="list-style-type: none"> <li>• Shaped for comfort and gripped for fit</li> <li>• Noise Reduction Rating: 30 dB*</li> <li>• Easy fit with no roll down required</li> <li>• Foam softens with body heat</li> <li>• Grip Ring design to gently hug ear canal</li> </ul>			
<b>3M™ E-A-R™ Push-Ins™</b>			
	318-1000 (uncorded)	<b>18017-9</b>	400 Pairs
	318-1001 (corded)	<b>18017-9</b>	
<ul style="list-style-type: none"> <li>• Easy fit with no roll down required</li> <li>• Noise Reduction Rating: 28 dB*</li> <li>• EARform™ yellow foam tip for great comfort</li> <li>• Blue stem allows for hygienic insertion and removal</li> </ul>			

\* Research suggests that many users will receive less noise reduction than indicated by the NRR due to variation in earplug fit and wearing time. It is recommended that the NRR be reduced by 50% for estimating the average amount of noise reduction provided.

**See Warning on Page 110**

## Hearing Conservation (cont.)

Product Number/Description	Model	UPC (80529-)	Qty./Case
<b>Semi-Insert Hearing Protectors</b>			
<b>3M™ E-A-Rflex™ Banded Hearing Protector</b>			
 <ul style="list-style-type: none"> <li>• Noise Reduction Rating: 25 dB*</li> <li>• Highest NRR for a semi-insert in all three positions</li> <li>• Comfortable, lightweight alternative to earmuffs</li> <li>• Band helps prevent loss and is good for intermittent use</li> </ul>	350-1001 (band w/tips)	<b>50007-3</b>	10/Box
	350-1002 (replacement tips)	<b>50008-0</b>	5 Pair/Pack
<b>3M™ E-A-R™ One Touch™ Base and “No Waste Funnel” with Classic™ and Yellow Neon™ Plugs Banded Hearing Protector</b>			
 <ul style="list-style-type: none"> <li>• Patented “No Waste Funnel” allows users to reuse base and dispenser</li> <li>• One Touch™ base can be used as a table top unit or wall mounted</li> <li>• Easy access for the user from all sides</li> <li>• No waste of packaging for individual earplugs</li> </ul>	391-1000 (dispenser)	<b>91000-1</b>	1/Box
	391-1001 (Classic™ replacement bottle)	<b>91001-8</b>	2000 Pairs
	391-1004 (Yellow Neon™ replacement bottle)	<b>91004-9</b>	
Product Number/Description	Model	UPC (93045-)	Qty./Case
<b>3M™ Peltor™ Optime™ 95 Banded Hearing Protector</b> <b>NEW!</b>			
 <ul style="list-style-type: none"> <li>• Ideal against high-frequency noise with work areas including machine shops and power tools</li> <li>• Ultra light with liquid/foam filled ear cushions</li> <li>• Low profile earmuff and headband</li> <li>• NRR 21 dB*</li> </ul>	H6A/V (Headband style)	<b>08061-5</b>	10/Case
	H6B/V (Neckband style)	<b>08062-2</b>	
	H6P3E/V (Helmet-attachment style)	<b>08065-3</b>	
<b>3M™ Peltor™ Optime™ 101 Banded Hearing Protector</b> <b>NEW!</b>			
 <ul style="list-style-type: none"> <li>• Excellent attenuation at low and high frequencies</li> <li>• Enables safe working environment for longer periods of time, up to 101dBA</li> <li>• Two low mounting points provide great comfort</li> <li>• H7A: NRR 27 dB*</li> <li>• H7B: NRR 26 dB*</li> <li>• H7P3E: NRR 24 dB*</li> </ul>	H7A (Headband style)	<b>08071-4</b>	10/Case
	H7B (Neckband style)	<b>08072-1</b>	
	H7P3E (Helmet-attachment style)	<b>08073-8</b>	

\* Research suggests that many users will receive less noise reduction than indicated by the NRR due to variation in earplug fit and wearing time. It is recommended that the NRR be reduced by 50% for estimating the average amount of noise reduction provided.






\*\* Order using prefix 93045.

See Warning on Page 110



## Protective Eyewear

3M eye protection products help provide wearer comfort, safety and a fashionable look. They are available in several designs to meet the needs of a wide variety of people and conditions.

Product Number/Description	Model	Color (Frame/Lens)	UPC (78371-)	Qty./Case
<b>3M™ Virtua™ Protective Eyewear</b>				
 <ul style="list-style-type: none"> <li>• Popular unisex styling</li> <li>• Lightweight frame—less than 1 oz.</li> <li>• Meets ANSI Z87.1-2003 standards</li> <li>• Contoured flexible temples for comfortable fit</li> <li>• Hard coat guards against scratching, static and chemical attack</li> </ul>	11326-00000-20	Clear/ Clear Hard coat	<b>11326-8</b>	10/Box
	11327-00000-20	Gray/ Gray Hard coat	<b>11327-5</b>	
<b>3M™ Virtua™ V4 Protective Eyewear</b>				
 <ul style="list-style-type: none"> <li>• Soft, dual injected temples for comfortable, all day wear</li> <li>• Popular unisex styling</li> <li>• Rugged polycarbonate lens construction</li> <li>• Lightweight</li> <li>• Meets ANSI Z87.1-2003 standards</li> </ul>	11670-00000-20	Black/ Clear Hard coat	<b>11670-2</b>	10/Box
	11674-00000-20	Black/ Indoor/Outdoor Mirrored	<b>11674-0</b>	
<b>3M™ Lexa™ Protective Eyewear</b> 				
 <ul style="list-style-type: none"> <li>• Extra wide viewing range and contoured design</li> <li>• Lightweight, full coverage eye protection</li> <li>• Fully customizable with multiple lens options, three lens angles and four temple lengths</li> <li>• Meets ANSI Z87.1-2003 and CSA Z94.3-2007</li> </ul>	15200-00000-20	Clear AF Lens/ Black Temple	<b>62287-6</b>	20/Case
	15250-00000-20	MinimlzeR™ Lens/ Black Temple	<b>62299-9</b>	
 <ul style="list-style-type: none"> <li>• Designed for workers who have difficulty reading small print or who are engaged in small detail work (13415: +1.5 Diopter; 13416: +2.0 Diopter; 13417: +2.5 Diopter)</li> <li>• Lightweight, full coverage design</li> <li>• Multiple lens options, angles and temple lengths</li> <li>• Meets ANSI Z87.1-2003 and CSA Z94.3-2007</li> </ul>	13415-00000-20	MinimlzeR™ Lens/ Black Temple	<b>13415-7</b>	
	13416-00000-20	MinimlzeR™ Lens/ Black Temple	<b>13416-4</b>	
	13417-00000-20	MinimlzeR™ Lens/ Black Temple	<b>13417-1</b>	



See Warning on Page 110



## 3M™ Sorbents

**3M™ Maintenance Sorbents:** Fast acting, highly absorbent, easy to use and absorb almost any type of non-aggressive liquids such as oils, coolants, hydraulic fluids and water. Its high fluid capacity means the need to change the sorbent is less frequent, saving on material, labor and disposal costs.

**3M™ Petroleum Sorbents:** Sorbs oil and other petroleum-based liquids while repelling water. Available in a variety of configurations to best suit your needs including: folded, pads, booms, pillows, sweeps, rolls and drum covers.

Product Number/Description	Model	Size	UPC (051138-)	Qty./Case
<b>3M™ Maintenance Sorbents</b>				
<b>Folded M-FL550DD, High Capacity</b>				
 <p>3835</p> <ul style="list-style-type: none"> <li>• Easy-to-use solution for cleaning up spills, drips and fluid leaks</li> <li>• Versatile: can be used in pillow, pad, roll or boom configuration</li> <li>• Scrim on one side to increase strength and help eliminate linting</li> <li>• Dispenses from a carrying/dispenser box in the form of a continuous roll</li> <li>• Less waste: perforated every 16 inches so you can select the length required</li> <li>• Absorbs 31.5 gallons per case</li> <li>• Applications range from maintenance to spill response</li> </ul>	M-FL550DD	5" x 50'	<b>29071-9</b>	3
<b>Rug M-RG36300E</b>				
 <p>3841</p> <ul style="list-style-type: none"> <li>• Use in areas where foot and vehicle traffic is a concern</li> <li>• Will sorb non aggressive liquids while enduring the punishment of being tread upon</li> <li>• Durable and versatile</li> <li>• Use in industrial maintenance applications</li> <li>• Absorbs 32 gallons per rug</li> </ul>	M-RG36300E	36" x 300'	<b>29002-3</b>	1
<b>Mini-Boom</b>				
 <p>3840</p> <ul style="list-style-type: none"> <li>• Tube-like shape is ideal for placing around machinery to contain spills and prevent leaks from spreading into adjacent work areas</li> <li>• 3 inch diameter scrim on the outside of the boom identifies the use while containing particulate sorbent material designed for the application</li> <li>• Absorbs 12 gallons per case</li> </ul>	M-MB304	3" x 4'	<b>21526-7</b>	12
	M-MB308	3" x 8'	<b>21527-4</b>	6
<b>3M™ Petroleum Sorbents</b>				
<b>Pad HP-156, High Capacity</b>				
 <p>6756</p> <ul style="list-style-type: none"> <li>• Low-profile design can be easily placed in tight areas</li> <li>• Ideal for cleaning up small spills and wiping down contaminated areas</li> <li>• Has a scrim on one side to increase strength and help eliminate linting</li> <li>• Conveniently sized, allows the user to quickly spread sorbent over and in the path of a spill</li> <li>• Can also be used on a work surface in anticipation of a spill or as a wipe</li> <li>• Absorbs 37.5 gallons per bale</li> </ul>	HP-156	17" x 19"	<b>28911-4</b>	100
<b>Product Number/Description</b>				
<b>Pad T-151</b>				
 <p>6714</p> <ul style="list-style-type: none"> <li>• This highly sorbent pad features a low-profile design for easy placement in tight areas</li> <li>• Ideal for cleaning up small spills and wiping down contaminated areas</li> <li>• Absorbs 43.5 gallons per bale</li> </ul>	T-151	17" x 19"	<b>16049-3</b>	200

See Warning on Page 110

## Safety Warnings



### **⚠ WARNING: RESPIRATORS**

These respirators help protect against certain airborne contaminants. Before use, the wearer must read and understand the *User Instructions* provided as a part of the product packaging. A written respiratory protection program must be implemented meeting all the requirements of OSHA 1910.134 including training, fit testing and medical evaluation. In Canada, CSA standards Z94.4 requirements must be met and/or requirements of the applicable jurisdiction, as appropriate. **Misuse may result in sickness or death.** For proper use, see package instructions, supervisor, or call 3M Occupational Health and Safety Division (OH&ESD) Technical Service in U.S.A. at 1-800-243-4630. In Canada, call 1-800-267-4414.

### **⚠ WARNING: WELDING PRODUCTS**

These welding safety products must be used only by qualified persons trained in their use and maintenance and only in strict accordance with and adherence to the detailed instructions and precautionary statements provided in the instruction manual which accompanies each product. **Failure to comply with these instructions could result in sickness, serious bodily injury or death.** For proper use of these products read *User Instructions* and WARNINGS on the package. Any questions concerning proper use should be directed to your supervisor, on-site training specialist, industrial hygienist or 3M Occupational Health and Safety Division (OH&ESD) Technical Service in the U.S.A. at 1-800-243-4630. In Canada, call 1-800-267-4414.

### **⚠ WARNING: HEARING PROTECTION**

These hearing protectors help reduce exposure to hazardous noise and other loud sounds. **Misuse or failure to wear hearing protectors at all times that you are exposed to noise may result in hearing loss or injury.** For proper use, see supervisor, *User Instructions*, or call 3M Occupational Health and Environmental Safety Division (OH&ESD) Technical Service in the U.S.A. at 1-800-243-4630. In Canada, call 1-800-267-4414. If there is any drainage from your ear or you have an ear infection, consult with your physician before wearing ear plugs. Failure to do so may result in hearing loss or injury.

### **⚠ WARNING: PROTECTIVE EYEWEAR**

These eye and face protection products help provide limited eye and face protection. **Misuse or failure to follow warnings and instructions may result in serious potential injury, including blindness or death.** For proper use, selection, and applications against flying particles, optical radiation and/or splash see supervisor, read *User Instructions* and WARNINGS on the package, or call 3M Occupational Health and Environmental Safety Division (OH&ESD) Technical Service in the U.S.A. at 1-800-243-4630. In Canada, call 1-800-267-4414.




### **⚠ WARNING: SORBENTS**

**Failure to properly handle and dispose of sorbents contaminated by hazardous materials can result in serious physical injury or death and/or environmental harm.** For proper handling, consult the Material Safety Data Sheet for the material absorbed, applicable safety and health standards, contact your supervisor, or call 3M Occupational Health and Environmental Safety Division (OH&ESD) Technical Service at 1-800-243-4630. To reduce the risk of serious physical injury or death, always use respiratory protection and protective clothing appropriate for handling the material to be absorbed. Transportation and disposal of spent sorbents must comply with all applicable federal, state and local laws and regulations. Caution: Sorbents may become slippery when used on flooring. Do not walk on sorbent or place in high traffic areas.


## 3M™ Maintenance Aerosols

**3M™ Maintenance Aerosols:** 3M's line of aerosol cleaners are the fast and easy solution for removing grease, grime, inks, and residues on electrical equipment and components.



Product Number/Description		Size	UPC (021200-)	Qty./Case
<b>3M™ 5-Way Penetrant</b>				
 <p>243698</p>	<ul style="list-style-type: none"> <li>• Inhibits rust and corrosion by spreading a thin, even film that actually penetrates the pores of the surface</li> <li>• It displaces moisture and "dries out" electrical parts and equipment to help prevent shorting and increase conductivity</li> <li>• Spray it on to free rusted, frozen bolts, nuts, and screws</li> <li>• Lubricate delicate machines and precision instruments</li> <li>• Penetrates and demotesurizes</li> <li>• Ideal as a tapping lubricant for stainless steel and aluminum</li> <li>• Contains no methylene chloride, 1, 1, 1-trichloroethane or chlorofluorocarbons</li> </ul>	24 fl. oz.	<b>21305-2</b>	12
<b>3M™ Citrus Base Cleaner</b>				
 <p>243700</p>	<ul style="list-style-type: none"> <li>• Multi-purpose cleaner</li> <li>• Will dissolve and flush away dirt, grease, tar, most noncuring type adhesive films and similar substances</li> <li>• Citrus oil-based cleaner that emulsifies when flushed with water</li> <li>• Contains no petroleum distillates</li> <li>• Use to clean and degrease metal parts, motors, tools, printing presses and concrete</li> <li>• Contains no methylene chloride, 1, 1, 1-trichlorofluorocarbons</li> </ul>	24 fl. oz.	<b>76394-6</b>	12
Product Number/Description		Size	UPC (048011-)	Qty./Case
<b>3M™ Stainless Steel Cleaner and Polish</b>				
 <p>221761</p>	<ul style="list-style-type: none"> <li>• Cleans and polishes stainless steel, chrome aluminum and laminated plastic surfaces</li> <li>• High gloss in one step</li> <li>• Contains no ozone depleting chemical</li> </ul>	21 fl. oz.	<b>14002-0</b>	12

## 3M™ Electrical Products

Product Number/Description		Size	UPC (054007-)	Qty./Case
<b>Scotch® Vinyl Electrical Tape Super 33+</b>				
 <p>2040</p>	<ul style="list-style-type: none"> <li>• Provides primary electrical insulation for splices up to 600V</li> <li>• Abrasion corrosion and UV-resistant</li> <li>• Makes an excellent protective jacketing for high-voltage cables and wire harnessing</li> <li>• UL listed and CSA certified</li> <li>• Resists alkalis and acids, flame retardant</li> <li>• Excellent all-weather performance in cold to 0°F (-18°C) or hot to 220°F (105°C)</li> </ul>	3/4" x 66'	<b>06132-8</b>	100







479683

## 3M™ Facility Care Products


### 3M™ Safety-Walk™ Matting

Spring-coiled vinyl foam compresses uniformly and continually, providing greater comfort and less fatigue.

Product Number/Description	Color	Size	UPC (048011-)	Qty./Case
<b>3270 (No Edging)</b>				
 <ul style="list-style-type: none"> <li>Economical matting ideal for fatigue resistance in dry environments</li> <li>Textured, solid surface improves traction and allows debris and liquid to stay on top of the mat for easy cleanup</li> <li>Lightweight for easy moving and repositioning</li> <li>No edging</li> </ul>	Black	3' x 5'	<b>34819-3</b>	1
		3' x 10'	<b>34821-6</b>	
		3' x 20'	<b>34823-0</b>	
		4' x 20'	<b>34824-7</b>	
<b>3270E (Black Edging)</b>				
 <ul style="list-style-type: none"> <li>Economical matting ideal for fatigue resistance in dry environments</li> <li>Textured, solid surface improves traction and allows debris and liquid to stay on top of the mat for easy cleanup</li> <li>Lightweight for easy moving and repositioning</li> <li>Integral edging on the long edge of the mat and nosing on the ends</li> </ul>	Black with Black Edging	3' x 5'	<b>34826-1</b>	1
		3' x 10'	<b>34828-5</b>	
		3' x 20'	<b>34830-8</b>	
		4' x 20'	<b>34831-5</b>	

## Utility Cloth Rolls

### 3M™ Portable Utility Roll 314D

Product Number/Description	W x L	Grade	UPC (051141-)	Qty./Case
<b>Utility Rolls</b>				
 <ul style="list-style-type: none"> <li>Portable for ease of use at jobsite</li> <li>Protective plastic pack resists dirt, oil, water and serves as a convenient dispenser</li> <li>Aluminum oxide abrasive product sheets constructed on X- or J-weight, durable cloth backing</li> </ul>	1" x 8 yds.	P60 X	<b>20963-0</b>	1/5
	1" x 12 yds.	P60 J	<b>20964-7</b>	
	1" x 16 yds.	P120 J	<b>20965-4</b>	
	1" x 20 yds.	P180 J	<b>20966-1</b>	
		P240 J	<b>20967-8</b>	
<b>1" Portable Utility Roll Kit</b>				
Kit contains one (1) each of the above utility rolls			<b>20968-0</b>	1/5



### 3M™ Die Grinders


The 3M line of pneumatic die grinders is designed to efficiently handle all your cylindrical polishing, buffing, shaping and deburring needs. Grinders are packed with the power to perform a variety of functions. Built-in comfort innovations include 3M gripping material to help reduce vibration for a more secure grip. And the adjustable directional exhaust feature allows airflow to be directed away in any direction preferred. Plus, 3M offers four different RPM models for a wide variety of applications.

- 90 PSI
- 1 HP (744 W) Motor
- 35 SCFM (991 LPM) Airflow Rate
- Rear Directional Exhaust
- 1/4" NPT air inlet thread



Model No.	Max RPM	Weight Pound (kg)	Length Inch (mm)	Collet Size	UPC
20237	20,000	1.69 (.77)	7.75 (196.9)	1/4"	051141-20237-2
20238	18,000	1.69 (.77)	7.75 (196.9)	1/4"	051141-20238-9
20239	12,000	2.06 (.93)	10 (254)	1/4"	051141-20239-6
20240	8,000	2.06 (.93)	10 (254)	1/4"	051141-20240-2

- 1 High-output thermally balanced air motor
- 2 Directional exhaust (360 degree)
- 3 3M gripping material
- 4 Safety lever throttle to avoid accidental starting
- 5 Tandem double-sealed bearings
- 6 Double-taper collet assembly
- 7 Offset gear box for increased torque

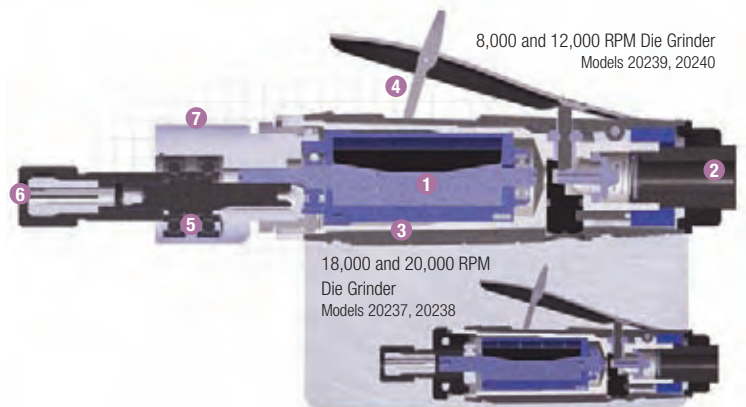

### 3M™ Non-Vacuum Random Orbital Sanders

Powerful and popular non-vacuum tools meet or exceed highest performance standards.

- Available in 1-1/4", 3", 5" and 6" diameters
- .28 HP Motor
- Full range of orbits available
- Includes 3M™ Stikit™ Disc Pads\*

\*Model 20250 includes 3M™ Hookit™ Pad.



Model No.	Orbit Dia. Inch (mm)	Weight Pound (kg)	Length Inch (mm)	Height Inch (mm)	Pad Included	UPC
<b>Tool Diameter: 3" (77mm) Max RPM: 12,000 Motor: .28 HP (209 W) Airflow Rate: 17 SCFM (481 LPM)</b>						
20250	3/16 (5)	1.65 (.75)	4.90 (124.33)	3.10 (78.61)	Hookit™ 20350	051141-20250-1
20314	3/32 (2.5)	1.12 (.51)	4.90 (124.33)	3.10 (78.61)	Stikit™ 20348	051141-20314-0
<b>Tool Diameter: 5" (127mm) Max RPM: 12,000 Motor: .28 HP (209 W) Airflow Rate: 17 SCFM (481 LPM)</b>						
20253	5/16 (8)	1.65 (.75)	5.89 (149.6)	3.26 (82.9)	Stikit™ 20351	051141-20253-2
20317	3/16 (5)	1.65 (.75)	5.89 (149.6)	3.26 (82.9)	Stikit™ 20351	051141-20317-1
20320	3/32 (2.5)	1.59 (.72)	5.84 (148.4)	3.26 (82.9)	Stikit™ 20351	051141-20320-1
<b>Tool Diameter: 6" (150mm) Max RPM: 12,000 Motor: .28 HP (209 W) Airflow Rate: 17 SCFM (481 LPM)</b>						
20324	5/16 (8)	1.78 (.81)	6.39 (162.3)	3.26 (82.9)	Stikit™ 20354	051141-20324-9
20325	3/16 (5)	1.74 (.79)	6.39 (162.3)	3.26 (82.9)	Stikit™ 20354	051141-20325-6
20328	3/32 (2.5)	1.68 (.76)	6.34 (161.1)	3.26 (82.9)	Stikit™ 20354	051141-20328-7

### 3M™ Random Orbital Sanders, 2-hand

For extra leverage and power, choose the two-handed 3M™ Random Orbital Sander.

- 6" Central/Non-Vac, 3/8" orbit
- .45 HP
- Rear exhaust — Internal muffler
- 2-hand functionality with/without removable side handle
- Side handle included



Model No.	Vacuum	Orbit Dia. Inch (mm)	Weight Pound (kg)	Length Inch (mm)	Height Inch (mm)	Clean Sanding Pad Included	UPC
<b>Tool Diameter: 6" (150mm)</b>		<b>Max RPM: 12,000</b>		<b>Motor: .45 HP (336 W)</b>		<b>Airflow Rate: 21 SCFM (594 LPM)</b>	
28337	Central/Non-Vac	3/8 (9.5)	2.90 (1.32)	12.93 (328.3)	4.43 (112.6)	Hookit™ 20356	051141-28337-1

### 3M™ Buffers

Lightweight tool designed for use in AOEM paint shop applications for buffing or polishing on the clearcoat. Use with 3M™ Finesse-it™ Polishes and Foam Buffing Pads for a uniform finish.

- Powerful .26 HP motor
- Non-marring handle with comfortable 3M gripping material
- MOS: 11,000 RPM, internal muffler
- Includes 3M™ Hookit™ Disc Pad (PN20350)



Model No.	PSI	Weight Pound (kg)	Air Flow Rate SCFM (LPM)	Air Inlet Thread	Length Inch (mm)	Height Inch (mm)	UPC
<b>Tool Size: 3" (75mm)</b>		<b>Max RPM: 11,000</b>		<b>Motor: .26 HP (194 W)</b>			
28333	90	1.8 (.82)	17 (481)	1/4" NPT	9.18 (233)	3.92 (99.6)	051141-28333-3

### 3M™ Mini-Random Orbital Sander and Nib Removal Sander

Use with the 3M™ Trizact™ Finesse-it™ Paint Repair System. Lightweight, this unique one-piece shaft balancer system supports the low profile design and improved control.

- Compact design/low profile
- Quieter operations
- "Flush" speed control lever limits RPM change
- Includes 3M™ Finesse-it™ Roloc™ Sanding Pad (PN02345)



Model No.	PSI	Weight Pound (kg)	Air Flow Rate SCFM (LPM)	Length Inch (mm)	Height Inch (mm)	Pad Included	UPC
<b>Tool Size: 1-1/4" x 3/16"</b>		<b>Max RPM: 8,000</b>		<b>Motor: .27 HP (201 W)</b>			
20244	90 (6.2)	1.10 (.498)	15 (425)	4.72 (120)	3.32 (84.5)	Roloc™ 02345 w/Stikit™ Face	051141-20244-0
<b>Tool Size: 1-1/4" diameter</b>		<b>Max RPM: 7,500</b>		<b>Motor: .067 HP (50 W)</b>			
03125	57-90	1.05 (.48)	5.3 (150)	6.5 (165)	2.875 (73)	Finesse-it™ PSA Hard Pad 3125H	051111-60536-3

### 3M™ Orbital Sander 3" x 4"

For flat surface finishing, sealer sanding and working in tight corners.

- .24 HP
- Includes 3M™ Hookit™ Backup Pad



Model No.	Vacuum	Weight Pound (kg)	Length Inch (mm)	Height Inch (mm)	Pad Included	UPC	
<b>Tool Size: 3" x 4" (75 x 100mm)</b>		<b>Max RPM: 10,000</b>		<b>Motor: .24 HP (179 W)</b>		<b>Airflow Rate: 17 SCFM (481 LPM)</b>	
20331	Non-Vac	1.43 (.65)	5.48 (139.3)	3.28 (83.5)	Hookit™ 20433	051141-20331-7	


### 3M™ File Belt Sander

Ideally suited for use with 3M™ Abrasive Belts and Scotch-Brite™ Belts for a variety of metalworking applications. Grind and blend from contact wheel or platen, finish and polish from slack of belt.

- 0.6 HP; 22,000 RPM; 4990 SFPM
- Belt Size: 1/8"–3/4" W x 18"–24" L  
(3mm–9mm W x 457mm–610mm L)
- Standard attachment arm (PN28368)
- Eight different attachment arms are available
- Easily interchangeable steel drive wheel is attached; rubber drive wheel is included
- 0.5 oz. sample of 3M™ Air Tool Lubricant (PN20451) included
- 24" belts require 3M™ File Belt Sander Extension (PN 28376)



Model No.	Motor	Motor Speed RPM	Belt Speed SFPM (SMM)	Weight Pound (kg)	Length Inch (mm)	Height Inch (mm)	Width Inch (mm)	UPC
28366	0.6 HP	22,000	4990 (1521)	2.8 (1.3)	14.57 (370)	2.93 (74.5)	5.95 (151.2)	051141-28366-1

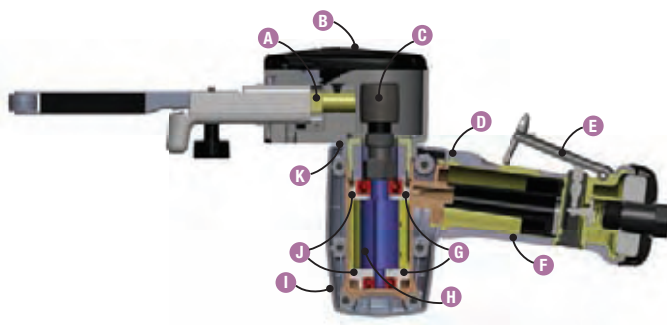

- A** Hardened Steel Arm Post – provides stability
- B** Metal Shielded Composite Belt Cover
- C** Easily Interchangeable Steel or Rubber Drive Pulley
- D** 360° Rotatable Handle
- E** Smooth Action Safety Lever – helps prevent accidental starting
- F** Comfortable 3M gripping material
- G** Steel Endplates – provide stability for more power; longer motor life
- H** Hardened Steel Rotor – delivers more torque; provides wear resistance
- I** Lightweight Reinforced Composite Housing
- J** Contamination Resistant Double Shielded Precision Bearings
- K** 360° Rotatable Belt Housing/Guard

### 3M™ File Belt Sander Kit

This convenient kit comes packed in a molded case and includes:

- 3M™ File Belt Sander (PN 28366)
- 2 popular attachment arms (PNs 28368 and 28370)
- 0.5 oz. sample of 3M™ Air Tool Lubricant (PN20451)
- Steel and rubber drive wheels

Model No.	UPC
28367	051141-28367-8



### 3M™ Inline Sanders 1 HP (744W)

Generate straight line scratches for finishing stainless steel and other metals. These straight shaft sanders can be used with inflatable or slotted wheel accessories. (3M recommends PNs 28348 or 28349 rubber slotted expander wheels.)

- More consistent finishes
- Less likely to product chatter
- 1 HP
- 5/8"–11 Threaded Ext. shaft
- Use #3 Wheel Adaptor Kit (PN45038) to mount wheel to inline sander
- 3M gripping material
- Available maximum RPMs: 1,600 and 3,500



Model No.	Max RPM	Weight Pound (kg)	Length Inch (mm)	Air Inlet Thread	Collet Size	UPC
28338	1,600	3.32 (1.51)	9.88 (251)	1/4" NPT	5/8"–11	051141-28338-8
28339	3,500	2.64 (1.20)	8.50 (216)	1/4" NPT	5/8"–11	051141-28339-5

### 3M™ Disc Sanders


3M got the right angle “right” with the new line of Disc Sanders for metalworking. By adjusting the head angle from 90° to 97°, a more comfortable wrist position improves operating ergonomics. And the easier-handling, lightweight, compact design generates less vibration, while improving operator control. 3M gripping material provides a secure grip with less effort and is easy to maneuver. And the adjustable directional exhaust feature works the way you want it to.

- 90 PSI
- 1/4" NPT air inlet thread



Model No.	Motor	Weight Pound (kg)	Length Inch (mm)	Height Inch (mm)	Airflow Rate SCFM (LPM)	Exhaust Direction	UPC Code
<b>Tool Diameter: 2" (50mm) Max RPM: 12,000</b>							
28328	.3 HP (223 W)	1.09 (.49)	5.91 (150.2)	2.5 (63.5)	17 (481)	Rear Directional	051141-28328-9
28329	.5 HP (372 W)	1.28 (.58)	6.75 (171.5)	2.75 (69.9)	23 (651)	Rear Directional	051141-28329-6
<b>Tool Diameter: 2" (50mm) Max RPM: 20,000</b>							
28341	.3 HP (223 W)	1.09 (.49)	5.91 (150.2)	2.5 (63.5)	17 (481)	Rear Directional	051141-28341-8
20231	.5 HP (372 W)	1.28 (.58)	6.75 (171.5)	2.75 (69.9)	23 (651)	Rear Directional	051141-20231-0
<b>Tool Diameter: 3" (76mm) Max RPM: 15,000</b>							
20232	1 HP (744 W)	1.97 (.89)	8.25 (209.6)	3.25 (82.6)	35 (991)	Rear Directional	051141-20232-7


- 1 High-output air motor
- 2 Directional exhaust (360 degree\*)
- 3 3M gripping material
- 4 Safety lever throttle to avoid accidental starting
- 5 Needle and ball bearing supported output spindle
- 6 Robust spiral bevel gearing
- 7 97° head (vs. 90°) allows for more comfortable wrist position
- 8 Direct mount for use with 3M™ Roloc™ Backup Pads without using a collet
- 9 Shorter distance to the workpiece generates less vibration and allows for better control

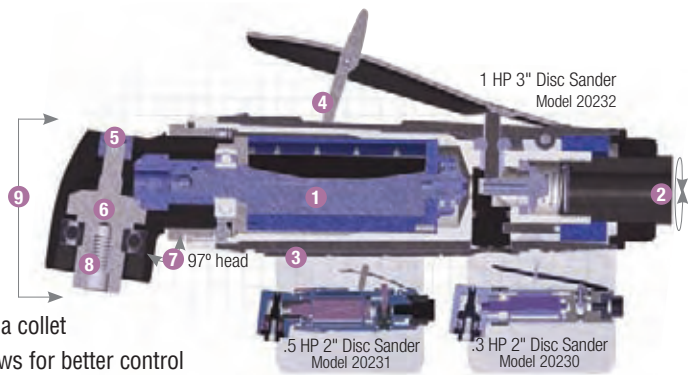

### 3M™ Cut-Off Wheel Tools


Designed to easily handle cutting through everything from standard rebar to oversized bolts, you can count on the performance and dependability of the new line of 3M™ Cut-Off Wheel Tools. Their compact design and built-in safety features make these the tools of choice for any job. 3M gripping material reduces vibration and provides a secure grip that can be held with less effort. And the adjustable directional exhaust feature works the way you want it to.

- 90 PSI
- 1 HP (744 W) Motor
- 35 SCFM (991 LPM) Airflow Rate
- Rear Directional Exhaust



Model No.	Tool Dia. Inch (mm)	Max RPM	Weight Pound (kg)	Length Inch (mm)	Height Inch (mm)	Air Inlet Thread	UPC
20233	3 (76)	25,000	2.09 (.95)	7.75 (196.9)	3 (76.2)	1/4" NPT	051141-20233-4
20234	4 (100)	20,000	2.25 (1.02)	7.75 (196.9)	3.25 (82.6)	3/8" NPT	051141-20234-1
20235	5 (125)	12,000	3.47 (1.57)	8.75 (222.3)	5.25 (133.4)	3/8" NPT	051141-20235-8
20236	6 (152)	10,000	3.69 (1.67)	8.75 (222.3)	5.25 (133.4)	3/8" NPT	051141-20236-5

- 1 High-output air motor
- 2 Directional exhaust (360 degree)
- 3 3M gripping material
- 4 Safety lever throttle to avoid accidental starting
- 5 Over-sized ball bearings on output spindle
- 6 Robust spiral bevel gearing
- 7 4-place indexable head
- 8 360° rotatable safety guard

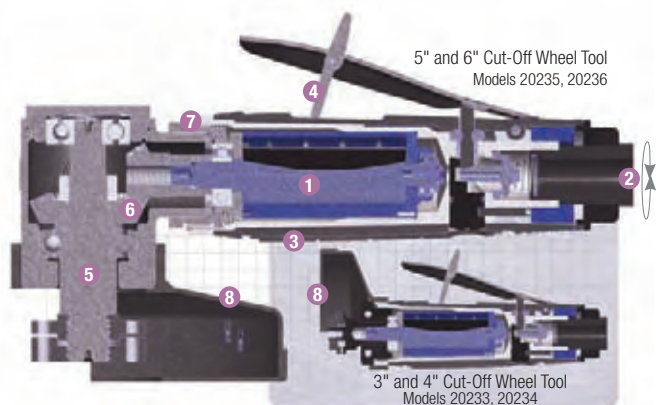

## 3M™ Purification Series NB Liquid Bag Filters

3M™ Purification Series NB liquid bag filter products combine filtration experience and manufacturing expertise to provide high quality, cost effective solutions for those applications where a rated bag filtration is appropriate.



Series NB bag products are available in polypropylene felt and polyester felt in Size #1 and Size #2 configurations in grades ranging from 1–200 microns. The bags feature an all welded construction with a plastic sealing collar for consistent and reproducible filtration.



Series NB bag products are also available in nylon monofilament materials of construction in Size #1 and Size #2 configurations in grades ranging from 25–1200 microns. The high strength and uniform porosity of the NMO bags make them an excellent choice for applications looking for removal of oversized contaminants while allowing for passage of desired fluid particles (metallic paints...).

Size	Micron	UPC	Product ID	Bags Per Case
<b>Polypropylene Felt</b>				
#1	1	016145-18093-4	NB0001PPS1C	50
	5	016145-18099-6	NB0005PPS1C	
	10	016145-18105-4	NB0010PPS1C	
	25	016145-18111-5	NB0025PPS1C	
	50	016145-18117-7	NB0050PPS1C	
	100	016145-18123-8	NB0100PPS1C	
	200	016145-18129-0	NB0200PPS1C	
#2	1	016145-18094-1	NB0001PPS2C	
	5	016145-18100-9	NB0005PPS2C	
	10	016145-18106-1	NB0010PPS2C	
	25	016145-18112-2	NB0025PPS2C	
	50	016145-18118-4	NB0050PPS2C	
	100	016145-18124-5	NB0100PPS2C	
	200	016145-18130-6	NB0200PPS2C	
<b>Polyester Felt</b>				
#1	1	016145-18089-7	NB0001EES1C	50
	5	016145-18095-8	NB0005EES1C	
	10	016145-18101-6	NB0010EES1C	
	25	016145-18107-8	NB0025EES1C	
	50	016145-18113-9	NB0050EES1C	
	100	016145-18119-1	NB0100EES1C	
	200	016145-18125-2	NB0200EES1C	
#2	1	016145-18090-3	NB0001EES2C	
	5	016145-18096-5	NB0005EES2C	
	10	016145-18102-3	NB0010EES2C	
	25	016145-18108-5	NB0025EES2C	
	50	016145-18114-6	NB0050EES2C	
	100	016145-18120-7	NB0100EES2C	
	200	016145-18126-9	NB0200EES2C	

Size	Micron	UPC	Product ID	Bags Per Case	
<b>Nylon Monofilament</b>					
#1	25	016145-18195-5	NB0025NYS1R	50	
	50	016145-18197-9	NB0050NYS1R		
	100	016145-18199-3	NB0100NYS1R		
	150	016145-18201-3	NB0150NYS1R		
	200	016145-18203-7	NB0200NYS1R		
	#1	250	016145-18205-1	NB0250NYS1R	25
		400	016145-18207-5	NB0400NYS1R	
		600	016145-18209-9	NB0005PPS2C	
		800	016145-18211-2	NB0800NYS1R	
1200		016145-18213-6	NB1200NYS1R		
#2	25	016145-18196-2	NB0025NYS2R	50	
	50	016145-18198-6	NB0050NYS2R		
	100	016145-18200-6	NB0100NYS2R		
	150	016145-18202-0	NB0150NYS2R		
	200	016145-18204-4	NB0200NYS2R		
	#2	250	016145-18206-8	NB0250NYS2R	25
		400	016145-18208-2	NB0400NYS2R	
		600	016145-18210-5	NB0600NYS2R	
		800	016145-18212-9	NB0800NYS2R	
		1200	016145-18214-3	NB1200NYS2R	

### 3M™ Purification Series NB Liquid Bag Filter Specifications and Operating Parameters

	Size #1	Size #2
Dimensions	7" OD x 16" L	7" OD x 32" L
Max. Operating Temperature	180°F/82°C (polypropylene felt) 300°F/149°C (polyester felt, NMO)	
Max. Recommended Flow	90 gpm	180 gpm
Recommended Changeout Differential Pressure	20 psid	